

HIGH ADHESIVE ROOFING TAPE

Roofing Tape® is a self- adhesive tape made of a butyl rubber compound, self Protected by a Double sided releasepaper, available in various sizes/ colors..

Roofing Tape® is highly adhesive to all materials and especially to plastic, glass, steel, polycarbonate, wood, asbestos, fiberglass, textiles and concrete as well.

DIMENSIONS AND PACKAGING STANDARD

Length : 5 Mtr /10 Mtr.

Standard Thickness : 1.5 mm To 10 mm

Standard Widths : 6 mm- 100 mm

Other widths, length and thickness are available on request.



The Rolls are packed in Corrugated Boxes.

CHARACTERISTICS

- Cold Applied.
- Waterproof.
- Excellent adhesive properties at low temperatures.
- Excellent heat stability.
- No flowing under heat.
- No Oil Migration.
- Resistant to ageing and UV-rays.
- Solvents Free.

TECHNICAL DATA

CHARACTERISTICS	STANDARD VALUE
MATERIAL/GRADE	BUTYL RUBBER SEALANT TAPE
PEEL ADHESION	VERY GOOD TO FERROUS, NON-FERROUS & PLASTICS METALS
SOLIDS	100%
HEAT AGEING AS PER ISO-188	NO FLOW AND CRACKS
APPLICATION TEMPERATURE	0°C / +45°C
SERVICE TEMPERATURE	0°C / +100°C
SPECIFIC GRAVITY AS PER IS SCALE	1.5 g/cm ² +/- 0.15MM
TENSILE STRENGTH	1.3 KG/ SQ.CM
SHEAR STRENGTH	1 KG /SQ. CM
ELONGATION	800% MIN
TOXICITY	NON- TOXIC
COLOUR	BLACK/GREY/WHITE

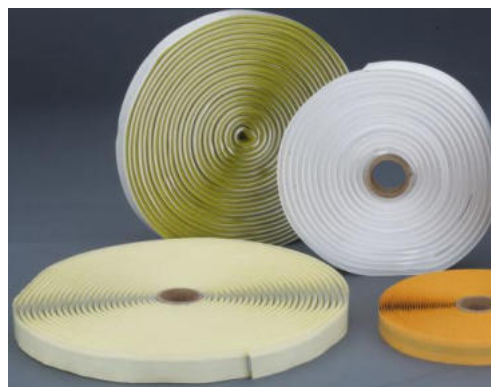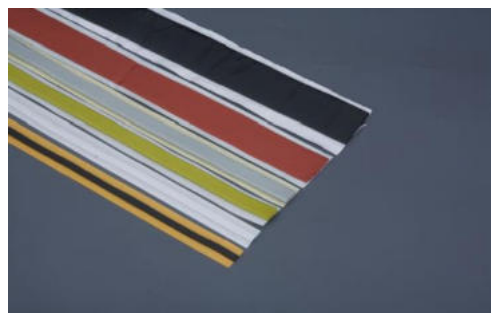

APPLICATIONS

Waterproofing, sealing and jointing materials such as glass, steel, polycarbonate, wood, Aluminium, pvc, industrial roofing, pipes, cable, refrigeration and many other domestic applications

SURFACE PREPARATION

Roofing Tape[®] is compatible with most building materials, metals and flexible or hard plastics. The Surface should be clean, dry, smooth and dust-free. No Special tools are required to install this tape.

INSTALLATION

Prepare the surface and proceed as follows;

- Choose the most suitable size of the **Roofing Tape[®]**
- Unroll the Tape until the desired length is reached.
- Remove the silicone release film that covers the adhesive part of the tape and position the tape.
- Press with a roller or a cloth pad.

STORAGE

The quality and the characteristics of materials remain unaltered for a long period of time.

The Product is however best used within 12 months. The Product must be correctly stored in cool and dry premises, at or below 25°C room temperature. It is not affected by Frost

CAUTION AND SAFETY

The material is not hazardous for normal uses. Keep out of reach of children. Possible handling risks; cuts and Abrasions in particular conditions.

IMPORTANT NOTES

The manufacturer disclaims all liability for product use and applications.

No generic guarantees can be provided, even if the instructions indicated on this sheet are followed.