

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS







www.dishaagroup.com

UNITED ARAB EMIRATES

DISHAA MACHINERY & TOOLS LLC

Al Garhoud - Deira Dubai, U.A.E

DISHAA MACHINERY & TOOLS LLC Br. 1

Showroom No.8 Jurf Industrial 2 - Ajman, U.A.E

DISHAA INTERNATIONAL LLC

Al Garhoud - Deira PO Box: 80899, Dubai, U.A.E

Tel: +971 43290050

Email: dishaaintl@gmail.com / sales@dishaagroup.com design@dishaagroup.com / enquiry@dishaagroup.com

PEOPLE'S REPUBLIC OF CHINA

DISHAA MACHINERY & TOOLS LLC

Office Suite: 504C, Tower - 15, Fifth Floor Smart City, Chancheng - Foshan GuangDong, P.R.C

Distributed by:







1.	ABOUT US	2
2.	NC Press Brake	4
3.	CNC Press Brake	8
4.	Hydraulic Guillotine Shearing Machine	16
5.	Hydraulic Swing Beam Shearing Machine	20
6.	Fiber Laser Cutting Machine	22
7.	Fiber Laser Cutting with tube cutting	28
8.	2 in 1 Laser Plasma Machine	32
9.	Air Compressors	34
10.	Fiber Laser Marking Machine	44
11.	Handheld Laser Marking Machine	52
12.	Laser Cleaning Machine	54
13.	Laser Welding Machine	56
14.	Dot Peen Marking Machine	58
15.	Nitrogen Generator	62
16.	CNC Table Type Plasma Cutting Machine	68
17.	CNC Gantry Type Plasma Cutting Machine	69
18.	Hydraulic Plate Rolling Machine	70
19.	Iron Worker	76
20.	Hydraulic Press	78
21.	Pneumatic Press	80
22.	Power Press	90
23.	Arbor Press Belt Grinder	91
24.	NC Lathe Machine	92
26.	CNC Lathe Machine	108
27.	CNC Vertical Lathe Machine	118
28.	EDM Drilling Machine	126
29.	CNC EDM wire cut Machine	132
30.	Drilling & Tapping Machine	140
31.	Electric Tapping Machine	141
32.	Bench Drilling Machine	142
33.	Magnetic Drilling Machine	143
34.	Vertical Drilling Machine	144
35.	Radial Drilling Machine	150
36.	Drilling & Milling Machine	160
37.	Vertical Milling Machine	168
38.	Horizontal Milling Machine	170
39.	Turret Milling Machine	172
40.	Rotary Head Milling Machine	176
41.	Bed Type Milling Machine	174
42.	Vertical Machining Centre	180
43.	Shaper Machine	184
44.	Circular Saw Machine	186
45.	Hacksaw Machine	187
46.	Bandsaw Machine	188
47.	Surface Grinder	196
48.	3 in 1 Combination of Shear, Brake & Roll	204
49.	Electric & Manual Shearing Machine	206
50.	Manual Shearing Machine	207
51.	Manual Folding Machine	208
52.	Pan & Box Brake Machine	209
53.	Slip Roll Machine	210
54.	Bead Bending Machine	212
55.	Rotary Machine	213
56.	Bench Grinder	214
57.	Lock Former	215
58.	NC Pipe Bending Machine	216
59.	CNC Pipe Bending Machine	220
60.	Manual Pipe Bending Machine	224
61.	Electric Pipe Bending Machine Profile Bending Machine	225
62. 63.	Profile Bending Machine Pipe Threading Machine	230
64.	Pipe Support Stand	231
65.	Hand Pallet truck	232
66.	Stacker	233
67.	Flat Bed Trailer	240
٠,,	THE BOOK TIMES	



Certificates















About us

At Dishaa, we are committed to powering progress through precision, reliability, and service excellence. Established in the United Arab Emirates, we have grown into a trusted provider of high-quality industrial machinery, tools, and equipment, catering to diverse sectors including manufacturing, metalworking, construction, and fabrication.

We take pride in being both ISO certified and ICV (In-Country Value) certified, reflecting our commitment to international quality standards and our active contribution to the UAE's economic development goals. These certifications reinforce our dedication to operational excellence, local value creation, and continuous improvement across all areas of our business.

Our product range includes an extensive selection of sheet metal machinery, precision tool room machines, and spare parts from globally recognized manufacturers. At Dishaa, we don't just supply tools—we deliver comprehensive industrial solutions backed by strong technical expertise and after-sales support.

What sets us apart is our focus on customer satisfaction, quality assurance, and value-added service. Whether you're a small workshop or a large industrial operation, we are here to support your success with the right tools and technologies.

Our Mission

To provide reliable, high-performance machinery and tools that empower businesses to achieve greater productivity and precision.

Our Vision

To be the preferred industrial solutions provider in the region, known for integrity, innovation, and excellence.

Our Clients











































Torsion Bar Press Brake

Performance

The bending machine frame is integrally processed by a large floor boring and milling machine.

The forged material shaft body has good rigidity and elasticity, and has a fine adjustment device, which is weak against the partial load.

The user can customize the mold segments 10, 15, 20, 30, 50, 100, 300 (cm).

Use ESTUN or DELEM brand CNC system for users to choose.

In the system, the plate thickness and length parameters are input, and the system will automatically perform deflection compensation.

It adopts ball screw and linear guide, which is driven by servo motor, and the back gauge is positioned quickly and accurately.

The height of the finger is designed from the overall adjustment, and the height of the finger can be


Improve the replacement mold speed and improve work efficiency.



Optional Controllers


China ESTUNE300 - E300P Holland DELEM DA41T German ELGO P40 Italy HT072 Swiss Cybelec Touch 8

Sample Display







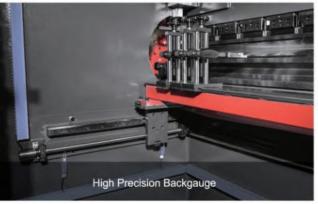





Torsion Bar Plate Press Brake



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

PRESS



Dishaa®

NC Controller



E21

Positioning control of back gauge.

Intelligent positioning control.

One-side and two-side positioning which eliminates

spindle clearance effectively.

Retract functions

Automatic reference searching.

One-key parameter backup and restore.

Fast position indexing.

40 programs storage space, each program has 25 steps. Power-off protection.



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

125T/3200mm E21



DA-41T

Panel based housing Bright LCD screen Beam stop control (Y) Backgauge control (X) Retract functionality Manual movement of all axes Backgauge control (R) (DA-42T) Crowning function (DA-42T) Pressure control (DA-42T)



125T/3200mm DA-41T



E300

Support x, y, R axis servo control, c axis hydraulic compensation / mechanical compensation mode; Built in machine control logic, hydraulic valve logic free configuration, I / O function port free configuration; Accurate angle programming calculation function; Standard USB interface;

Standard EDS / Pronet series servo;

Safety zone protection, collision detection, R-axis collision avoidance positioning function;

Built in parameter backup and one click recovery function;

Support one page programming;

Micro switch key board; Integrated suspension:

Can bus servo control technology;

High Definition LCD display, Chinese / English optional, male / English optional.



100T/4000 E300



CT8

8 "color LCD display, touch screen, icon recognition function;

The "EasyBend" page is processed with easy single bending.

The fully efficient bending programming can meet the needs of mass production and processing.

Automatically calculate bending angle, main pressure and deflection compensation; Automatic calculation of bending data; Automatic calculation of pressure and deflection compensation: automatic calculation of upper die depth: Angle, Back Gauge correction;



100T/4000 CT8



E300P

10 "high definition full color LCD touch screen is adopted X, y, R servo axis controlled by CAN bus;

Deflection compensation supports mechanical and hydraulic modes;

Built in machine action logic, multiple action modes; Built in mold library and material table can be edited;

USB interface is configured to facilitate backup and

Built in parameter backup / recovery function; Chinese/English, mm/inch.

I / O port can be configured freely;



125T/3200mm E300P

NC Controller

ESTUN: E21、E300/E300P Holland DELEM: DA41/DA41T、 Cybelec: CT8





DMB Series

CNC Hybrid-Electro Servo Press Brake

Performance

The system consumes less energy with the servo motor.

Oil distribution according to needs has no restriction loss to achieve the energy-saving indeed.

Low temperature-rise reduces the risk of oil leakage, which has better stability and can increase

the working life of hydraulic press system and oil cylinder.

Gear pump reduces working noise and sensitivity of oil cleanliness, low maintenance

Precision of ram position or manufacture isn't lower than proportional valve control system, even

higher. The ram repositioning precision is ±0.01mm,highest precision will be ±0.005mm.

The consumption of hydraulic oil reduces 70%.

The simpler installation method can improve efficiency.

Flexible installation meets populous needs.

Better economic and higher performance-to-price ratio.



SVP

DMB-SVP Series CNC Hybrid-Electro Servo Press Brake Servo Motor

- Using servo motor as the main power source of hydraulic pump can save about 40% energy
- The overall efficiency of the slider increases by about 7-20%
- Oil temperature can be reduced by about 10-20 °C



SVP Single Servo Main Motor CNC Press Brake

ESVP

DMB-ESVP Series CNC Hybrid-Electro Double Servo Press Brake

HOERBIGER ePrAX ® Control

- · High efficiency and energy saving, oil tank capacity reduced by 70%
- Fast-performance and duty cycle reduction 10%
- Compared with the traditional system, energy efficiency
- The positioning accuracy of precision-up to 5µm Integrated servo pump
- Lower-noise at work integrated pressure filters ensures high stability and long service life



ESVP Double Servo Pump Control CNC Press Brake

OPTIONAL CNC







CYBELEC CT12

ESA 5640





DMB Series

CNC Hydraulic-Electro Servo Press Brake

Performance

The fuselage adopts the welded structure of the split plate, which is tempered by the large tempering furnace equipment to eliminate the deformation caused by the welding stress and the processing stress to ensure the

Closed loop control mode composed of electric-hydraulic servo valve and measure ruler.

Ensure the highest control precision, bending accuracy and repositioning accuracy are also reach to the

Back gauge mechanism can be multi-axes controlled.

Integrated hydraulic system decreases the pipe connections, oil leakage, and increases the stability and

Worktable equipped with hydraulic and mechanical compensation to avoid the deformed upper beam from affecting the quality of the work piece, it is adjusted automatically by the CNC controller with convenient and

CNC controller normally uses Holland DELEM, Italy ESA, Swiss CYBELEC, all with multi-languages.



Standard Equipment

- Hydraulics by Germany BOSCH / HOERBIGER
- Servo drive and motors by Nanjing ESTUN
- Grating ruler by Spain FAGOA, Germany HEIDENHAIN
- Ball screw and linear guide by Taiwan HIWIN
- Main electrics by France SCHNEIDER
- Hydraulic compensation or mechanical compensation.

Manual adjustable front support with linear.









Germany BOSCH Hydraulics & Pump

U.S.A Sunny Oil Pump

Double Linear Guide







Optional Multiple Axes With More Function

Optional Equipment









Japan KYOKKO Fast Clamping

Boke Backgauge

WILA Hydraulic Clamps

Laser Guards

www.dishaagroup.com



Dishaa®

CNC Controller



DA53T

"Hot-key" touch navigation

10.1" high resolution colour TFT

Up to 4 axes (Y1,Y2 + 2 aux axes)

Crowning control

Tool / material / product library

Servo and frequency inverter control

Advanced Y-axis control algorithms for closed-loop as well as open-loop valves.

TandemLink (option)

USB memory stick interfacing

Profile-T offline software



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



DA58T

2D graphic touch screen programming mode
15 "high-resolution TFT true color display
Bending process calculation
The deflection compensation control
The servo and the inverter control mode
Advanced Y axis control algorithm, can control
closed loop valve, also can open loop control valve
The USB interface





DA66T

2D graphical touch screen programming mode 3D visualisation in simulation and production 17" high resolution colour TFT, Full Windows application suite Delem Modusys compatibility (module scalability and adaptivity)

USB, peripheral interfacing
User specific application support within the controllers

multitasking environment

Sensor bending & correction interface



CNC System Brand Description

DELEM: DA53T, DA58T, DA66T ESA: ESA S630, ESA S640 CYBELEC: CT12, MODEVA12S



CybTouch12

12 "color LCD display, touch screen, icon recognition function;

Automatically calculate bending angle, main pressure and deflection compensation; Automatic calculation of bending data; Automatic calculation of pressure and

deflection compensation; Automatic calculation of upper die depth; Angle, rear gear correction, 2D graphics

Automatically simulate the bending sequence (option).



160T/3200 CybTouch12

> ス に



ESA-S630

High-definition 10-inch TFT color touch screen Built-in PLC 2D graphics programming Expand length calculation

Graphic upper and lower mold, support the multilateral mold, telescopic mold, arc mold, gooseneck mold and so on Graphical programming Automatic, manual

Supports analog bending

Support for graphic or numerical arc bending support double-click linkage function, no need to purchase another synchronization card





ESA-S640

optimization

High definition 15 inch TFT color display

Built-in PLC, 2D graphics programming, Calculation of expansion length

Graphic up and down mold, support multilateral mold, telescopic mold, arc mold, gooseneck mold, etc Automatic and manual optimization of graphic programming

automatic and manual optimization of graphic programming

Support simulated bending, Support graphic or numerical arc bending PS2 keyboard and mouse interface

Support dual linkage function, no need to buy synchronous card









DMS Series CNC/NC Hydraulic Guillotine Shearing Machine



Model	Cutting Thickness	Cutting Length	Angle Range	Backgauge Stroke	Approx. Weight	Overall Length	Overall Width	Overall Height	Main Power
TYPE	(mm)	(mm)	(°)	(mm)	(T)	(mm)	(mm)	(mm)	(Kw)
6x2500	6	2500	1-3	750	4.2	3140	1740	2040	7.5
6x3200	6	3200	1-3	750	5.7	3750	1770	2150	7.5
6x4000	6	4000	1-3	750	8.5	4830	1840	2150	11
6x5000	6	5000	1-3	750	11	5830	1840	2150	11
6x6000	6	6000	1-3	750	14	6480	2100	2300	11
8x2500	8	2500	1-3	750	4.4	3040	1700	1700	-11
8x3200	8	3200	1-3	750	6	3860	1700	1700	11
8x4000	8	4000	1-3	750	8.9	4640	1700	1700	11
8x5000	8	5000	1-3	750	11.5	5400	2400	2000	11
8x6000	8	6000	1-3	750	16	6480	2100	2350	11
8x8000	8	8000	1-3	750	29.5	8580	2130	2350	11
10x2500	10	2500	1-3	750	6.5	3040	1800	1700	15
10x3200	10	3200	1-3	750	8	3850	1830	1900	15
10x4000	10	4000	1-3	750	12	4650	2100	2000	15
10x5000	10	5000	1-3	750	16	5750	2100	2000	15
10x6000	10	6000	1-3	750	24	6500	2100	2300	15
10x8000	10	8000	1-3	750	32	6800	2100	2300	15
13x2500	12	2500	1-3	750	8.5	3285	1830	2390	15
13x3200	12	3200	1-3	750	10	3855	1830	2390	18.5
13x4000	12	4000	1-3	1000	13.5	4850	1830	2390	18.5
13x6000	12	6000	1-3	1000	26	6850	1930	2650	18.5
13x8000	12	8000	1-3	1000	46	8950	2130	2850	18.5
13x9000	12	9000	1-3	1000	65	9980	2300	2950	18.5
13x10000	12	10000	1-3	1000	85	11050	2500	3100	18.5
16x2500	16	2500	1-3	1000	13	3440	1940	2830	22
16x3200	16	3200	1-3	1000	15	4010	1940	2830	22
16x4000	16	4000	1-3	1000	16.5	5010	1980	2830	22
16x5000	16	5000	1-3.5	1000	25	5900	2600	2830	22
16x6000	16	6000	1-3.5	1000	31	6900	2700	2830	22
16x8000	16	8000	1-3.5	1000	75	8900	2900	3430	22
20x2500	20	2500	1-3.5	1000	17	3440	1980	2830	30
20x3200	20	3200	1-3.5	1000	20	4010	1900	2830	30
20x4000	20	4000	1-3.5	1000	22	4850	2600	2900	30
20x6000	20	6000	1-3.5	1000	50	6700	3000	3000	30
30x2500	30	2500	1-3.5	1000	29	3440	1900	2830	37
30x3200	30	3200	1-3.5	1000	38	4200	1900	3000	37
40x2500	40	2500	1-3.5	1000	38	3440	2000	3000	37

Parameters change without notice. All the sizes above models are suitable for tandem.

Standard Equipment







German BOSCH Hydraulics





Electric Adjustment of Blade Clearance



Adjust Blade Clearance With Upper Fulcrum

Servo Motor

Optional Equipment







Precision Front Feeding

Belt Conveyor

Pneumatic Backgauge Support (ball bearing slide plate)

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

GUILLOTINE SHEARING





Parameters of CNC Press Brake





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Model (DMB)	63t/2500	100t/3200	125T/3200	160T/3200	200T/3200	250t/3200	300T/3200	400T/4000	500T/6000	600T/6000	800T/6000	800T/8000	1000T/6000	1000T/8000	1000T/1000
Norminal Force (KN)	630	1000	1250	1600	2000	2500	3000	4000	5000	6000	8000	8000	10000	10000	10000
Bending Length (mm)	2500	3200	3200	3200	3200	3200	3200	4000	5000	6000	6000	8000	6000	8000	10000
Vertical Distance (mm)	2000	2700	2700	2700	2700	2700	2700	3100	4900	4900	4200	6200	4200	6200	8200
Throat Depth (mm)	400	400	400	400	400	400	400	400	500	500	600	600	600	600	600
Stroke (mm)	150	200	200	200	200	200	300	300	300	300	400	400	400	400	400
Max. Opening(mm)	380	420	420	420	420	420	500	600	600	600	800	800	800	800	800
Main Power (KW)	5.5	7.5	11	11	15	15	22	30	37	45	55	55	2X37	2X37	2X37
Axes			3+1(Y1, Y2, X, V)												
Compensation		(Hy	/draulic C	compensa	ition)						(Motorize	d Compe	nsation)		
X-travel (mm)			5	600								800			
X-speed							200	mm/s							
Overall Length (mm)	3100	3500	3500	3500	3500	3500	3500	4500	6500	6500	6500	8500	6500	8500	10500
Overall Width (mm)	1450	1580	1580	1650	1680	1700	1800	2450	2810	2910	2950	2950	3000	3000	3000
Overall Height (mm)	2300	2500	2500	2600	2700	2760	2900	3500	4500	5100	5300	5900	5600	6100	5850
Apporx. Weight (Ton)	5.8	8.5	9.5	11	14	15.5	16.8	31	53	68	90	120	100	130	150



Technical Parameters

Model (DMB)	1200T/6000	1200T/7000	1600T/6000	1600T/7000	1600T/8000	1600T/10000	2000T/8000	2000T/10000	2000T/12000	2000T/14000	3000T/8000	3000T/10000	3000T/12000	3000T/1400
Norminal Force (KN)	12000	12000	16000	16000	16000	16000	20000	20000	20000	20000	30000	30000	30000	30000
Bending Length (mm)	6000	7000	6000	7000	8000	10000	8000	10000	12000	14000	8000	10000	12000	14000
Vertical Distance (mm)	4200	5200	4200	5200	6200	8200	5050	7050	9050	11050	6200	8000	9050	11000
Throat Depth (mm)	700	700	700	700	700	700	700	700	700	700	700	700	700	700
Stroke (mm)	400	400	400	400	400	400	500	500	500	500	400	400	400	400
Max. Opening(mm)	800	800	800	800	800	800	900	900	900	900	800	800	800	800
Main Power (KW)	2X45	2X45	2X55	2X55	2X55	2X55	2X75	2X75	2X75	2X75	2X55	2X55	2X55	2X55
Axes							3+1(Y1, Y2	2, X, V)						
Compensation						(Moto	orized Con	npensation)					
X-travel (mm)							1000)						
X-speed							200mn	n/s						
Overall Length (mm)	6500	8500	6500	7200	8500	10500	8500	10500	12500	14500	8500	10500	12500	14500
Overall Width (mm)	3100	3100	3300	3300	3300	3300	3500	3500	3500	3500	3700	3700	3700	3700
Overall Height (mm)	5850	7150	6500	7000	8000	8000	8000	8300	8300	8300	8600	8600	8600	8600
Apporx. Weight (Ton)	130	150	150	170	190	210	260	290	320	350	1	1	1	1

Parameters change without notice. All the above models are suitable for tandem.

CNC PRESS BRAKE





CNC/NC Hydraulic Guillotine Shearing Machine

Controller



E21S

- · LCD high-definition display.
- · Control backline shaft (X).
- Automatic fast movement and low speed positioning.
- · Independent manual movement function in X-axis.
- · Cut counting function.
- · Set the scale factor freely.
- Multi-step programming, program automatic running,
 High-quality, tactile keys. continuous positioning.
- Power off memory stoppers and stops of positions, programs, parameters.
- · Automatic back-off function to avoid interference between backliner and workpiece.

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- · Unidirectional positioning function eliminates screw drive clearance.
- · Metric/imperial conversion function. · Hardware diagnostic functions.


DAC360T

- Panel mounting
- · Bright LCD display
- · Rear/front stopper control
- · Back-off function
- · Shear angle and gap control
- · Cut stroke limit
- · All axes can be moved manually
- Pressure control
- Plate thickness detection
- Return to feeding position function · Second and third servo axis control
- · Sheet metal support function

Bright LCD screen, Backgauge control, Retract function, Cutting angle control, Cutting gap control, Stroke length limitation, Force control, Manual movement of axes;

Optional Controllers:

ESTUN E21S、E200PS、DAC360T、DAC362T、CT8G

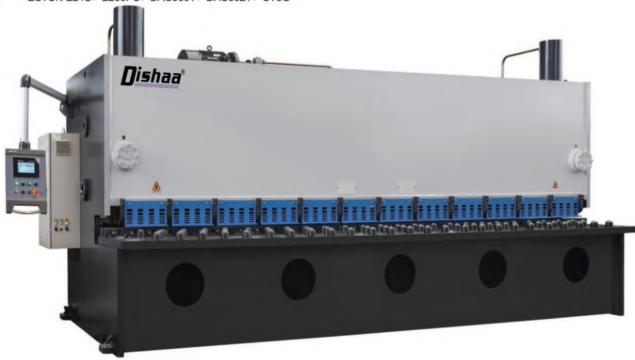

NC Hydraulic Swing Beam Shearing Machine

(E21S)

The UG (finite element) analysis method was used to optimize the design with computer aid. The fuselage adopts integral steel plate welded structure, which has good strength, rigidity and

vibration resistance.

Internal stress relief by tempering.

The whole frame is sanded to remove rust and sprayed with anti-rust paint.

The table is equipped with an auxiliary tool holder for easy blade adjustment.

The work surface is equipped with feeding balls, which is light to operate.


The blade gap adjustment adopts stepless adjustment mechanism to adapt to the shearing needs of different plate thicknesses and materials.

Rectangular lower blade with four cutting edges for extended blade life

Adjust the shear stroke to improve processing efficiency and realize segmented shearing function.

The number of cuts is automatically counted, which reduces the inventory work of cumbersome locks.



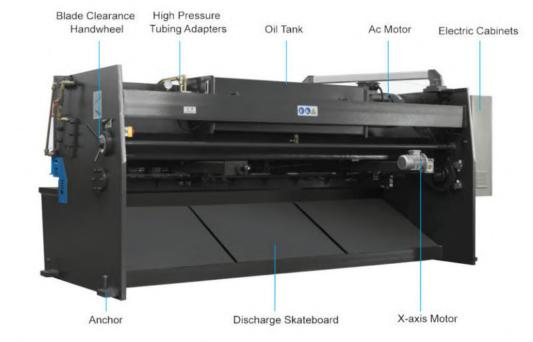

SWING

Q

EAM SHEARING

Thickness

(Mm)

Model

4×2500

Width

2500

Cutting

Angle

(°)

1°30'

Material

Strength

(Kn/cm)

≤450

Backgear

Travel

(Mm)

20-600

Dishaa®

Dishaa®

Overall Dimension

L×w×h(Mm)

3100×1700×1650

Weight

(T)

3.4

Power

(Kw)

5.5

Controller



E21S

- LCD high-definition display.
- · Control backline shaft (X).
- · Automatic fast movement and low speed positioning.
- · Independent manual movement function in X-axis.
- · Cut counting function.
- · Set the scale factor freely.
- · Multi-step programming, program automatic running, continuous positioning.
- · Power off memory stoppers and stops of positions,

programs, parameters.

- · Automatic back-off function to avoid interference between backliner and workpiece.
- · Unidirectional positioning function eliminates screw drive clearance.
- · Metric/imperial conversion function.

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- Hardware diagnostic functions.
- · High-quality, tactile keys.

DAC360T



- · Panel mounting
- · Bright LCD display
- · Rear/front stopper control
- · Back-off function
- · Shear angle and gap control Cut stroke limit
- · All axes can be moved manually Pressure control
- · Plate thickness detection
- · Return to feeding position function
- · Second and third servo axis control
- · Sheet metal support function

Delem Integrated touchscreen

The bright LCD display and easy-to-operate touch screen make it very convenient for users to operate. The operator relies on clear icons to easily complete all functions of data programming.

The DAC-362T supports two and three stopper shaft controls, providing control of additional stoppers and related functions. All pressures of clamping and shearing can be effectively controlled on the DAC-360T.



Brand Main Motor And Oil Pump





Rexroth Hydraulic Valves



Blade Clearance Adjustment Handwheel

Position The Ruler

In Front Of The Workbench







Backgauge Servo Motor



X-axis Drive Motor

Ball Screws And Linear Guides

4×2500	4	2500	1-30	≥450	20-600	10	5.5	3.4	3100×1700×1050
4×3200	4	3200	1°30′	≤450	20-600	14	5.5	4	3800×1700×1650
4×4000	4	4000	1°30′	≤450	20-600	10	5.5	5.6	4600×1750×1750
6×2500	6	2500	1°30′	≤450	20-600	14	7.5	4.4	3100×1750×1700
6×3200	6	3200	1°30′	≤450	20-600	12	7.5	5.1	3800×1750×1700
6×4000	6	4000	1°30′	≤450	20-600	8	7.5	7.6	4600×1850×1850
6×5000	6	5000	1°30′	≤450	20-600	6	11	12.5	5600×2050×2180
6×6000	6	6000	1°30′	≤450	20-600	5	11	14.8	6600×2120×2230
8×2500	8	2500	1°30′	≤450	20-600	10	11	5.3	3100×1750×1700
8×3200	8	3200	1°30′	≤450	20-600	8	11	6.5	3800×1750×1700
8×4000	8	4000	1°30′	≤450	20-600	8	11	7.7	4600×1850×1850
8×5000	8	5000	1°30′	≤450	20-600	8	11	13.5	5600×2100×2230
8×6000	8	6000	1°30′	≤450	20-600	8	11	15.8	6600×2200×2300
10×2500	10	2500	2°	≤450	20-600	9	11	6.5	3100×2820×1920
10×3200	10	3200	2°	≤450	20-600	9	11	7.7	3800×1820×1920
10×4000	10	4000	2°	≤450	20-600	8	11	9	4600×1900×2000
10×6000	10	6000	2°	≤450	20-750	5	15	22	6600×2400×2350
12×2500	12	2500	2°	≤450	20-600	9	18.5	8	3100×1850×2020
12×3200	12	3200	2°	≤450	20-600	9	18.5	9.4	3800×1820×1920
12×4000	12	4000	2°	≤450	20-600	8	18.5	11.8	4600×1950×2100
12×5000	12	5000	2°	≤450	20-750	6	18.5	21	5600×2400×2350
12×6000	12	6000	2°	≤450	20-750	5	18.5	26	6600×2400×2350
16×2500	16	2500	2°30′	≤450	20-600	9	22	9.2	3100×1950×2080
16×3200	16	3200	2°30′	≤450	20-600	8	22	10.6	3800×1950×2080
16×4000	16	4000	2°30′	≤450	20-600	8	22	15.3	4600×2300×2180

Cutting

Times

(T/min)

16



SWING

W

EAM SHEARING





DMD Series

Double-Drive High Speed Fiber Laser Cutting Machine



Performance

DMD series fiber laser cutting machine has many unique advantages in laser cutting applications. Excellent beam quality, suitable for high-speed and high-precision cutting. Small size, higher integration. The laser output power is stable and the equipment reliability is high. High efficiency, low energy consumption and low cost. Good dynamic characteristics and high efficiency.

Sample Display









Tubesheet Welded

- The bed adopts tube plate combined with welding structure (Internal aircraft metal honeycomb structure, mortise and tenon structure welding)
- It has higher rigidity, torsion resistance and deformation resistance
- The unique structure design has the ability to resist the deformation caused by high cutting heat
- Stress relief annealing after welding to ensure no deformation of the bed after 20 years of use





Model

Cutting Range

Laser Power

Max. Positioning Acceleration

Positioning Accuracy

Reposition Accuracy







DMD-3015

3000*1500mm

< 3000W

10m/s²

±0.02mm/m

±0.03mm













DMD-4015

4000*1500mm

< 3000W

10m/s²

±0.02mm/m

±0.03mm

DMD-4020

4000*2000mm

< 6000W

10m/s²

±0.02mm/m

+0.03mm

DMD-6020	DMD-6025	DMD-8025
6000*2000mm	6000*2500mm	8000*2500mm
< 12000W	< 12000W	< 12000W
10m/s ²	10m/s ²	10m/s ²
±0.02mm/m	±0.02mm/m	±0.02mm/m

±0.03mm

*The displayed parameters are for reference only, the actual parameter information is subject to the actual product

±0.03mm

www.dishaagroup.com

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

+0.03mm

ASER


FIBER LASER CUTTING

24

Dishaa®

DMP Series


Exchange Worktable Fiber Laser Cutting Machine

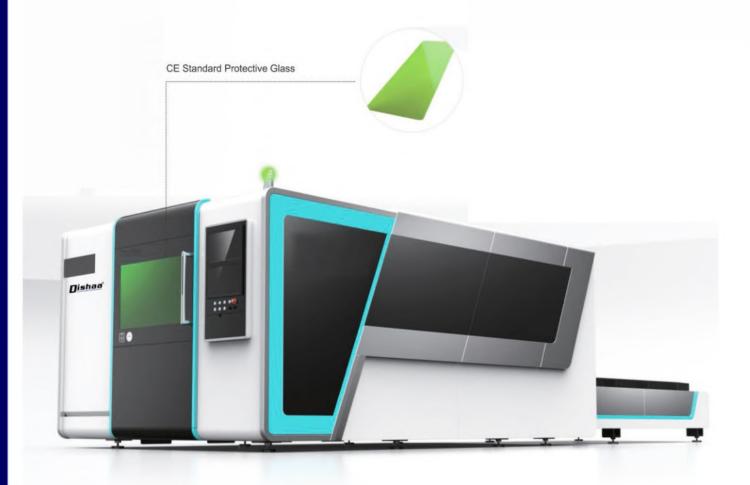

Performance

The new closed design, double table fast exchange, while processing edge cutting, fast, small slit, smooth section, easy operation, low energy consumption, suitable for large quantities of continuous processing, highlighting cutting competitive advantage.

Sample Display









Brand Laser Head

- Without manual focusing, the software can automatically adjust the focus lens and control the height of the upper and lower parts, so as to realize the automatic piercing and cutting of plates with different thickness. The software can memorize the focal length of different plates, and the operation is simpler, which is ten times of the manual speed.
- The precision is 0.01mm, which is suitable for different types of plates
- Double water cooling of collimating lens and focusing lens reduces the temperature of cutting head and improves the service life of cutting head.
























Maria Santa		The same trade of			
Model	DMP-3015	DMP-4020	DMP-6020	DMP-6025	DMP-8025
Cutting Range	3000*1500mm	4000*2000mm	6000*2000mm	6000*2500mm	8000*2500mm
Laser Power	< 20000W	< 20000W	< 20000W	3000-20000W	3000-20000W
Max. Positioning Acceleration	20m/s ²				
Positioning Accuracy	± 0.02mm/m				
Reposition Accuracy	±0.03mm	± 0.03mm	± 0.03mm	± 0.03mm	± 0.03mm

*The displayed parameters are for reference only, the actual parameter information is subject to the actual product





DMDR Series

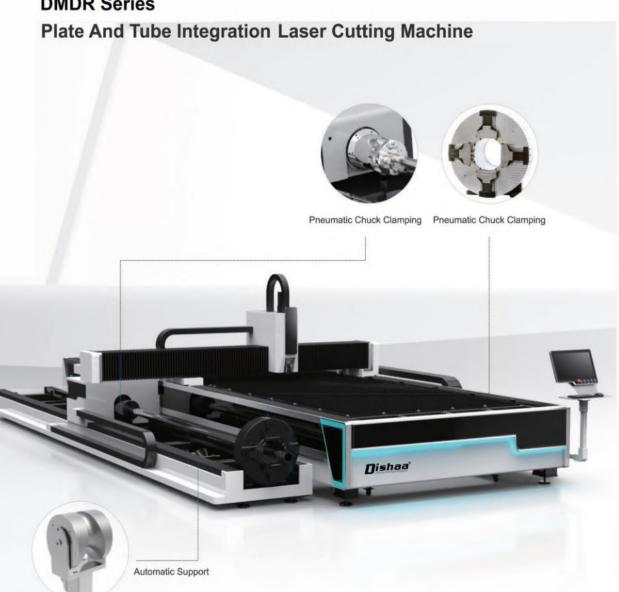

Performance

Tube sheet integrated cutting, easy to exchange, can not only cut flat plate, but also meet the needs of users to cut round tube, square tube and forming box.

- •It can cut multiple intersecting line holes with different directions and diameters on the main pipe
- •It can cut the oblique section end face at the end of the pipe
- •It can cut the intersection line end of branch pipe intersecting with annular main pipe
- •It can cut square hole, waist hole and round hole on round pipe

The steel pipe can be cut off

- •It can cut various graphics on the surface of square pipe
- •It can cut steel plates of different specifications
- •It can cut and cut holes on the forming box

Sample Display









Brand Laser

Fiber laser adopts air-cooled compact structure design, semiconductor fiber as laser generation medium, green environmental protection, simple mechanical structure, constant optical path, basically maintenance free, stable cutting performance.























Model	DMDR-3015	DMDR-4020	DMDR-6020	DMDR-6020
Cutting Range	3000*1500mm	4000*2000mm	6000*2000mm	6000*2500mm
Pipe Cutting Length	6000mm	6000mm	6000mm	6000mm
Chuck Diameter	220/320mm	220/320mm	220/320mm	220/320mm
Laser Power	< 6000W	< 6000W	< 6000W	< 6000W
Max. Positioning Acceleration	10m/s ²	10m/s ²	10m/s ²	10m/s ²
Positioning Accuracy	± 0.02mm/m	± 0.02mm/m	± 0.02mm/m	± 0.02mm/m
Reposition Accuracy	± 0.03mm	± 0.03mm	± 0.03mm	± 0.03mm

*The displayed parameters are for reference only, the actual parameter information is subject to the actual product

LASER CUTTING WITH TUBE CUTTING

28

DMPR Series



Professional Laser Cutting Control System

It adopts "CypCut plane cutting software", which is a set of software specially developed for the laser cutting industry. It is easy to use and has rich functions, which is suitable for various processing occasions. It can quickly set lead, micro-connection, compensation and other processes. With the batch modification function, it can quickly complete the setting of the whole board process. It supports floating coordinate system and workpiece coordinate system, supports photoelectric edge finding and capacitive edge finding, and quickly corrects the board. deviation angle.



Technical Parameters

Project	Unit	DMPR-3015	DMPR-4020	DMPR-6020	DMPR-6025	DMPR-8025
Sheet Cutting Range	mm	3000*1500	4000*2000	6000*2000	6000*2500	8000*2500
Laser Power	w	≤10000W	≤30000W	≤30000W	≤30000W	≤30000W
Tube Length	mm	6000~12000	6000~12000	6000~12000	6000~12000	6000~12000
Cut Pipe Diameter	mm	200~360	200~360	200~360	200~360	200~360
Acceleration	m/s²	20	20	20	20	20
Positioning Accuracy	mm/m	±0.02	±0.02	±0.02	±0.02	±0.02
Repeatability	mm	±0.03	±0.03	±0.03	±0.03	±0.03

*The displayed parameters are for reference only, the actual parameter information is subject to the actual product

Laser Cutting System Shared By Plate and Tube



Laser Cutting Head



smooth and efficient airflow design, Significantly improve cutting quality and efficiency;

intervention, focusing accuracy of 0.05mm;

Collimation adds protective lenses to effectively protect the collimating lenses;

protective lenses;






Tube Clamping Rotary Chuck



Chuck

- 1 Automatic centering of the chuck, automatic clamping, no need to replace the jaws for the full stroke
- 2 The moment of inertia of the chuck is small, and the positioning accuracy is high
- 3 The chuck has high precision for repeated card loading





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



Variable Diameter Support System

The system is equipped with multiple lifting support mechanisms with rotatable pipe diameters. And realize the function of automatic lifting and changing diameter

Equipment Main Configuration List

No.	Project	Configure Content Or Description	Place of Origin
		Rack And Pinion	Taiwan YYC
1	Machine Tool System:	Reducer	French Motoreducer
	Gantry Double Drive Structure	Beam Structure	DISHAA
		Motor System	Fuji, Japan
		Guide	Taiwan HIWIN/Japan SMG
2	Laser Generator	Maxphotonics Fiber Laser	China
3	Cooling System	Laser Supporting Water Cooling System	China
4	Cutting Head System	Raytools	China Raytools
5	Workbench Form	Fixed Workbench	DISHAA
6	Sheet Metal Form	Half-enclosed Sheet Metal Housing	DISHAA
7	Control System	BoChu	ShangHai
8	Exhaust System	Large Flow Fan	China
9	Gas Distribution System	Throttle Valve, Pressure Reducing Valve, Electric Proportional Valve	Japan, etc.
10	Computer	Dual-core Cpu 2.6ghz + Memory 1g + Hard Disk 250g + 19-inch Screen	Industrial Computer
11	The Composition Of The	Optical Fiber Cutting Head Lens	Optical fiber dedicated
.,	Cutting Head System	Capacitive Sensor + Amplifier (Built-in) + Adjustment Box	China
		Contactors, Air Switches, Etc.	Schneider
12	Electrical System	Photoelectric Switch, Etc.	Omron
	Composition	Terminal	Weidmüller, Germany
		Tanks Chain	China
13	Appendix	Protective Lens + Single And Double Layer Nozzle +	DISHAA
		Ceramic Ring + Nozzle Connecting Line	2.5

ASER CUTTING WITH TUBE CUTTING

32





CO2 Laser Marking Machine with RF Metal Tube



Applicable Fields

Popular for non-metal materials marking, widely used in leather, wood, textile, plastic, signage, packaging, crafts, electronics, communications devices, watches, glasses, printing, decoration areas, etc.

Equipment Advantages

- 1. It adopts imported or high-quality domestic CO2 RF laser source, which has better beam quality, high photoelectric conversion rate and good performance.
- 2. High engraving precision, clear marking machine, not easy to wear, fast marking speed, stable performance, no consumables for equipment.
- 3. Long working life, stable laser output, suitable for industrial long term continuous work, and can be refilled with gas continuing to use.
- 4. Support PLT, PCX, DXF, BMP and other documents, directly use SHX, TTF fonts, support automatic coding, serial number, batch number, date, barcode and QR code marking, software has graphic anti-play function.

Technical Parameters

Model	DX-30S	DX-60S	DX-100S
Laser power	30W	60W	100W
Laser wavelength	10.64um	10.64um	10.64um
Repeat frequency	≤20KHz	≤20KHz	≤20KHz
Marking speed	≤7000mm/s	<7000mm/s	≤7000mm/s
Minimum font	+/-0.4mm	+/-0.4mm	+/-0.4mm
Repeat positioning accuracy	±0.01mm	±0.01mm	±0.01mm
Control system	Interal air cooling or outer water cooling	Interal air cooling or outer water cooling	Interal air cooling or outer water cooling
Power supply	AC 110V/220V ± 10%,50HZ	AC 110V/220V ±10%,50HZ	AC 110V/220V ± 10%,50HZ
Whole power	1500W	1500W	1500W

Sample Display









COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

33





Large Format Dynamic CO2 Laser Marking Machine with RF Metal Tube






COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS







Equipment Advantages

- 1.Suitable for large-area engraving marking of various non-metallic materials; layered setting, perfect combination of surface engraving, hollowing and cutting.
- 2.It can be applied to the cutting of soft and low-density sheets. It has strong laser energy, fine beam and small mechanical stress.
- 3.Ideal for marking rolled fabrics, marking on jeans to get different marking effects and flying
- 4. Fully enclosed optical path, imported CO2 RF laser and strict multiple control design.

Applicable Fields

Ideal for marking rolled fabrics, marking on jeans to get different marking effects and flying

Technical Parameters

Model	DXF-1212/16110
Process area	1200*1200mm , 1600*1000mm
Laser power	100W-600W optional
Laser wavelength	10640nm
Laser type	RF sealed laser generator imported from US
Lens	Laser conductive lens full set imported from US i
Cooling system	Professional industrial forced water-cooling system
Marking speed	0-7000mm/s
Laser energy control	0-100% software setting
Minimum font	1.8mm
Minimum character space	0.4mm
Positioning accuracy	≤+0.01mm
Control software	Chanxan dynamic control system
Support format	Photoshop,coreldraw,autocad,plt,ai,bmp,dxf,shx,ttf
Auxiliary device	Exhaust fan and exhaust pipe
Power supply	AC 110V/220V ±10%,50HZ/60HZ
Working environment	Temperature:1-45℃, Humidity:5-95%
Optional configuration	Honeycomb table or auto feeding system

Sample Display









UV Laser Marking Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Applicable Fields

Dishaa®

Suitable for high-end market for ultra-fine processing such as mobile phones, chargers, data cables and pharmaceutical packages, cosmetics packages and polymer materials surface making. Also it can be used for marking of flexible PCB boards, dicing; microholes and blind holesfor silicon wafers, LCDQA code marking, glassware punching, metal surface marking, plastic buttons, electronic components, gifts, communication equipment, building materials marking, etc.

Equipment Advantages

- 1.The heat-affected zone is extremely small, avoiding deformation, damage or charring of the material to be processed and the yield is high.
- 2.Applied on various materials to make up shortcomings of fiber laser or CO2 laser marking.
- 3. High photoelectric conversion rate, 355nm output wavelength, beautiful engraving effect, good touch feeling, high anti-counterfeiting effect.
- 4. Products are widely used in micro-machining, fine engraving of various metal and non-metal film materials.

Technical Parameters

Model	DX-03Z/08Z/10Z
Process area	100*100mm
Laser power	3W/8W/10W optional
Laser wavelength	355nm
Laser type	808nm semiconductor pumping source
Lens	Laser lens imported from US
Cooling type	Professional industrial thermostat system
Marking speed	500 characters/sec
Laser energy control	0-100% software setting
Minimum font	0.1mm
Minimum mark line-width	0.01mm
Repeat positioning accuracy	± 0.001mm
Whole power	1.5KW
Power supply	AC 110V/220V ± 10%,50HZ/60HZ
Working environment	Temperature:1-45℃,Humidity:5-95%
Dimensions	900*1000*1600mm

Sample Display

















38



Large Format Laser Marking Machine



Applicable Fields

Dishaa®

It is applied to large format, large-size whole format marking, ruler scale, elevator, sanitary ware, billboard, etc.

Equipment Advantages

- 1.Good marking effect. The high-quality laser source guarantees high-quality beam quality, and the marking effect is very delicate.
- 2.Deep marking. It can meet the needs of deep marking, the deepest can reach 0.5mm (depending on the material) which can meet most of the needs.
- 3. High marking accuracy: splicing marking accuracy can reach ±0.005mm
- 4.Long service life. The fiber laser source can reach 100,000 hours, and the machine can be used for 3 to 5 years.
- 5.No consumables, no pollution, energy saving and environmental protection, compliance with European environmental protection standards.
- 6.No need to adjust the light path. The optical path system has been debugged before leaving the factory and it is a closed optical path structure without subsequent adjustments.
- 7.Low cost and low power consumption.

Technical Parameters

Model	DS-1325
Average output power	100W (Optional)
Marking line speed	≤7000mm/s
Marking size	1300*2500mm (Can be customized on demands)
Minimum character height	0.2mm
Marking repeatability	<24 µrad
Marking depth	0.3mm (Depends on the material)
Minimum line width	0.06mm (Depends on the material)
Power supply	AC 220V 50KHz
Motor	Stepper motor/servo motor (optional)
Positioning accuracy	0.05mm
Repeatability	±0.01 mm
Displacement speed	100~300mm/s

Sample Display













Fiber Laser Marking Machine



Applicable Fields

Popular in electronic components, hardware products, tool accessories, integrated circuits (IC), electrical appliances, mobile phone accesories, precision instruments, glasses and watches, jewelry, car parts, plastic buttons, PVC pipes, medical equipment and other industries for materials like common metals and alloys (iron, copper, aluminum, magnesium, zinc, etc), rare metals and alloys (gold, silver, titanium), metal oxides, special surface treatment (phosphating, aluminum anodizing, Electoplating surfaces, ABS materials, etc.

Equipment Advantages

- 1. It has a wide range of applications and can be used to engrave metallic materials and some non-metallic meaterials.
- 2. Marks do not fade due to environmental relationships (touch, acid and alkaline gases, high temparatures, low temparatures, etc.) and have high anti-counterfeiting properties.
- 3. Line widths can be as small as 10cm and depths up to 10cm, marking the surface of parts of the 'mm' size.
- 4. The marking effect is exquisite, the process is beautiful and the precision is high, which can improve the product grade and enhance the added value of the product.
- 5. No consumables, no pollution, energy saving and environmental protection in line with European environmental standards; easy to learn, no need for too much labor costs; high efficiency, long life and mainteinance-free preformance.

Technical Parameters

Model	DX-30G/50G/100G
Laser power	30W/50W/100W
Laser wavelength	1064nm
Repeat frequency	20-80KHz
Engraver speed	≤7000mm/s
Minimum font	+/-0.15mm
Repeat positioning accuracy	±0.002mm
Control system	Internal air cooling
Power supply	AC 110V/220V ±10%,50HZ
Whole power	500W

Sample Display









COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

BER LASER MARKING





Laser Cleaning Machine

Laser cleaning equipment is a new generation of high-tech products which can clean the surface of metal material.

Easy to install and operate.

Connect to the power, turn on the equipment, then can clean work pieces without chemical reagents, media, dust and water. The machine can focus automatically, and have the advantages of curved surface cleaning and high cleanliness. It can remove dirt, rust, on the surface of work pieces.

Advantages:

The machine can use same laser source with laser welding machine, change the laser cleaning gun easily and controller to reach cost performance and work performance result, user can buy the machine easily within budget





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



Laser cleaning machine is mainly used in aviation, ship, cultural relic protection, automobile peripheral, track, weapons, electronics industry, Precision hardware and other fields. Such as: metal surface rust removal; surface oil pollution, stain, dirt cleaning; surface coating, coating removal; welding surface / spray surface pretreatment;

Technical Parameters

Model	DLW- 1000C / 1500C / 2000C
Output optical power	1000W/1500W/2000W
Large pulse energy	100J
High peak power	9.9kw
Pulse width	0-15ms
Repetition frequency	50-50,000HZ
Spectroscopic methods	Precision energy splitting or high speed time splitting
Closed loop feedback control	Arbitrary waveform rea-time control power negative feedback
Energy fluctuation	<±3%
Aiming mode	Laser diode red light indication
Numbers of optical fiber paths	standard one light paths
Cooling way	Built-in water chiller
Power consumption of equipment	≤5kw
Power requirements	AC 220V+15%,50HZ/60HZ
	1360*660*1060mm

Comparison Cleaning





Before

After

CLEANING





Laser Welding Machine



Applicable Fields:-

It is widely used for welding all kinds of stainless steel mirror words, stainless steel brushed words, stainless steel spherical characters, stainless steel paint characters stainless steel spray words, stainless steel solid words, stainless steel plating word stainless steel gold foil words, precision stainless steel characters, titanium flat words, titanium spherical surface word, Seiko Titanium, Flat Copper, Spherical Copper, Copper Antique, Seiko Aluminum, Iron Paint (Stainless Steel, Iron, Low Carbon Steel), metal word welding.

Lighting and mould industry, optoelectronic communication devices, medical treatment, electronics, copper, aluminum and small welding processing industries.

Equipment Advantages:-

- 1. It is easy to operate, you can get on the job without special job permit, and you can weld beautiful products without skill of the master.
- 2. The welding speed is 2-10 times faster than the traditional welding. One machine can save at least 2 welders a year.
- 3. The weld seam is smooth, reducing the subsequent grinding process, saving time and cost.
- 4. Welding large metal advertising characters use hand-held welding heads to overcome the limitations of the work space.
- 5. The fixed welding head can rotate in all direction to overcome the inconvenience of the traditional welding head in one direction.
- 6. Suitable for all kinds of complex welds, spot welding of various devices.

Technical Parameters

Model	DW-1000/1500/2000
Laser wavelength	1064nm
Output optical power	1000W/1500W/2000W
Large pulse energy	100J
High peak power	9.9kw
Pulse width	0-15ms
Repetition frequency	0-150HZ
Spectroscopic methods	Precision energy splitting or high speed time splitting
Closed loop feedback control	Arbitrary waveform real-time control power negative feedback
Energy fluctuation	<±3%
Aiming mode	Laser diode red light indication (CCD option)
Number of optical fiber paths	(standard one light path)
Cooling way	Built- in water chiller
Power consumption of equipment	4KW
Power requirements	AC220V±15% 50/60HZ
Size of the host	1360x660x1060mm (length, width and height)

Sample Display









ASER WELDING





CNC cutting Machine

CNC Table Type Plasma Cutting Machine









COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Technical Specifications


Model	DMTC-1530		
Effective cutting area	1500*3000mm (4.9*9.8 ft)		
Cutting mode	Plasma oxy-fuel(Option)		
Plasma cutting thickness	Depends on plasma source		
Oxy-fuel cutting thickness	5mm-50mm (1/5-2 inch)		
Drive system	Dual drive, stepper motors/servo motors		
CNC system	Fangling CNC controller		
Torch height control Arc voltage auto THC and anti-collision for plasma			
Running speed regulation range	0—12000 mm/min		
Workable option	Water workable		

Spare Parts




Plasma Power Sourses

CNC Gantry Type Plasma Cutting Machine

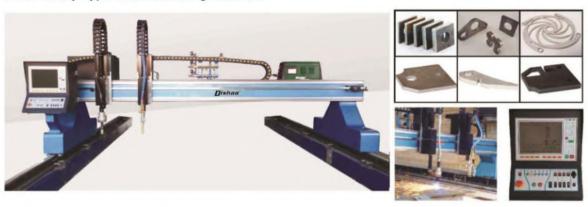

Technical Specifications

Model	DMSC-3000/4000
Track span	3000mm/4000mm
Effective cutting width	2300mm-3300 (7.5ft-10.8ft)
Effective cutting length	Standard 4500mm, can be extended per 2000mm
Cutting mode	Plasma, oxy-fuel or plasma+oxy-fuel
Torch height control	Arc voltage auto THC and anti-collision for plasma cutting

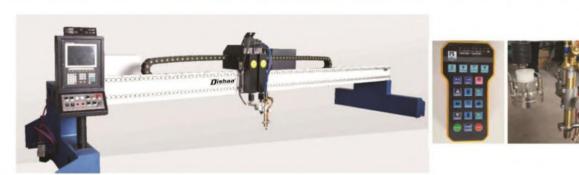

Technical Specifications

Model	DMGC-4000/5000/6000/8000		
Track span	4000/5000/6000/8000mm		
Working width	3300/4300/5300/7300mm (10.8ft/14.1ft/17.3ft/23.9ft)		
Working length	Depends on customer's requirement		
Cutting mode	Plasma, oxy-fuel or plasma+oxy-fuel		
Cutting thickness	2200mm (1/10—7inchs)		
Drive system	Duel drive, servo motors		
CNC system	Hyperthem/ Fangling CNC		
Torch height control	Arc voltage auto THC and anti-collision for plasma cutting		
Cutting speed	0-10000mm/min		
Optional functions	Capacitance auto THC for oxy-fuel cutting, auto ignition for oxy- fuel cutting, underwater plasma cutting, power marking, bevel cutting, laser position, chair, different color		

GANTRY CNC PLASMA CUTTING





CNC 4-Roller Plate Rolling Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Advantages

- 1. Hydraulic-driven, high efficiency(driving power equivalent 60% traditional;
- 2.Permanent lubrication technology(bearing life period without refueling);
- 3.Clamping pressure is adjustable(non-existent skidding, productivity is 50-80% than three roller plate rolling clamping);
- 4. Rolling diameter can catch 1.1 times of the top roller;
- 5.lt can meet many kinds of demands

Following users apply to use the machine:

- 1. Operators to lack of experience and require high efficiency:
- 2. Require high accuracy to improve products quality;
- 3. Only need one operator to reduce labor costs;
- 4. Require conveying device, feeding device and support device
- because of large size plate or high productivity or security;
- 5. Require CNC operation to reduce errors caused by human factors.





Technical Parameters

Specifications & models	Max.Pre-rolling thickness(mm)	Max.Rolling thickness(mm)	Diameter of upper roller(mm)	Plate width (mm)	Main motor power(kw)
DW12-3X1500	2	3	135	1500	2.2
DW12-5X1500	3	5	190	1500	4
DW12-10X2000	8	10	240	2000	11
DW12-10X2500	8	10	260	2500	15
DW12-12X2000	10	12	260	2000	15
DW12-15X2000	12	15	265	2000	18.5
DW12-15X2500	12	15	280	2500	22
DW12-20X2000	16	20	300	2000	30
DW12-20X2500	16	20	340	2500	30
DW12-25X2500	20	25	390	2500	30+7.5
DW12-25X3000	20	25	420	3000	37+7.5
DW12-30X2500	25	30	420	2500	37+7.5
DW12-30X3000	25	30	460	3000	45
DW12-35X2500	30	35	460	2500	45
DW12-35X3000	30	35	510	3000	55
DW12-35X3500	30	35	550	3500	55
DW12-40X2500	35	40	510	2500	55
DW12-40X3000	35	40	550	3000	55
DW12-40X3500	35	40	560	3500	55+7.5
DW12-50X2500	45	50	560	2500	55+7.5
DW12-50X3000	45	50	605	3000	55
DW12-50X3500	45	50	640	3500	75
DW12-60X3000	50	60	670	3000	75
DW12-60X3500	50	60	700	3500	75
DW12-70X3000	65	70	720	3000	90
DW12-70X3500	65	70	760	3500	90
DW12-80X3000	70	80	780	3000	90
DW12-80X3500	70	80	840	3500	55X2
DW12-80X4000	70	80	870	4000	55X2
DW12-90X3000	80	90	810	3000	75X2
DW12-90X3500	80	90	890	3500	75X2
DW12-90X4000	80	90	925	4000	75X2
DW12-100X3000	85	100	850	3000	45X4
DW12-100X3500	85	100	925	3500	45X4
DW12-100X4000	85	100	960	4000	45X4
DW12-120X3000	100	120	940	3000	55X4
DW12-120X3500	100	120	980	3500	55X4
DW12-120X4000	100	120	1020	4000	55X4
DW12-140X3000	115	140	1000	3000	75X4
DW12-160X3500	130	160	1220	3500	90X4
DW12-180X3000	150	180	1280	3500	55X8
DW12-200X4000	160	200	1500	4000	75X8

CNC 4-ROLLER PLATE ROLLING





Large Format Laser Marking Machine



Applicable Fields

It is applied to large format, large-size whole format marking, ruler scale, elevator, sanitary ware, billboard, etc.

Equipment Advantages

- 1.Good marking effect. The high-quality laser source guarantees high-quality beam quality, and the marking effect is very delicate.
- 2.Deep marking. It can meet the needs of deep marking, the deepest can reach 0.5mm (depending on the material) which can meet most of the needs.
- 3. High marking accuracy: splicing marking accuracy can reach ±0.005mm
- 4.Long service life. The fiber laser source can reach 100,000 hours, and the machine can be used for 3 to 5
- 5.No consumables, no pollution, energy saving and environmental protection, compliance with European environmental protection standards.
- 6.No need to adjust the light path. The optical path system has been debugged before leaving the factory and it is a closed optical path structure without subsequent adjustments.
- 7.Low cost and low power consumption.

Technical Parameters

Model	DS-1325
Average output power	100W (Optional)
Marking line speed	≤7000mm/s
Marking size	1300*2500mm (Can be customized on demands)
Minimum character height	0.2mm
Marking repeatability	<24 µrad
Marking depth	0.3mm (Depends on the material)
Minimum line width	0.06mm (Depends on the material)
Power supply	AC 220V 50KHz
Motor	Stepper motor/servo motor (optional)
Positioning accuracy	0.05mm
Repeatability	±0.01 mm
Displacement speed	100~300mm/s

Sample Display













HAND HELD LASER MARKING MACHINE







COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

TECHNICAL SPECIFICATIONS

Software	English system	
Cooling type	Air cooling	
Laser type	Fiber laser	
Laser power	20W,30W,50W	
Laser wavelength	1064nm	
Minimum font	0.15mm	
Repetition accuracy	0.002mm	
Working voltage	220V±10% 50/60H	
Machine net weight	20KG	
Machine gross weight	30KG	
Whole machine power	Less than 500W	
Marking area	300*300mm	

IMPLEMENTED QUALITY STANDARD

Serial number	Name
GB7247-87	Radiation Safety of Laser Products, Equipment Classification Needs and User
	Guidelines
GB10320-88	Electrical safety of laser equipment and facilities
ISO9000-3	International software standards
GB/T12123-89	sales packaging process
IEC 536	Classification of electric shock protection for electrical and electronic equipment

MAIN CONFIGURATION

SR No.	Subsystem name	Brand	Model	Qty.	Origin
1.	Laser	Wuhan Ruike	D20/30/50	1	PRC -Wuxi
2.	Galvanometer	Shenzhen Zhibotek	ZB2D10C1064	1	Shenzhen, PRC
3.	Field lens	Shenzhen Crystal Lattice	JGZL1-1064-160-110	1	Shenzhen, PRC
4.	Power supply	Taiwan MEAN WELL	S150-24W	1	Taiwan, PRC
5.	Software control system	Shenyang Baichuang	8 built-in control panel	1	PRC -Shenyang
5.	Battery (optional)	Piccolo	12000mA	1	PRC-Zhengzhou
7.	Filter	Taiwan YUNSANDA	CW2B-10A	1	Taiwan, PRC



Adding a synchronizer for flow marking in the pipe industry



Inside display of equipment packaging box



Additional equipment packaging box

TECHNICAL PARAMETER

Project	Product parameter table	CX-20GP	CX-30GP	CX-50GP				
	Machine material	Sandblasted anodizedall-aluminum construction						
	Laser	The service life of the fibe	r laser generator is more	than 100,000 hours				
	Laser wavelength	1064nm						
	Actual outputpower	≥20W	≥50W					
Overall machine	Marking speed	≤12000mm/s						
characteristics	Master control	8-inch touchcontroller						
	Cooling system	Normal temperatureair cooling						
	Minimum linewidth	0.0012mm						
	Repeatability	0.003mm						
	Marking range	75mm×75mm or 120×75mm (or customized)						
	Targeting	Red light indication						
	Number of lines of characters tobe engraved	Any row within the marking range						
	Productionline speed	0~130m/min (depending on the material)						
	multi-lingual	English, French, Spanish, German, Chinese, Russian, Arabic, etc.						
	Administrative permissions	Multi-user management permissions						
ntroduction	Operating system	Linux system						
	Coding mode	Three printing modes: static, simulation andencoder						
	Reserved signal	Start printing, printing status, printing completed, fault alarm						
	Data protection	With power-off data protection function						
	Missed dose monitoring	Provides over speed alarm function due to false triggering due to mater reflection						
	go to intersection	Automatically remove intersection points and avoid key points of intersection						
	Coding software	Can realize single and dou	ble machinecode sendin	g				
	font	Chinese, English, digital, tr						
Supporttype	file format	BMP/DXF/HPGL/JPEG/PLT						
	barcode	CODE39, CODE128, CODE126, QR, Zhenzhi code (optional)						
Maintenance	Power supply	Standard configuration: ex	kternal power supply 220	DV/50HZ				
parameters	Power consumption	200W		-				
	Machine net	Chassis: 7kg, machine hea	d: 1.25kg, total weight a	fter				
	weight	packaging: 8.25kg						
	Dimensions	Chassis: 312 * 237.8 * 185mm , machine head: 245 * 98.7 * 189 mm, packaging box: 51 0* 325 * 41mm						
	Battery life	Optional: Built-in battery: 12000mA, normal use time 12-16 hours						
Environment	Require	External temperature 0°C- vibration						





Laser Cleaning Machine

Laser cleaning equipment is a new generation of high-tech products which can clean the surface of metal material.

Easy to install and operate.

Connect to the power, turn on the equipment, then can clean work pieces without chemical reagents, media, dust and water. The machine can focus automatically, and have the advantages of curved surface cleaning and high cleanliness. It can remove dirt, rust, on the surface of work pieces.

Advantages:


The machine can use same laser source with laser welding machine, change the laser cleaning gun easily and controller to reach cost performance and work performance result, user can buy the machine easily within budget





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Technical Parameters

Model	DLW- 1000C / 1500C / 2000C
Output optical power	1000W/1500W/2000W
Large pulse energy	100J
High peak power	9.9kw
Pulse width	0-15ms
Repetition frequency	50-50,000HZ
Spectroscopic methods	Precision energy splitting or high speed time splitting
Closed loop feedback control	Arbitrary waveform rea-time control power negative feedback
Energy fluctuation	<±3%
Aiming mode	Laser diode red light indication
Numbers of optical fiber paths	standard one light paths
Cooling way	Built-in water chiller
Power consumption of equipment	≤5kw
Power requirements	AC 220V+15%,50HZ/60HZ
Size of host	1360*660*1060mm

Comparison Cleaning





Before

After





Laser Welding Machine



Applicable Fields:-

It is widely used for welding all kinds of stainless steel mirror words, stainless steel brushed words, stainless steel spherical characters, stainless steel paint characters stainless steel spray words, stainless steel solid words, stainless steel plating word stainless steel gold foil words, precision stainless steel characters, titanium flat words, titanium spherical surface word, Seiko Titanium, Flat Copper, Spherical Copper, Copper, Copper Antique, Seiko Aluminum, Iron Paint (Stainless Steel, Iron, Low Carbon Steel), metal word welding.

Lighting and mould industry, optoelectronic communication devices, medical treatment, electronics, copper, aluminum and small welding processing industries.

Equipment Advantages:-

- 1. It is easy to operate, you can get on the job without special job permit, and you can weld beautiful products without skill of the master.
- 2. The welding speed is 2-10 times faster than the traditional welding. One machine can save at least 2 welders a year.
- 3. The weld seam is smooth, reducing the subsequent grinding process, saving time and cost.
- 4. Welding large metal advertising characters use hand-held welding heads to overcome the limitations of the work space.
- 5. The fixed welding head can rotate in all direction to overcome the inconvenience of the traditional welding head in one direction.
- 6. Suitable for all kinds of complex welds, spot welding of various devices.

Technical Parameters

Model	DW-1000/1500/2000
Laser wavelength	1064nm
Output optical power	1000W/1500W/2000W
Large pulse energy	100J
High peak power	9.9kw
Pulse width	0-15ms
Repetition frequency	0-150HZ
Spectroscopic methods	Precision energy splitting or high speed time splitting
Closed loop feedback control	Arbitrary waveform real-time control power negative feedback
Energy fluctuation	<±3%
Aiming mode	Laser diode red light indication (CCD option)
Number of optical fiber paths	(standard one light path)
Cooling way	Built- in water chiller
Power consumption of equipment	4KW
Power requirements	AC220V±15% 50/60HZ
Size of the host	1360x660x1060mm (length, width and height)

Sample Display













DNG-057

An additional cold dryer and aircompressor are required to enable the nitrogen generator to produce nitrogen.

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Nitrogen purity: 99.999% Input Pressure: 8 Bar Output Pressure: 7 Bar

Power:15W (Power is the cost per hour to produce nitrogen)

2m³/h, Can connect 2 laser handheldwelders at the same time 1m³/h, Can connect 1 laser handheldwelders at the same time



DNG-059

No need to configure a cold dryerand air compressor. Nitrogen gas is

generated directly when the machine is turned on-

Nitrogen purity: 99.999% Input pressure: 8 Bar Output pressure: 7 Bar

Power: 3600W (Power is the cost per hour to produce nitrogen)

2m³/h, Can connect 2 laser handheldwelders at the same time 1m³/h, Can connect 1 laser handheldwelders at the same time



NITROGEN





DNG-058

An additional aircompressor are required to enable the nitrogen generator to produce nitrogen.

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Nitrogen purity: 99.999% Input pressure: 8Bar Output pressure: 7Bar

Power: 75W (Power is the cost per hour to produce nitrogen) 2m³/h, Can connect 2 laser handheldwelders at the same time 1m³/h, Can connect 1 laserhandheldwelders at the same time





DNG-060

No need to configure a cold dryer and air compressor. Nitogen gas is generated directly when the machine is t urned on.

Nitrogen purity: 99.999% Input pressure: 8Bar Output pressure: 7Bar

Power: 3600W (Power is the cost per hour to produce nitrogen) 2m³/h, Can connect 2 laser handheldwelders at the same time 1m³/h, Can connect 1 laserhandheldwelders at the same time



NITROGEN





About 3 IN 1 NITROGEN GENERATOR

• No need to purchase additional cold dryersor air compressors. Compared with other nitrogen generators: Higher stability, small size, no installation required, just press the start switch, easy to operate



• Low power consumption, product costs are lower.

Special nitrogen generator for laser welding:

- The nitrogen works for 10 hours and is provided for two laser welders.
- The nitrogen purity of the nitrogen generator is 99.99% which is higher than ordinary nitrogen bottles.
- No manual replacement is required, which costs manual time.

Nitrogen Machine Welding Effect Display





Galvanized Shoot



Aluminum Alloy

Technical Parameters

Stainless Steel

Otaliliess ofeel	Gaivai	HECC OFFICEL	Aldinii	Turri Arioy	
Specification	2m³	2m³	2m³	3m³	4m³
Model	DNG-059 / DNG-060	DNG-058	DNG-057	DNG-061	DNG-062
Nitrogen Production	2m³/h	2m3/h	2m³/h	3m³/h	4m³/h
Nitrogen purity/%	99.99/99.999	99.99/99.999	99.99/99.999	99.99/99.999	99.99/99.999

Nitrogen Nitrogen Power Supply 220V/50Hz 220V/50Hz 220V/50Hz 220V/50Hz 220V/50Hz 3.6KW 15W

riatomatic ottart rina otop		Du	iden a comigaration		
Configuration	No need for cold dryer or air compressor	need air compressor	need for cold dryer and air compressor	need for cold dryer and air compressor	need for cold dryer and air compressor
Appearance Size	111*63*112	111*63*112	52x43x100	60*56*100	72*60*100
Weight	228KG	168KG	62KG	71KG	86KG
Air Intake Pressure	≥0.65≤0.8Mpa	≥0.65≤0.8Mpa	≥0.65≤0.8Mpa	≥0.65≤0.8Mpa	≥0.65≤0.8Mpa
Nitrogen Production Pressure	≥0.55≤0.7Mpa	≥0.55≤0.7Mpa	≥0.55≤0.7Mpa	≥0.55≤0.7Mpa	≥0.55≤0.7Mpa
Recommendations For Adapting Welding Machines	2 laser handheld welding	2 laser handheld welding	2 laser handheld welding	3 laser handheld welding	4 laser handheld welding
	A STATE OF THE PARTY OF THE PAR	of the contract of the second second	and the second s	The second of the second of the second	

Compared to other models. Advantages of SG-Z059: No installation required, simple operation, no need to equip air compressor and cold

The disadvantage of SG-Z059 is that it has wearing parts. Motor parts need to be replaced every 2-3 months. The wearing parts of other models should be replaced once a year. If the customer's factory has an air compressor, it is more suitable to buy SG-Z058

Special nitrogen generator for cutting machines, please consult

Our machines only consume 30KW of electricity a day. And it drives two laser handheld welders at the same time. Very economical,





CNC cutting Machine

Table CNC Cutting Machine









COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Technical Specifications


Model	DMTC-1530
Effective cutting area	1500*3000mm (4.9*9.8 ft)
Cutting mode	Plasma oxy-fuel(Option)
Plasma cutting thickness	Depends on plasma source
Oxy-fuel cutting thickness	5mm—50mm (1/5—2 inch)
Drive system	Dual drive, stepper motors/servo motors
CNC system	Fangling CNC controller
Torch height control	Arc voltage auto THC and anti-collision for plasma cutting
Running speed regulation range	0—12000 mm/min
Workable option	Water workable

Spare Parts



Plasma Power Sourses

Gantry CNC Cutting Machine

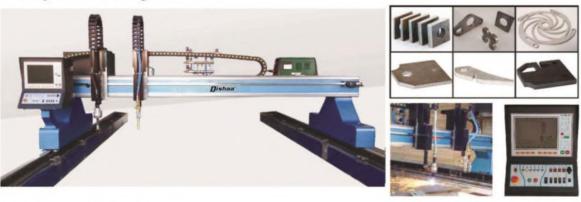

Technical Specifications

Model	DMSC-3000/4000
Track span	3000mm/4000mm
Effective cutting width	2300mm-3300 (7.5ft-10.8ft)
Effective cutting length	Standard 4500mm, can be extended per 2000mm
Cutting mode	Plasma, oxy-fuel or plasma+oxy-fuel
Torch height control	Arc voltage auto THC and anti-collision for plasma cutting



Technical Specifications

Model	DMGC-4000/5000/6000/8000
Track span	4000/5000/6000/8000mm
Working width	3300/4300/5300/7300mm (10.8ft/14.1ft/17.3ft/23.9ft)
Working length	Depends on customer's requirement
Cutting mode	Plasma, oxy-fuel or plasma+oxy-fuel
Cutting thickness	2200mm (1/10—7inchs)
Drive system	Duel drive, servo motors
CNC system	Hyperthem/ Fangling CNC
Torch height control	Arc voltage auto THC and anti-collision for plasma cutting
Cutting speed	0-10000mm/min
Optional functions	Capacitance auto THC for oxy-fuel cutting, auto ignition for oxy- fuel cutting, underwater plasma cutting, power marking, bevel cutting, laser position, chair, different color

GANTRY CNC





CNC 4-Roller Plate Rolling Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Advantages

- 1. Hydraulic-driven, high efficiency(driving power equivalent 60% traditional;
- 2.Permanent lubrication technology(bearing life period without refueling);
- 3.Clamping pressure is adjustable(non-existent skidding, productivity is 50-80% than three roller plate rolling clamping);
- 4. Rolling diameter can catch 1.1 times of the top roller;
- 5.lt can meet many kinds of demands

Following users apply to use the machine:

- 1. Operators to lack of experience and require high efficiency;
- 2. Require high accuracy to improve products quality;
- 3.Only need one operator to reduce labor costs;
- 4. Require conveying device, feeding device and support device
- because of large size plate or high productivity or security; 5.Require CNC operation to reduce errors caused by human factors.





Technical Parameters

Specifications & models	Max.Pre-rolling thickness(mm)	Max.Rolling thickness(mm)	Diameter of upper roller(mm)	Plate width (mm)	Main motor power(kw)
DW12-3X1500	2	3	135	1500	2.2
DW12-5X1500	3	5	190	1500	4
DW12-10X2000	8	10	240	2000	11
DW12-10X2500	8	10	260	2500	15
DW12-12X2000	10	12	260	2000	15
DW12-15X2000	12	15	265	2000	18.5
DW12-15X2500	12	15	280	2500	22
DW12-20X2000	16	20	300	2000	30
DW12-20X2500	16	20	340	2500	30
DW12-25X2500	20	25	390	2500	30+7.5
DW12-25X3000	20	25	420	3000	37+7.5
DW12-30X2500	25	30	420	2500	37+7.5
DW12-30X3000	25	30	460	3000	45
DW12-35X2500	30	35	460	2500	45
DW12-35X3000	30	35	510	3000	55
DW12-35X3500	30	35	550	3500	55
DW12-40X2500	35	40	510	2500	55
DW12-40X3000	35	40	550	3000	55
DW12-40X3500	35	40	560	3500	55+7.5
DW12-50X2500	45	50	560	2500	55+7.5
DW12-50X3000	45	50	605	3000	55
DW12-50X3500	45	50	640	3500	75
DW12-60X3000	50	60	670	3000	75
DW12-60X3500	50	60	700	3500	75
DW12-70X3000	65	70	720	3000	90
DW12-70X3500	65	70	760	3500	90
DW12-80X3000	70	80	780	3000	90
DW12-80X3500	70	80	840	3500	55X2
DW12-80X4000	70	80	870	4000	55X2
DW12-90X3000	80	90	810	3000	75X2
DW12-90X3500	80	90	890	3500	75X2
DW12-90X3000	80	90	925	4000	75X2
DW12-100X3000	85	100	850	3000	45X4
DW12-100X3500	85	100	925	3500	45X4 45X4
DW12-100X3300	85	100	960	4000	45X4 45X4
DW12-100X4000					
	100	120	940	3000	55X4
DW12-120X3500	100	120	980	3500	55X4
DW12-120X4000	100	120	1020	4000	55X4
DW12-140X3000	115	140	1000	3000	75X4
DW12-160X3500	130	160	1220	3500	90X4
DW12-180X3000 DW12-200X4000	150 160	180	1280 1500	3500 4000	55X8 75X8

CNC 4-ROLLER PLATE ROLLING

68





3-Roller Plate Rolling Machine for Shipbuilding





Technical Parameters

Model	Max bending thickness (mm)		Yielding Linit Mpa	Diameter of upper roller(mm)	Main motor power (kw)
DW11V-5X7000	5	7000	245	440	-11
DW11V-6X9500	6	9500	245	500	15
DW11V-8X6000	8	6000	245	420	15
DW11V-8X7000	8	7000	245	450	15
DW11V-8X8000	8	8000	245	470	15
DW11V-8X9500	8	9500	245	510	15
DW11V-10X6000	10	6000	245	440	15
DW11V-10X9000	10	9000	245	470	15
DW11V-12X6000	12	6000	245	460	15
DW11V-12X9000	12	9000	245	530	22
DW11V-16X6000	16	6000	245	500	22
DW11V-20X6000	20	6000	235	550	30

Technical Parameters

Model type	Max. thickness (mm)	Yield limit (Mpa)	Max. width (mm)	Max. thickness (mm)	Diameter of upper roller(mm)	Rolling speed (m/min)	Main motor power(Kw)	Outline size (mm)	Weight (kg)
DW11H-4X2500	2	245	2500	2	160	5.2	5.5	3.17X1.17X1.32	4600
DW11H-6X2000	4	245	2000	6	160	5.2	5.5	3.21X1.17X1.31	4000
DW11H-6X2500	4	245	2500	6	190	5	5.5	3.71X1.17X1.31	5800
DW11H-8X2000	5	245	2000	8	190	5	5.5	3.21X1.17X1.31	4200
DW11H-8X2500	5	245	2500	8	230	5	5.5	4.65X1.32X1.45	6200
DW11H-8X3200	6	245	3200	8	270	5	7.5	5.12X1.62X1.62	7300
DW11H-12X2000	8	245	2000	12	230	5	5.5	4.15X1.32X1.49	6000
DW11H-12X2500	8	245	2500	12	270	4.5	7.5	4.42X1.62X1.64	7000
DW11H-12X3200	8	245	3200	12	300	5	18.5	5.58X1.36X1.49	9200
DW11H-16X2000	12	245	2000	16	270	5	7.5	3.29X1.62X1.62	6800
DW11H-16X2500	12	245	2500	16	300	5	18.5	4.88X1.36X1.49	8400
DW11H-16X3200	12	245	3200	16	330	5	18.5	5.33X1.96X1.75	13500
DW11H-16X4000	12	245	4000	16	380	5	18.5	6.13X1.96X1.75	18000
DW11H-20X2000	14	245	2000	20	300	5	18.5	4.38X1.36X1.49	8000
DW11H-20X2500	14	245	2500	20	330	4	18.5	4.63X1.96X1.75	12000
DW11H-20X3200	14	245	3200	20	330	4	18.5	5.33X1.96X1.75	15000
DW11H-25X2000	20	245	2000	25	330	4	18.5	4.63X1.96X1.75	13000
DW11H-25X3200	20	245	3200	25	420	4	22	5.3X2.42X2.51	22000
DW11H-32X2000	25	245	2000	32	360	4	22	4.5X2.42X2.51	16000
DW11H-35X2500	25	245	2500	35	460	4	30	5.7X2.85X2.97	22000

3-Roller Plate Rolling Machine for Vehicle





Technical Parameters

Model	Max bending thickness(mm)	Max plate width(mm)	Yielding Linit(Mpa)	Main motor power(kw)	
DW11C-20X8000	20	8000	245	45	
DW11C-25X12000	25	12000	245	55	
DW11C-30X12000	30	12000	245	75	
DW11C-30X16000	30	16000	245	110	

The Other 3-Roller Plate Rolling Machine



Technical Parameters

Specification	Max. thickness of colled plate (mm)	Max. width of coiled plate (mm)	Max. thickness prefiex (mm)	Yield limit (Mpa)	Diameter of upper roller (mm)	Main motor power(KW)
DW11XNC-35X3000	35	3000	30	245	520	45
DW11XNC-40X2500	40	2500	35	245	510	45
DW11XNC-40X3000	40	3000	35	245	550	55
DW11XNC-40X4000	40	4000	32	245	630	55
DW11XNC-55X3000	55	3000	45	245	630	75
DW11XNC-65X4000	65	4000	60	245	840	90
DW11XNC-75X3000	75	3000	65	245	750	90
DW11XNC-90X3000	90	3000	75	245	820	110
DW11XNC-100X3000	100	3000	90	245	880	110
DW11XNC-120X3000	120	3000	100	245	920	132
DW11XNC-160X4000	160	4000	130	245	1280	220

3-ROLLER PLATE ROLLING



Upper Roller Universal Plate Rolling Machine



Technical Parameters

Dishaa®

Model	Pressureon the upper roller(Tons)	Max Pre-bending thickness(mm)	Max bending thickness(mm)	Diameter of the upper roller(mm)	Max plate width(mm)	Main motor power(kw)
DW11S-8X1500	55	6	8	175	1500	3
DW11S-10X2000	60	8	10	235	2000	4
DW11S-10X2500	60	8	10	255	2500	5.5
DW11S-12X1500	60	10	12	245	1500	4
DW11S-12X2000	75	10	12	250	2000	5.5
DW11S-12X2500	75	10	12	270	2500	7.5
DW11S-13X3000	75	11	13	290	3000	7.5
DW11S-14X2500	75	11	14	270	2500	7.5
DW11S-15X2000	75	12	15	255	2000	7.5
DW11S-15X3000	100	12	15	325	3000	7.5
DW11S-16X2000	100	12	16	255	2000	7.5
DW11S-16X2500	100	12	16	300	2500	11
DW11S-20X2000	130	16	20	260	2000	11
DW11S-20X2500	130	16	20	330	2500	15
DW11S-25X2500	200	20	25	380	2500	18.5
DW11S-25X3000	200	20	25	430	3000	22
DW11S-30X2500	230	25	30	410	2500	22
DW11S-30X3000	270	25	30	450	3000	30
DW11S-35X2500	270	30	35	460	2500	30
DW11S-35X3000	300	30	35	500	3000	37
DW11S-40X2500	380	35	40	500	2500	37
DW11S-40X3000	380	35	40	540	3000	45
DW11S-50X3000	610	40	50	580	3000	55
DW11S-50X3500	610	40	50	620	3500	55
DW11S-60X3000	690	50	60	650	3000	55
DW11S-60X3500	690	50	60	680	3500	75
DW11S-60X4000	690	50	60	780	4000	75
DW11S-70X3000	850	60	70	710	3000	75
DW11S-70X3500	850	60	70	740	3500	75
DW11S-80X3000	930	70	80	760	3000	75
DW11S-80X3500	930	70	80	820	3500	75
DW11S-80X4000	930	70	80	860	4000	90
DW11S-100X3000	1150	90	100	820	3000	90
DW11S-100X3500	1150	90	100	860	3500	90
DW11S-100X4000	1350	90	100	900	4000	90
DW11S-120X3000	1350	100	120	860	3000	110
DW11S-120X4000	1600	100	120	990	4000	110
DW11S-125X3000	1600	105	125	880	3000	110
DW11S-160X4000	1800	130	160	1260	4000	2X90
DW11S-200X4000	2000	170	200	1480	4000	2X132

Hydraulic Symmetric 3-Roller Plate Rolling Machine







Technical Parameters

Model	Max. Bending Thickness (mm)	Max. Plate Width (mm)	Yielding limit of sheet metal (Mpa)	Rolling speed (m/min)	Min. Bending Diameter (mm)	Diameter of upper roller	Diameter of lower roller	Main motor power (kw)
DW11NC-20X3000	25	3000	245	4	1200	430	370	30
DW11NC-25X2500	25	2500	245	4	1200	370	300	22
DW11NC-30X2000	30	2000	245	4	1200	360	290	22
DW11NC-30X3000	30	3000	245	4	1200	450	390	30
DW11NC-40X3000	40	3000	245	3.5	1600	540	440	45
DW11NC-50X3000	50	3000	245	3.5	2000	580	480	55
DW11NC-60X3000	60	3000	245	3.5	2400	660	560	75
DW11NC-70X3000	70	3000	245	3.5	2800	710	620	90
DW11NC-80X3000	80	3000	245	3.5	3200	770	680	90
DW11NC-90X3000	90	3000	245	3.5	3600	820	730	110
DW11NC-100X3000	100	3000	245	3.5	4000	860	770	110
DW11NC-110X3000	110	3000	245	3.5	4400	900	810	132
DW11NC-120X3000	120	3000	245	3.5	4800	950	860	132



Dishaa®

Iron Worker







COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



















FEATURES

Hydraulic transmission, is the lastest product of the multi-function joint punching and shearing machine, shearing, punching, die cut flat steel, square steel, round steel, angle steel, channel steel, I-beam carried, and equipped with shear blockfeeding devices.













Rexroth Valve

Schneider Electrics

Siemens Motor

TECHNICAL PARAMETERS

MODEL	DMIW-16	DMIW-20	DMIW-25	DMIW-30	DMIW-40
Punching Pressure (T)	60T	90T	120T	160T	200T
Max.cutting thickness of sheet plates (mm)	16	20	25	30	40
Material strength (N/mm)	≤450	≤450	≤450	≤450	≤450
Angle of shear (°)	7°	8°	8°	8°	8°
Flat bar shearing (T×W)	16×250 8×400	20×330 10×480	25×330 16×600	30×335 20×600	40×335 30×600
Max.length of cylinder stroke (mm)	80	80	80	80	100
Trips frequency (times/min)	11-20	12-20	8-18	6-16	6-16
Depth of throat (mm)	300	355	400	600	530
Punch depth (mm)	16	20	25	28	35
Max.punching diameter (mm)	25	30	35	38	40
Motor Power (KW)	5.5	7.5	11	15	18.5
Overall dimensions (L×W×H) (appro.)	1740×810×1830	1950×900×1950	2355×960×2090	2800×1050×2450	2900×1100×2500

(I- BEAM, CHANNEL STEEL NEEDS TO BE ORDERED SEPERATELY

PRO	FILE	SECTION	DMIW-16	DMIW-20	DMIW-25	DMIW-30	DMIW-40
Round Bar			45	50	60	65	70
Square Bar			40×40	50×50	50×50	55×55	60×60
	90°Shearing		120×120×12	140×140×12	160×160×14	180×180×16	200×200×18
Equal Angle	45°Shearing		50×50×5	70×70×10	60×60×6	80×80×8	80×80×10
T-Bar	90°Shearing		125×125×12	140×140×12	160×160×14	180×180×16	200×200×18
1-541	45°Shearing		60×60×8	70×70×10	80×80×10	80×80×10	100×100×10
I-beam			120×74×5	160×88×6	200×102×9	280×124×10.5	300×130×13
Channel			120×53×5.5	160×63×6.5	200×75×9	280×86×11.5	300×89×11.5


IRON WORKER





Hydraulic Press Machines

Manual H Frame Press



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Features

- · HP series hydraulic press are used for assembling, dismantling, alignment, calendaring, tension, bending and punching.
- The machine supplied oil by Italy CNK and CBZ pump. It could save 60% energy compared with the traditional model. The efficiency increased to 2-3 times. It takes the advantages of small volume high pressure, simple structure and light weight

Application

. The machine is suitable for operating in the open air or the other special situation



	MODEL	CAPACITY KN	PRESSURE MPA	TRAVEL MM	TABLE SIZE MM	DIMENSION MM	WEIGHT KG
	DHP-10S	100	50	160+370	197x455	670x520x1210	55
	DHP-20S	200	50	200+450	200x300	500x350x1300	260
	DHP-30S	300	50	200+450	300x400	550x400x1500	320
Manual H	DHP-50S	500	60	250+450	360x680	1000x600x1750	460
frame Press	DHP-63S	630	30	220+405	400x500	1500x650x1950	1020
	DHP-100S	1000	45	260+450	400x600	1600x720x2000	720/820
	DHP-150S	1500	40	260+450	800x400	1730x720x2150	1100
	DHP-20	200	25	200+270	200*300	1160*550*1600	400
	DHP-30	300	25	200+270	300x400	1160x550x1600	420
	DHP-50	500	25	220+405	360x480	1500x650x1950	980
H Frame	DHP-63	630	30	220+405	400x500	1500x650x1950	1020
Hydraulic	DHP-100	1000	31.5	250+405	700x460	1730x730x2250	1220
Press	DHP-150	1500	30	250+405	440x980	1730x730x2250 630x730x960	1350
	DHP-200	2000	31.5	300+405	980x500	1940x950x2350 900x800x1060	2200
	DHP-20M	200	25	220+405	400x500	1300x650x1750	980
	DHP-30M	300	25	220+405	400x500	1500x650x1950	980
	DHP-50M	500	25	220+405	400x500	1500x650x1950	980
	DHP-63M	630	25	220+405	400x500	1500x650x1950	1020
H Frame Press with	DHP-100M	1000	30	250+405	440x980	1730x730x2250 730x630x960	1220
Moving Cylinder	DHP-150M	1500	30	250+405	440x980	1730x730x2250 730x630x960	1350
	DHP-200M	2000	31.5	300+405	500×1000	1940x950x2350 900x800x106	2200
	DHP-300M	3000	31.5	300+405	700x1200	2100x950x2700 1100x1200x1350	4200

www.dishaagroup.com

PRESS

76





Pneumatic Press Machine

JH21 Series Punch Press



COMPLETE FACTORY SETUP TURNKEY SOLUTIONS

Features

- Steel plate welded body, stiffness, more stable.
- Dry pneumatic friction clutch brake, friction machine for semi metallic materials.
- The imported safe double valve control, quick, safe and reliable
- Mold height realize electric adjustment, digital display control height.
- Slider use rectangle hexahedron extended guide, bronze lining board, high guidance accuracy.
- International famous brand special press control system,
- · Automatic feeding device and all kinds of automation equipment

Application

- · Suitable for blanking, punching, forming, bending, stretching and other cold stamping process to achieve.
- · Widely used in electrical appliances, vehicles, tractors, mining machinery, hardware tools, machinery manufacturing and other industrial areas.

Specification	Units	JH21-25	JH21-45	JH21-63	JH21-80
Nominal pressure	KN	250	450	630	800
Nominal force stroke	mm	3	4	4	5
Slider stroke	mm	80	100	120	140
Number of slider stroke	s. p .m	100	80	70	60
Max. die set height	mm	250	270	300	320
Die set height adjustment	mm	50	60	80	80
Distance from slider center to frame	mm	210	230	300	300
Worktable dimension(L x W)	mm	400x700	440x810	580x900	580x1000
Workbench plate hole size	mm	Ф150	Ф160	Ф180	Ф180
Thickness of the worktable panel	mm	80	110	110	120
Slider ground size (L x W)	mm	250x360	340x410	400x480	420x560
Size of the handle hole (diameter *depth)	mm	Ф40 х60	Ф40 х6	Ф50 х80	Ф50 х80

Specifications are subject to change without prior notice

Four Column Deep Drawing Hydraulic Press



Features

- The host of the series of products using three beam four column structure, hydraulic system 100 tons below the use of plate type integrated oil circuit, 100 tons or more of the cartridge valve oil circuit, electrical system using relay or PLC control circuit, centralized operation via an external button, can realize the adjustment and semi automatic operation mode. Whole machine has the advantages of simple structure, compact structure, reasonable economy, reliable operation, long service life, small hydraulic impact force, and reduced connection pipeline and leakage.
- · Work pressure of the series products, pressing speed, travel range can be adjusted according to the requirements within the specified range, can achieve constant pressure and constant stroke of two kinds of Technology. When the constant pressure is formed, the pressure holding time delay and the automatic return stroke are pressed. A top out device is arranged in the middle of the working table, in addition to the top products, can be used as hydraulic cushion for the forming process of drawing parts.

SPECIFICATIONS	UNITS	DM60T	DM100T	DM160T	DM200T	DM500T	DM630T
Nominal force	KN	600	1000	1600	2000	2500x2	3150x2
Ejector force	KN	200	400	400	630	1000	1000
Max. working force of liquid	MPA	25	25	25	25	25	25
Slide stroke	mm	450	400	800	800	900	800
Ejection stroke	mm	200	200	300	300	300	300
Table effective size	mmxmm	580x500	800x800	1600x1200	1000x1000	2500x1400	1260x1200
Empty stroke descent speed	mm/s	100	120	120	130	120	130
Slow down speed	mm/s	25	35	30	30	25	30
Pressing speed	mm/s	9	10	15	12	6-10	9
Return speed	mm/s	80	80	90	80	70	80
Motor power	KW	5.5	7.5	11	15	37	37

78





Hydraulic Press



SPECIFICATION

FOUR-COLUMN HYDRAULIC PRESS

	Model		D4HP4ST	D4HP-100T	D4HP-180T	D4HP-200T	D4HP-260T	D4HP-315T	D4HP-400T	D4HP-500T	D4HP-630T	D4HP-800T	D4HP-1000T	D4HP-1260T	D4HP-1600T	D4HP-2000T	D4HP-2500T	D4HP-300
Nomina	I Force	KN	630	1000	1600	2000	2500	3150	4000	5000	6300	8000	10000	12500	16000	20000	25000	30000
Return	Force	KN	160	250	250	400	630	630	630	1000	1600	2000	2000	2000	2500	3150	4000	5000
Day	light	mm	800	800	1000	1120	1120	1250	1250	1500	1500	1500	1600	1500	1600	1800	2000	2000
Slide :	Stroke	mm	500	500	650	710	710	800	800	900	900	900	1000	1000	1000	1200	1200	1200
Rejection	n Stroke	mm	200	200	200	250	250	300	360	360	360	360	450	400	450	450	500	500
	Descent	mm/s	40	70	40	80	>150	120	100	>100	>100	>100	>150	>150	>150	>150	>150	>150
Speed Of Slide	Pressing	mm/s	7	15	8	5-12	6-15	5-12	4-10	4-10	5-12	5-12	4-10	4-10	4-10	4-10	4-10	5-12
Silve	Return	mm/s	580	100	65	70	>150	65	70	50	100	90	100	85	>100	160/60	≥100	120
Table Size	LR	mm	550	630	800	900	1000	1200	1200	1400	2000	2000	2000	2500	2500	3000	3500	4000
	F-8	mm	630	630	800	900	1000	1200	1200	1400	1600	1600	1800	2000	2000	2500	2500	2600
Table High	Above Floor	mm	700	700	550	550	650	700	600	500	500	300	300	200	200	200	200	200
	L-R	mm	2370	2370	1150	3200	5400	3180	3785	4070	4390	4800	7010	5890	6500	6870	7630	8530
Overall Dimensions	F-B	mm	900	900	800	900	1500	1200	1200	1648	2150	2854	3000	3450	3900	2500/4500	5000	4000
оппинаюна	Hight Above Floor	mm	2770	2770	2600	4085	4740	4570	4667	5348	5300	5400	5740	6980	7500	7500	7840	8500
Motor	Power	KW	7.5	7.5	11	15	15	22	22	38	45	60	75	60	70	90	120	170

Standard Equipment


















Optional Equipment













COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Hydraulic Press



Technical Parameters

٨	4odel		DDHP-200	DOHP-250	DDHP-316	DOHP-400	DOHP-400A	DDHP-500	DOHP-500A	DDHP-5008	DDHP-630	DDHP-630A	DDHP-800	DOHP-800A	DDHP-1000	DOHP-1006A	DDHP-1250	DDHP-1600	DOHP-2000	DOHP-2500	DDHP-300
Nominal	Force	KN	2000	2500	3150	4000	4000	5000	5000	2500°2	6300	3150*2	8000	8000	10000	10000	12500	16000	20000	25000	30000
Return	Force	KN	240	400	600	500	500	900	900	400	850	600*2	900	900	1250	1250	1250	2000	2000	2250	2250
Working I	Pressure	Мра	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
Coshion F	ressure	KN	400	400	630	1000	1000	1600	2000	1000	2500	1250*2	1000	1000	1600	1600	1600	2400	2400	3000	3000
Cushion Ret	lum Force	KN	250	320	360	360	360	780	780	320*2	720	380*2	3000	3000	5000	5000	5000	5000	2500	800	1000
Daylight (Of Slide	mm	1120	1120	1250	1250	1250	1500	1500	1500	1500	1500	1800	1800	1800	2200	1800	2000	2100	2000	2500
Stroke	Upper Slide	mm	710	710	800	800	800	900	900	900	900	900	1200	1200	1000	1500	1000	1200	1300	1100	1600
Strone	Cushion	mm	250	250	300	300	300	350	350	350	350	350	400	400	365	500	400	400	350	400	400
	LR	mm	1000	1100	1260	1250	1750	1400	2200	2200	1600	2500	3200	3200	3200	4000	4000	4000	4500	4500	4500
Table Size	F-8	mm	940	1000	1160	1250	1250	1400	1600	1600	1600	1800	2200	2200	2300	2300	2500	2500	2500	2500	2500
Cushion Size	LR	mm	660	700	820	820	1270	970	1720	1720	1120	2020	2550	2550	2550	3500	3370	3820	3750	3820	3820
Continuou atte	FB	mm	600	600	700	820	820	900	1120	1120	1120	1270	1700	1700	1800	1800	1870	1870	1800	1700	1600
	Descent	mm/s	150	130	100	130	130	120	150	150	130	140	300	300	300	300	350	350	350	350	350
Speed Of Slide	Pressing	mm/s	5-12	7-15	5-12	4-10	4-10	7-15	7-15	7-15	5-12	5-12	8-22	8-22	12-30	12-30	12-30	12-30	12-30	12-30	12-30
	Raturn	mm/s	95	90	60	70	70	80	90	90	85	85	200	200	250	250	300	300	300	300	300
Table High A	bove Floor	mm	700	700	600	600	600	550	550	550	500	500	500	720	900	400	400	400	350	350	350
Overall	LR	mm	3100	3250	3100	3150	3700	5800	6600	6600	4150	5100	5400	5400	5400	6200	6200	6200	6700	6700	6700
Dimensions	F-8	mm	1350	1350	2100	2300	2300	2600	2600	2600	2600	2600	2900	5000	3000	5200	3200	3200	3300	3300	3300
Motor f	Power	KW	15	22	22	22	22	2*22	2*22	2*22	2*22	2*22	96	105	160	160	160	200	380	410	500

Standard Equipment

















Optional Equipment









COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Hydraulic Press



- Adopt Gantry frame type structure, welded by high quality steel plate.
- The forged steel is quenched and treated, with high hardness and long service life.
- Polished and chromed with high rigidity treatment.
- Adjustable opening height (daylight).
- Check the hydraulic oil volume and temperature.
- The main seal of the cylinder adopts high quality seal ring to ensure reliable sealing.
- There are T-slots on the working table and slider, which are convenient for mold installation.

Standard Equipment










Optional Equipment

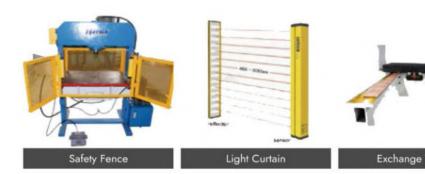

Technical Parameters

Model		DL-20T	DL-20TK	DL-40T	DL-40TK	DL-60T	DL-60TK	DL-100T	DL-100TK
Nominal Force	KN	200	200	400	400	600	600	1000	1000
Stroke	mm	200	200	200	200	200	200	350	350
System Pressure	Mpa	25	25	30	30	30	30	25	25
Working Table Size (Left And Right)	mm	360	400	400	400	400	400	440	440
Working Table Size (Front And Back)	mm/s	400	460	460	460	490	490	650	650
Down Speed	mm/s	15	40	6	45	6	45	6	16
Return Speed	mm/s	23	50	8	60	8	60	8	20
Motor Power	KW	2.2	4	2.2	7.5	2.2	7.5	7.5	7.5

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Hydraulic Press Machines

Open Side C Type Hydraulic Press





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Features

HP series open side hydraulic press, with trihedral open worktable, suitable for assembling and dismantling complex structure and large volume parts. Adapt to many different occasions, wide application

SPECIFICATION	UNIT	DHP-20C	D HP-30C	DHP-50C	DHP-63C	DHP-100C
Capacity	KN	200	300	500	630	1000
Pressure	MPA	25	25	31.5	31.5	31.5
Travel	mm	300	300	300	300	400
Tale size	mm	400x300	400x300	400x600	400x700	500x800
Dimension	mm	800x600x1500	800x600x1500	800x1200x1950	800x1200x1950	1000x1600x2100
Weight	Kg	860	1160	2800	3200	4800

Power Press Machine





Features

- Steel plate welding machine, good rigidity, more stable accuracy.
- Crankshaft longitudinal, compact structure, beautiful appearance.
- Electric adjustment of the height of the mould, digital display control height.
- Rectangular block with a lengthened guide, bronze lining board, high guidance accuracy.
- Combined pneumatic friction clutch brake, joint stable, action sensitivity.
- Collapse type safety device, to ensure the safety of the whole machine.
- Slider is high, there is a lifting type balance cylinder, to achieve the balance of the slider bar.
- · The slider can be moved with a small movement, emergency stop motion, more secure operation.
- The circuit uses double valve control, the action is nimble, accord with the safety standard of press.

Application

- Suitable for blanking, punching, forming, bending, stretching and other cold stamping process to achieve.
- Widely used in electrical appliances, vehicles, tractors, mining machinery, hardware tools, machinery manufacturing and other industrial areas.

Weight			1090	3800	5015	6120
Overall dimension	verall dimension (L x W x H)		1130X830X1890	1740X1100X256	1765X1265X2560	1940X1490X2850
Maximum tilting	angle of body	0	25	25	20	20
	Power	KW	1.5	5.5	5.5	7
Main motor	Model		Y90L-4	YI32S-4	Yl32S-4	Yl32M-4
Vertical columns	distance	mm	240	320	300	420
Size of the handle	e hole (diameter x depth)	mm	cp40x60	cp50x70	cp60x80	cp60x80
Thickness of the	worktable panel	mm	45	70	80	90
Worktable dimer	nsion	mm	320x460	420x650	470x750	570x860
Distance from sli	der center to frame	mm	160	250	260	310
Die set height ad	justment	mm	30	50	60	80
Maximum die se	t height	mm	170	250	300	300
Number of slider	77.7	/min	140	50	50	40
Slider stroke	- HADAN - HA	mm	50	80	100	100
Nominal force st	roke	mm	2	4	5	5
Nominal pressur	e	KN	160	630	800	1000
Specification	ecification		JB23-16	JB23-63	JB23-80	JB23-100

POWER PRESS





Arbor Press





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Performance Characteristics

- · The Arbor presses have the advantages of small volume, simple structure.
- High quality cast-iron body, study design.
- For press-fitting and pulling bearings, 4-position plate.
- Chrome-plate steel pinion and ram.

Applications

The machine is suitable for operating in the open air or the other special situation.

Specification	Units	½ TON	1 TON	2 TON	3 TON	5 TON
Capacity	Ton	0.5	1	2	3	5
Max height & dia	MPA	90x80	110x100	180x123	285x163	400x226
Largest Arbor	mm	26	29	40	44	70
Ram square	mm	19x19	25x25	32x32	38x38	50x50
Base size	mm	240x170	268x190	432x260	455x300	645x176
Press Ht	mm	280	355	445	615	815
Dimension	cm	26x12x29	29x14x35	46x20x45	46x24x64	76x37x95
N.W/G.W	Kg	11/12	15/16	36/38	63/65	155/166

Pipe Notching & Belt Grinding Machine



Technical Parameters

MODEL	DSM100MF
Voltage	400V / 50HZ
Motor	2.5 / 3.3 kW
Calibration Diameter	20-76mm
Install corner	30-90°
Abrasive Belt (B*L)	100mm-2000mm
Packing Dimensions(L*B*H)	1340mm*700mm*1210mm
Weight	159kg

PIPE NOTCHING

U

LT GRINDING





Lathe Machine



SPECIFICATIONS		Units	DSL250	DSL280	DSL320B	DSL360
Swing over bed		mm	250	280	320	360
Swing over cross slide		mm	150	150 165		240
Distance between cent	ers	mm	500(Opt.700)	500(Opt.750)	600(Opt.750)	750
Spindle bore		mm	26	38	38	38
Spindle bore taper		*	MT4	MT5	MT5	MT5
Spindle speed steps		*	12	8	12	12
Spindle speed range		rpm	80-1600	90-1800	80-1600	80-2000
Cross slide travel		mm	130	140	160	180
Top tool post travel		mm	75	75	100	100
Longitudinal feeds rang	ge	mm/r	0.03-0.275	0.05-0.35	0.1-1.4	0.1-1.4
Cross feeds range):	mm/r	0.015-0.137	0.025-0.18	0.045-0.6	0.045-0.60
Kinds of metric threads		kinds	15	18	22	22
Range of metric threads		mm	0.25-2.5	0.2-3.5	0.2-7	0.2-7
Kinds of inch threads		kinds	9	34	45	45
Range of inch threads		T.P.I.	12-96	41/2-48	21/2-48	21/2-48
Kinds of module thread	ds .	kinds	-	16	21	21
Range of module threa	dsr	MP	•	0.20-1.75	0.2-3.5	0.20-3.5
Kinds of pitch threads		kinds		24	31	31
Range of pitch threads		DP	÷.	16-120	8-120	8-120
Tailstock quill taper		-	MT3	MT3	MT3	MT3
Tailstock quill travel		mm	60	60	80	80
Main motor power		kw	0.75	0.75	0.75	1.1
	Weight for 500	kg	180	300		
	Weight for 600	kg		-	450	
Machine weight	Weight for 700	kg	200	-		-
	Weight for 750	kg		320	480	550
	Dimension for 500	mm	1130×550*1170	1200*650*1200		
	Dimension for 600	mm		-	1370*685*1360	-
Overall dimension	Dimension for 700	mm	200			-
	Dimension for 750	mm		1450*650*1200	1520*685*1360	1370*705*1430



SPECIFICATIONS		Units	D6132D	D6232D	D6136D	D6236D	D6140D	D624
Swing over bed		mm	32	320		60	400	
Swing over cross slide		mm	18	30	2	00	240	
Swing over gap		mm	-	500		540		580
Distance between cente	rs	mm	750/	1000	750/	1000	750/	1000
Spindle bore		mm	5	2		52	5	2
Spindle bore taper		-	M	T6	N	T6	M	T6
Spindle speed steps		steps	1	2	1	12	1	2
Spindle speed range		rpm	30-1	600	30-	1600	30-1	1600
Cross slide travel		mm	24	10	2	40	2	40
Top tool post travel		mm	14	10	1	40	1	40
Tool size		mm	20 '	20	20	20 * 20		* 20
Longitudinal feeds range	1	mm/r	0.039	-1.05	0.039	9-1.05	0.039	9-1.05
Cross feeds range		mm/r	0.019	-0.52	0.019	9-0.52	0.019	9-0.52
Kinds of metric threads		kinds	2	5	1	25	2	:5
Range of metric threads	ir.	mm	0.5	-20	0.5	-20	0.5	-20
Kinds of inch threads		kinds	3	5		15	3	15
Range of inch threads		T.P.I.	13/4	-80	13/	-80	13/4	-80
Tailstock quill diameter		mm	6	0		50	6	60
Tailstock quill taper			M	T4	N	T4	M	T4
Tailstock quill travel		mm	10	00	1	00	10	00
Main motor power		kw	3	3		3		4
Coolant motor power		kw	0.0	09	0.	09	0.	09
Machine weight	Weight for 750	kg	14	00	15	600	17	00
Machine weight	Weight for 1000	kg	15	00	16	600	18	00
Overall dimension	Dimension for 750	mm	2200*11	40*1600	2200*11	40*1600	2200*11	40*1600
Overall dimension	Dimension for 1000	mm	2400*11	40*1600	2400*11	40*1600	2400*11	40*1600



Dishaa®

Lathe Machine

DZ1224G / DZ1237G DZ1324G / DZ1337G

Lathe Machine

Precision spindle bearing

Longitudinal and cross automatic feed

All geared spindle box



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

SPECIFICATIONS	Units	DZ1224G	DZ1237G	DZ1324G	DZ1337G
Swing over bed	mm	305	305	330	330
Swing over cross slide	mm	173	173	215	215
Swing over gap	mm	440	440	485	485
Distance between centers	mm	530	940	530	940
Spindle bore	mm	38	38	38	38
Spindle bore taper		MT5	MT5	MT5	MT5
Spindle speed steps	-	9	9	9	9
Spindle speed range	rpm	64-1500	64-1500	64-1500	64-1500
Cross slide travel	mm	150	150	150	150
Top tool post travel	mm	85	85	85	85
Feeds range	mm/r	0.051-0.303	0.051-0.303	0.051-0.303	0.051-0.303
Kinds of metric threads	kinds	11	11	11	11
Range of metric threads	mm	0.5-3.5	0.5-3.5	0.5-3.5	0.5-3.5
Kinds of inch threads	kinds	14	14	14	14
Range of inch threads	T.P.I.	7 1/2 -48	7 1/2 -48	7 1/2 - 48	71/2-48
Tailstock quill diameter	mm	32	32	32	32
Tailstock quill taper		MT3	MT3	MT3	MT3
Tailstock quill travel	mm	95	95	95	95
Main motor power	kw	1.1	1.1	1.1	1.1
Coolant pump motor	kw	0.04	0.04	0.04	0.04
Machine weight	kg	420	440	440	460
Overall dimension	mm	1780x750x1460	1420x750x1460	1780x750x1480	1420x750x148

DZ1237G/1 DZ1337G/1 DZ1340G/1 DZ1440G/1

Lathe Machine



Feature

- Precision spindle bearing
- All geared spindle box
- Longitudinal and cross automatic feed
- Quenched and precision grinding guide way
- Cam-lock spindle nose
- Wide range of thread processing

SPECIFICATIONS	Units	DZ1237G/1	DZ1337G/1	DZ1340G/1	DZ1440G/1
Swing over bed	mm	305	330	330	350
Swing over cross slide	mm	173	195	195	220
Swing over gap	mm	440	476	476	500
Distance between centers	mm	940	940	1000	1000
Spindle bore	mm	38	38	38(Optional:51)	38(Optional:51)
Spindle bore taper	- 8	MT5	MT5	MT5	MT5
Spindle speed steps		9	9	8	8
Spindle speed range	rpm	64-1500	64-1500	70-2000(Optional:84-1850)	70-2000(Optional:84-1850
Cross slide travel	mm	150	150	170	170
Top tool post travel	mm	85	85	74	74
Longitudinal feeds range	mm/r	0.052-1.392	0.052-1.392	0.052-1.392	0.052-1.392
Cross feeds range	mm/r	0.014-0.38	0.014-0.38	0.014-0.38	0.014-0.38
Kinds of metric threads	kinds	26	26	26	26
Range of metric threads	mm	0.4-7	0.4-7	0.4-7	0.4-7
Kinds of inch threads	kinds	34	34	34	34
Range of inch threads	T.P.I.	4-56	4-56	4-56	4-56
Kinds of threads module	kinds	16	16	16	16
Range of threads module	MP	0.35-5	0.35-5	0.35-5	0.35-5
Kinds of threads hreads diametral	kinds	36	36	36	36
Range of threads hreads diametral	DP	6-104	6-104	6-104	6-104
Tailstock quill diameter	mm	32	32	32	32
Tailstock quill taper	-	MT3	MT3	MT3	MT3
Tailstock quill travel	mm	95	95	95	95
Main motor power	kw	1.1	1.1	1.5	1.5
Coolant pump motor	kw	0.04	0.04	0.04	0.04
Machine weight	kg	515	525	635	645
Overall dimension	mm	1780x760x1460	1780x760x1480	1920x760x1480	1920x760x1500



Dishaa®

Lathe Machine

D6132 / D6136 / D6140 D6150 / D6160 / D6170

Lathe Machine





Main features

- Rail width is 360mm
- Thread processing need to change gears
- Tool size is 20x20mm
- Gears is steel of precision grinding and hardened

Standard configuration

- Hook wrench
- Inner hexagon spanner
- Single-ended wrench
- Socket wrench
- 3-jaw chuck
- Dead center
- Center sleeve
- Triangular belt
- Adjustment pad iron
- Foundation bolts
- Change gears

Optional configuration

- Steady Rest, Follow rest
- DRO
- Chuck cover ,Tool post cover ,Lead screw cover
- Foot brake
- Fast moving
- Live center
- 4 jaw chuck
- Drill chuck and holder
- Face plate
- Quick change tool post
- Taper turning attachment


SPECIFICA	TIONS	Units	D6132	D6232	D6136	D6236	D6140	D6240	D6150	D6250	D6160	D6260	D6170	D6270
Swing over bed	d	mm	33	20	3	60	40	00	50	00	600		700	
Swing over cro	ss slide	mm	15	150 190		23	230 330		400		500			
Swing over gap)	mm	-	480	-	520	-	560		660	-	760	-	860
Distance between	een centers	mm					750/	/1000/15	00/2000/	3000				
Spindle bore		mm	52	(pot.80)	52	(pot.80)	52	(pot.80)	52	(pot.80)	52(Opti	onal:80)	52	(pot.80)
Spindle bore ta	aper	-		T6 (pot. tric 1:20)		T6 etric 1:20)	MT (pot.Me		MT (pot.Me	-	M7 (pot.Me	6 tric 1:20)	MT6 (pot.Metric 1:20)	
Spindle speed :	steps	steps		9		9	9	9		9		9		9
Spindle speed	range	rpm	40-1	1400	40-	1400	40-1	.400	40-1	400	40-1	1400	40-1	1400
Cross slide trav	vel	mm	10	50	1	80	20	00	25	50	30	00	3	50
Top tool post to	ravel	mm	9	5	9	15	9	5	9	5	9	5	9	95
Tool size		mm	20	*20	20	*20	201	*20	201	*20	20	*20	20	*20
Longitudinal fe	eds range	mm/r	0.0832	-4.6569	0.0832	-4.6569	0.0832-4.6569		0.0832-4.6569		0.0832-4.6569		0.0832-4.6569	
Cross feeds ran	nge	mm/r	0.048	-2.688	0.048	-2.688	0.048-2.688		0.048-2.688		0.048-2.688		0.048-2.688	
Kinds of metric	threads	kinds	19		1	.9	19		19		1	.9	19	
Range of metri	ic threads	mm	0.25-14		0.2	5-14	0.25	5-14	0.25	5-14	0.25	5-14	0.2	5-14
Kinds of inch th	nreads	kinds	28		2	18	28		2	8	2	8	2	28
Range of inch t	threads	T.P.I.	2-40		2-	40	2-40		2-	40	2-	40	2-	-40
Kinds of thread	nds of threads module kinds		1	.7	1	7	1	7	1	7	1	.7	1	17
Range of threa	ds module	MP	0.25	-3.5	0.25	5-3.5	0.25	-3.5	0.25	-3.5	0.25	5-3.5	0.25	5-3.5
Tailstock quill d	liameter	mm	6	5	6	i5	6	5	6	5	6	5	6	55
Tailstock quill to	aper	-	M	T4	M	T4	M	T4	M	T5	M	T5	M	IT5
Tailstock quill to	ravel	mm	13	30	1	30	13	30	13	30	1	30	1	30
Main motor po	ower	kw	-	4		4		4	5	.5	5	.5	5	.5
Coolant pump	motor	kw	0.	09	0.	09	0.0	09	0.	09	0.	09	0.	.09
	Weight for 750	kg	11	.00	12	200	12	20	12	50	13	00	15	500
	Weight for 1000	kg	12	00	13	00	13	20	13	50	14	00	16	600
Machine weight	Weight for 1500	kg	14	00	15	00	15	20	15	50	16	00	18	300
wideline weight	Weight for 2000	kg	16	1600		00	17	20	17	50	18	00	20	000
	Weight for 3000	kg	18	00	19	000	19	20	19	50	20	000	22	200
	Dimension for 750	mm	2200*11	40*1500	2200*11	40*1500	2200*11	40*1550	2200*11	40*1650	2200*11	40*1750	2200*11	140*1850
	Dimension for 1000	mm	2400*11	40*1500	2400*11	40*1500	2400*11	40*1550	2400*11	40*1650	2400*11	40*1750	2400*11	140*1850
	Dimension for 1500	mm	2900*11	40*1500	2900*11	40*1500	2900*11	40*1550	2900*11	40*1650	2900*11	40*1750	2900*11	140*1850
Overall dimensio	Dimension for 2000	mm	3400*11	40*1500	3400*11	40*1500	3400*11	40*1550	3400*11	40*1650	3400*11	40*1750	3400*11	140*1850
	Dimension for 3000	mm	4400*11	40*1500	4400*11	40*1500	4400*11	40*1550	4400*11	40*1650	4400*11	40*1750	4400*11	140*1850

NC LATHE





Lathe Machine

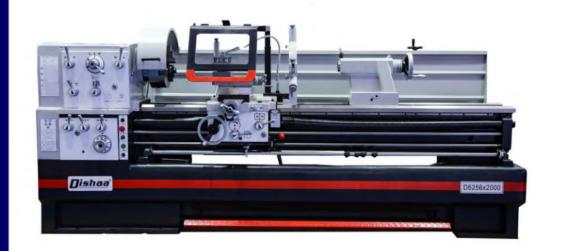

SPECIFICATIONS	Units	DS6246	DS6256
Swing over bed	mm	460	560
Swing over cross slide	mm	270	355
Distance between centers	mm	1000/1500/2000/3000	1000/1500/2000/3000
Spindle bore	mm	58	80
Spindle bore taper	-	No. of Morse 6	No. of Morse 7
Spindle nose		D1-6	D1-8
Spindle speed range	rpm	12 changes, 25-2000r/min	12 changes, 25-1600r/min
Cross slide travel	mm	285	316
Top tool post travel	mm	75	75
Longitudinal feeds range	mm/r	42 Kinds, 0.031-1.7mm/rev	35 kinds, 0.059-1.646mm/rev
Cross feeds range	mm/r	42 Kinds, 0.014-0.784mm/rev	42 Kinds, 0.020-0.573mm/rev
Main motor power	PH	5.5kW 3PH	7.5kW 3PH
Net Weight	kg	1645/1810/1965	2195/2285/2560/2930
Gross Weight	kg	1910/2115/2295	2600/2690/2980/3410
	cm	220*108*137	239*115*146
	cm	275*108*137	284*115*146
Overall dimension	cm	325*108*137	334*115*146

Lathe machine

DL6140 / DL6150 / DL6161 DL6106 / DL6180

Lathe Machine



SPECIFICATIONS		Units	DL6140 DL6140E	DL6240 DL6240B	DL6150B DL6150B DL6150C	DL6250 DL6250B DL6250C	DL6161 DL6161B DL6161C	DL6261 DL6261B DL6261C	DL6166B DL6166C	DL6266 DL6266B DL6266C	DL6180 DL6180B DL6180C	DL6280 DL62806 DL62806
Swing over bed		mm	400)mm	500	Omm	610	mm (660	mm	800	mm
Swing over cross slide		mm	210)mm	300)mm	370	mm (400	mm	540	mm
Swing over gap		mm	-	630	-	720	-	830		880	-	102
Gap length				210		210	-	210		210	-	210
Distance between cente	ers	mm				750/	1000/1500	/2000/220	0/3000/40	00		
Spindle bore		mm				53	2 B:80	C:1	05			
Spindle bore taper		-										
Spindle speed steps		steps		24		24	2	24	- 7	4	2	4
Spindle speed range		rpm	10-1400	/16-1400	10-1400	/16-1400	10-1400	/16-1400	10-1400	/16-1400	10-1400	/16-140
Cross slide travel		mm	3	20	3	20	3.	20	3	20	33	20
Top tool post travel		mm	1	40	1	40	1	40	1	40	14	40
Tool size		mm	25	*25	25	*25	25	*25	25	*25	25	*25
Longitudinal feeds kind	s	kinds	(54	(64	6	54		4	6	4
Longitudinal feeds rang		mm/r	0.02	8-6.33	0.02	8-6.33	0.028	8-6.33	0.028	3-6.33	0.028	3-6.33
Cross feeds range kinds		kinds		54	(54	6	54	- 6	4	6	4
Cross feeds range		mm/r	0.01	4-3.16	0.014	4-3.16	0.014-3.16		0.014-3.16			
Longitudinal fast movin	g	m/min		4	4		4		4		4	
Cross fast moving	*	m/min		2		2		2		2		2
Kinds of metric threads		kinds		14	4	44	4	14	- 4	14	4	14
Range of metric thread:	s	mm	1-	192	1-	192	1-1	192	1-	192	1-1	192
Kinds of inch threads	A.11	kinds		21	- 7	21	2	21	- 7	1	2	1
Range of inch threads		T.P.I.	2	-24	2-	-24	2-	24	2-	24	2-	24
Kinds of threads modul	e	kinds	1	39	3	39	3	39	3	19	3	19
Range of threads modu	le .	MP	0.2	5-48	0.2	5-48	0.2	5-48	0.2	5-48	0.25	5-48
Kinds of threads hreads of	diametral	kinds	1	37	- 3	37	3	37	3	7	3	37
Range of threads hreads	diametral	DP	1	96	1-	-96	1-	96	1-	96	1-	96
Tailstock quill diameter		mm	1	75	7	75	7	75	7	'5	7	75
Tailstock quill taper		-	N	IT5	N	1T5	M	IT5	M	T5	M	T5
Tailstock quill travel		mm	1	50	1	.50	1	50	1	50	15	50
Main motor power		kw	7	.5	7	7.5	7	.5	1	1	1	1
Coolant motor power		kw	0	.09	0.	.09	0.	09	0.	09	0.	09
	Weight for 750	kg	20	000	21	100	22	200	23	00	24	100
	Weight for 1000	kg	2:	100	22	200	23	300	25	00	26	70
	Weight for 1500	kg	23	300	24	400	25	500	27	00	29	20
	Weight for 2000	kg	26	500	27	700	28	300	29	000	31	70
Machine weight	Weight for 2200	kg	2	700	28	800	30	000	32	200	33	100
	Weight for 3000	kg	33	300	35	500	37	700	39	000	41	.00
	Weight for 4000	kg	38	300	40	000	42	200	44	20	46	600
	Dimension for 750	mm	2440*1	150*1600	2440*11	150*1700	2440*11	50*1800	2440*11	50*1860	2440*11	50*200
	Dimension for 1000	mm	2650*1	150*1600	2650*11	150*1700	_	50*1800	-	50*1860	2650*11	50*2000
	Dimension for 1500	mm	3150*1	150*1600	3150*11	150*1700	3150*11	50*1800	3150*11	50*1860	3150*11	50*200
	Dimension for 2000	mm	3650*1	150*1600	3650*11	150*1700	3650*11	50*1800	3650*11	50*1860	3650*11	50*200
Overall dimension	Dimension for 2200	mm		150*1600		150*1700		50*1800		50*1860	4030*11	
	Dimension for 3000	mm	4800*1	150*1600	4800*11	150*1700	4800*11	50*1800	4800*11	50*1860	4800*11	50*2000
	Dimension for 4000	mm	5680*1	150*1600	5680*11	150*1700	5680*11	50*1800	5680*11	50*1860	5680*11	50*2000

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

NC LATHE





Lathe Machine DS6140 / DS6240 / DS6140J / DS6150B / DS6250B

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Main features

- 1) Spindle thru-hole is Φ 82mm, for machine with letter B in its
- 2) Spindle thru-hole is Φ105mm, for machine with letter C in it
- 3)The suffix with J is an energy-saving machine tool
- 4) The second number 1 in the designation stands for general horizontal bed.
- 5) The second number 2 in the designation stands for horizontal gap bed.
- 6) Five length of machine is available: 750mm, 1000mm, 1500mm, 2000mm and



Technical Parameters

		Parameters						
Item	Unit	DS6140 DS6240	DS6140J	DS6150B DS6250B	DS6166B DS6266B			
flax. swing over bed	mm	Ф400	Ф400	Ф500	Ф660			
Max. swing over slide	mm	Ф220	Ф220	Ф300	Ф420			
flax. workpiece length	mm	750/1000/1500/2000/3000	700/950/1450/1950/2950	750/1000/1500/2000/3000	750/1000/1500/2000/3000			
Spindle nose		ISO 702/II No.6	bayonet type;	ISO 702/II No.8 short	cam-lock type			
Spindle thru-hole	mm	Ф52	Ф52	Ф82	Φ82			
Spindle speeds	r/min		24 STEPS 9-1600r/min					
Tool section	mm	25×25	25×25	25×25	25×25			
Max. travel of compound rest	mm	145	145	145	145			
Max. travel of cross slide	mm	320	320	320	310			
fallstock quill diameter/ Max, travel of quill	mm	75/150	75/150	75/150	75/150			
Diametric pitch threads	MT	5	5	5	5			
Spindle motor power	kW	7.5	7.5	7.5	7.5			

Lathe Machine DS6140C / DS6150C / DS6240C / DS6250C DS6166C / DS6266C









Technical Parameters

Item	Unit
Max. swing over bed	mm
Max. swing over slide	mm
Max. workpiece length	mm
Spindle nose	
Spindle thru-hole	mm
Spindle speeds	r/min
Tool section	mm
Max. travel of compound rest	mm
Max. travel of cross slide	mm
Tailstock quill diameter/ Max, travel of quill	mm
Diametric pitch threads	MT
Spindle motor power	kW

Paran	neters
DS6140C / DS6150C DS6240C / DS6250C	DS6166C DS6266C
Ф400/Ф500	Ф660
Ф220/Ф300	Ф420
750/1000/1500/2000/3000	750/1000/1500/2000/3000
ISO 702/II No.8	short cam-lock type
Ф105	Ф105
12 STEPS 36-1600 r/min	12 STEPS 36-1600 r/min
25×25	25×25
145	145
320	310
75/150	75/150
5	5
7.5	7.5

www.dishaagroup.com





Lathe Machine DQ6280B / DQ6280C






Technical Parameters

**	Unit	Param	eters			
Item		DQ6280B	DQ6280C			
Swing over bed	mm	Φ8	800			
Swing over slide	mm	Φ5	580			
Max, workpiece length	mm	2000,	2000/3000			
Spindle nose		ISO 702/ NO.8 (cam-lock)				
Spindle thro-hole	mm	Ф82	Ф105			
Spindle speed	r/min	24 steps 8-1400rpm	12 steps 30-1400rpm			
Tool section	mm	25:	×25			
Max, travel of compound rest	mm	14	45			
Max. travel of cross slide	mm	320				
Tailstock quill diameter /travel	mm	Ф90/150				
Taper of quill	mm	5				
Spindle power	kW	7	7.5			

Lathe Machine D6163B / D6180A / D62663B / D6280B

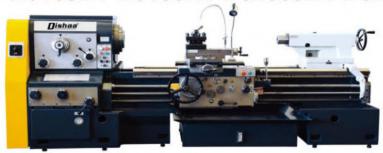

- 1) Suitable for various cuttings, such as ID and OD turning, taper turning, other revolving surfaces turning, facing, threading of metric, inch, module and DP threads, drilling, reaming, tapping and slot cutting, etc.
- 2) Three length of machine is available: 1500mm, 2000mm, 3000mm and 4000mm.







34	Limite	Parameters				
Items	Unit	D6163B	D6180A	D6263B	D6280B	
Max. swing over bed	mm	Ф660	Ф830	Ф660	Ф830	
Max. swing over slide	mm	Φ400	Ф540	Ф400	Ф540	
Max. workpiece length	mm	1500/2000	/3000/4000	1500	1500	
Spindle nose		A1-11		A1-11	A1-11	
Spindle thru-hole	mm	Ф105		Ф105	Ф105	
Spindle speed	r/min	14 steps 12.5~1120 rpm		14 steps 12.5~1120 rpm	14 steps 12.5~1120 rpn	
Tool section	mm	32X	32	32X32	32X32	
Max. travel of compound rest	mm	20	0	200	200	
Max. travel of cross slide	mm	480	515	480	515	
fallstock quill diameter/ Max. travel of quill	mm	Ф100/250		Ф100/250	Ф100/250	
Diametric pitch threads	MT	5		5	5	
Spindle motor power	kW	11		11	11	






Lathe Machine



SPECIFICATIONS	S	Units	DW6163E DW6263E	DW6180E DW6280E	DW6180F DW6280F	DW61100F DW62100
Swing over bed		mm	630	800	800	1000
Swing over gap		mm	- 800	- 1000	- 1000	- 1200
Swing over cross slide		mm	350	520	480	680
Distance between center	3	mm		1500/2000/3000	/4000/5000/6000	
Guideway width	7	mm	550	550	600	600
Max. load capacity		T	3	3	4	4
Spindle bore		mm	104	104	104	104
Spindle bore taper			Metric120/MT5	Metric120/MT5	Metric120/MT5	Metric120/MT5
Spindle nose type			C11	C11	C11	C11
Spindle speed steps		steps	18	18	18	18
Spindle speed range		rpm	7.5-1000	6-800	5.4-720	5.4-720
Chuck		mm	315 Manual 3-jaw	315 Manual 3-jaw	400 Manual 3-jaw	400 Manual 3-jaw
Tool size		mm	30*30	30*30	32*32	32*32
X axis travel		mm	320	420	420	420
Z axis travel		mm	1000	1350/1850/2850	/3850/4850/5850	
X axis feed steps /range		mm/r	64/0.05-12.15	64/0.05-12.15	64/0.05-12.15	64/0.05-12.15
Z axis feed steps /range			64/0.1-24.3	64/0.1-24.3	64/0.1-24.3	64/0.1-24.3
X axis rapid traverse		mm/min	2300	2300	2300	2300
Z axis rapid traverse		mm/min	4000	4000	4000	4000
Metric thread kinds /rang	ge	mm	50/1-240	50/1-240	50/1-240	50/1-240
Inch thread kinds /range	-	T.P.I	26/14-1	26/14-1	26/14-1	26/14-1
Module thread kinds /rar	nge	mm	53/0.5-120	53/0.5-120	53/0.5-120	53/0.5-120
DP thread kinds /range	0	D.P.	24/28-1	24/28-1	24/28-1	24/28-1
Tailstock guill diameter		mm	100	100	120	120
Tailstock quill taper			MT5	MT5	MT6	MT6
Tailstock guill travel		mm	250	250	250	250
Main motor power		kw	11	11	11	11
Rapid traverse motor pov	wer	kw	1.1	1.1	1.1	1.1
Coolant motor power		kw	0.125	0.125	0.125	0.125
	Weight for 1500	kg	3800	4100	5000	5300
	Weight for 2000	kg	4200	4500	5400	5700
	Weight for 3000	kg	4900	5200	6100	6400
Machine weight	Weight for 4000	kg	5600	5900	6800	7100
moenine weight	Weight for 5000	kg	6300	6600	7500	7800
	Weight for 6000	kg	7000	7300	8200	8500
	Dimension for 1500	mm	3800*1400*1450	3800*1500*1450	4000*1550*1650	4000*1750*1750
	Dimension for 2000	mm	4300*1400*1450	4300*1500*1450	4500*1550*1650	4500*1750*1750
	Dimension for 3000	mm	5300*1400*1450	5300*1500*1450	5500*1550*1650	5500*1750*1750
Overall dimension	Dimension for 4000	mm	6300*1400*1450	6300*1500*1450	6500*1550*1650	6500*1750*1750
Acted difficultion	Dimension for 5000	mm	7300*1400*1450	7300*1500*1450	7500*1550*1650	7500*1750*1750
	Dimension for 6000	mm	8300*1400*1450	8300*1500*1450	8500*1550*1650	8500*1750*1750

DW6100L / DW6125L DW6140L / DW6160L

Heavy Duty Lathe

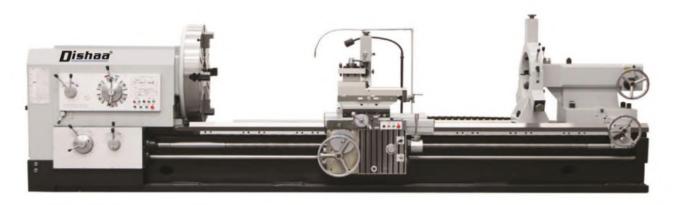

SPECIFICATIONS		Units	DW61100L	DW61125L	DW61140L	DW61160L
Swing over bed		mm	1000	1250	1400	1600
Swing over cross slide		mm	610	850	1000	1200
Distance between centers	s	mm		1500/2000/3000/	4000/5000/6000	- 1.77
Guideway width		mm	755	755	755	755
Max. load capacity		T	6	6	6	6
Spindle bore		mm	130	130	130	130
Spindle bore taper			Metric140/MT6	Metric140/MT6	Metric140/MT6	Metric140/MT
Spindle nose type		-	A2-15	A2-15	A2-15	A2-15
Spindle speed steps		steps	21	21	21	21
Spindle speed range		rpm	3.15-315	3.15-315	3.15-315	3.15-315
Chuck		mm	1000 Manual 4-jaw	1000 Manual 4-jaw	1000 Manual 4-jaw	1000 Manual 4-jaw
Tool size		mm	45*45	45*45	45*45	45*45
X axis trave		mm	520	620	620	620
Z axis travel		mm		3850/4850/5850		
X axis feed steps /range		mm/r	56/0.05-6	56/0.05-6	56/0.05-6	56/0.05-6
Z axis feed steps /range		mm/r	56/0.1-12	56/0.1-12	56/0.1-12	56/0.1-12
X axis rapid traverse		mm/min	1870	1870	1870	1870
Z axis rapid traverse		mm/min	3740	3740	3740	3740
Metric thread kinds /range		mm	44/1-120	44/1-120	44/1-120	44/1-120
Inch thread kinds /range		T.P.I	31/28-3/8	31/28-3/8	31/28-3/8	31/28-3/8
Module thread kinds /range		mm	45/0.5-60	45/0.5-60	45/0.5-60	45/0.5-60
DP thread kinds /range	7	D.P.	30/56-1	30/56-1	30/56-1	30/56-1
Tailstock quill diameter		mm	ф160	ф160	ф160	ф160
Tailstock quill taper			MT6	MT6	MT6	MT6
Tailstock quill travel		mm	300	300	300	300
Main motor power		kw	22	22	22	22
Rapid traverse motor pow	/er	kw	1.5	1.5	1.5	1.5
Coolant motor power		kw	0.125	0.125	0.125	0.125
	Weight for 1500	kg	9600	10600	11200	13100
	Weight for 2000	kg	10100	11100	11700	13600
	Weight for 3000	kg	10700	11700	12300	14200
Machine weight	Weight for 4000	kg	11700	12700	13300	15200
	Weight for 5000	kg	12700	13700	14300	16200
	Weight for 6000	kg	13700	14700	15300	17200
	Dimension for 1500	mm	4600*2000*1800	4600*2000*1950	4600*2250*2050	4600*2250*2150
	Dimension for 2000	mm	5100*2000*1800	5100*2000*1950	5100*2250*2050	5100*2250*2150
	Dimension for 3000	mm	6100*2000*1800	6100*2000*1950	6100*2250*2050	6100*2250*2150
Overall dimension	Dimension for 4000	mm	7100*2000*1800	7100*2000*1950	7100*2250*2050	7100*2250*2150
	Dimension for 5000	mm	8100*2000*1800	8100*2000*1950	8100*2250*2050	8100*2250*2150
	Dimension for 6000	mm	9100*2000*1800	9100*2000*1950	9100*2250*2050	9100*2250*2150





Lathe Machine

D1313 / D1319 / D1322 D1325 / D1327


Pipe Threading Lathe Machine



SPECIFICATION	S	Units	D1313	D1319	D1322	D1325	D1327
Swing over bed		mm	630/800	630/800	630/800	800	800
Swing over cross slide		mm	340/520	340/520	340/520	480	480
Distance between cen	ters	mm	1500/3000	1500/3000	1500/3000	1500/3000	1500/3000
Pipe threading range		mm	30-126	50-193	50-220	120-250	130-270
Guideway width		mm	550	550	550	600	600
Max. load capacity		kg	3000	3000	3000	4000	4000
Spindle bore		mm	130	200	230	255	280
Spindle speed steps		steps	18	4	4	4	4
Spindle speed range		rpm	30-650	20-550	20-550	20-420	20-420
Church			400	520	520	630	630
Chuck		mm	manual/3-jaw	manual/4-jaw	manual/4-jaw	manual/4-jaw	manual/3-jaw
Tool shank size		mm	30*30	32*32	32*32	32*32	32*32
X axis travel		mm	320/420	320/420	320/420	420	420
Z axis travel		mm	1350/2850	1350/2850	1350/2850	1350/2850	1350/2850
X axis feed steps/range	1	mm/r	22/0.02-0.45	22/0.02-0.45	22/0.02-0.45	22/0.02-0.45	22/0.02-0.45
Z axis feed steps/range		mm/r	26/0.07-1.33	26/0.07-1.33	26/0.07-1.33	26/0.07-1.33	26/0.07-1.33
X axis rapid traverse		mm/min	2300	2300	2300	2300	2300
Z axis rapid traverse		mm/min	4000	4000	4000	4000	4000
Metric thread kinds /ra	ange	mm	52/1-24	1-15	1-15	1-15	1-15
Inch thread kinds /rang	ge	T.P.I	40/28-2	14-1	14-1	14-1	14-1
Tailstock quill diameter	r	mm	100	100	100	120	120
Tailstock quill taper			MT5	MT5	MT5	MT6	MT6
Tailstock quill travel		mm	250	250	250	250	250
Main motor power		kw	11	11	11	15	15
Rapid traverse motor		kw	0.3	0.3	0.3	1.1	1.1
Coolant motor power		kw	0.125	0.125	0.125	0.125	0.125
	Weight for 1500	kg	4000	4300	4500	8000	8000
Machine weight	Weight for 3000	kg	5200	5500	5700	9000	9000
	Dimension for 1500	mm	3700*1500*1500	3700*1550*1550	3700*1650*1550	4100*1700*1600	4100*1700*160
Overall dimension	Dimension for 3000	mm	5200*1500*1500	5200*1550*1550	5200*1650*1550	5600*1700*1600	5600*1700*160

D1327 / D1332 / D1338 D1343 / D1350

Pipe Threading Lathe Machine

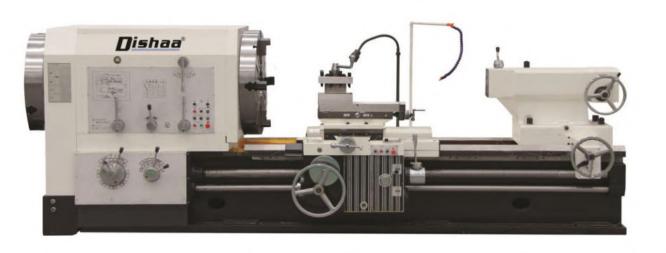

SPECIFICATION	S	Units	D1327	D1332	D1338	D1343	D1350
Swing over bed		mm	1000	1000	1000	1000	1200
Swing over cross slide		mm	610	610	610	610	710
Distance between cen	iters	mm	1500/3000	1500/3000	1500/3000	1500/3000	1500/3000
Pipe threading range		mm	130-270	190-320	190-380	270-430	330-510
Guideway width		mm	755	755	755	755	755
Max. load capacity		kg	6000	6000	6000	6000	6000
Spindle bore		mm	280	330	390	440	520
Spindle speed steps			12	9	9	9	9
Spindle speed range		rpm	16-380	7.5-280	6-205	4.9-180	4.9-180
Chuck		mm	800	780	850	1000	1000
Lnuck		min	Manual 4-jaw	Electric 4-jaw	Electric 4-jaw	Electric 4-jaw	Electric 4-jaw
Tool size		mm	45*45	45*45	45*45	45*45	45*45
X axis travel		mm	520	520	520	520	520
Z axis travel		mm	1350/2850	1350/2850	1350/2850	1350/2850	1350/2850
X axis feed steps /rang	e	mm/r	40/0.05-1.5	32/0.05-0.75	32/0.05-0.75	32/0.05-0.75	32/0.05-0.75
Z axis feed steps /rang	ė	mm/r	40/0.1-3.0	32/0.1-1.5	32/0.1-1.5	32/0.1-1.5	32/0.1-1.5
X axis rapid traverse		mm/min	1870	1870	1870	1870	1870
Z axis rapid traverse		mm/min	3740	3740	3740	3740	3740
Metric thread kinds /ra	ange	mm	30/1-30	23/1-15	23/1-15	23/1-15	23/1-15
Inch thread kinds /ran	ge	T.P.I	27/28-1	22/28-2	22/28-2	22/28-2	22/28-2
Tailstock quill diamete	r	mm	160	160	160	160	160
Tailstock quill taper		(+)	MT6	MT6	MT6	MT6	MT6
Tailstock quill travel		mm	300	300	300	300	300
Main motor power		kw	22	22	22	22	22
Rapid traverse motor		kw	1.5	1.5	1.5	1.5	1.5
Coolant motor power		kw	0.125	0.125	0.125	0.125	0.125
	Weight for 1500	kg	10000	11500	12800	13000	15000
Machine weight	Weight for 3000	kg	11500	13000	14300	14500	16500
	Dimension for 1500	mm	4800*2100*1600	4900*2100*1650	4900*2100*1700	5000*2100*1700	5000*2100*185
Overall dimension	Dimension for 3000	mm	6300*2100*1600	6400*2100*1650	6400*2100*1700	6500*2100*1700	6500*2100*185





DCK6152E / DCK6165E / DCK6185E

CNC Lathe Machine



Usage

Controued by NC system, this machine could process different inner bore, ex-circle, circular conical surface and screw thread, especially suitable for the small and middle-sized shaft and plate work piece from rough processing to finish processing in batch. It has advantages like higher automaticity, simpler programming and higher accuracy.




Features

- 1. Higher stability one-piece machine bed
- 2. 3-gear spindle speed, step-less in gear
- 3. Higher rigidity base
- 4. Wider slide carriage
- 5. Integrated automatic lubrication system









Specifications	Unit	DCK6152E	DCK6165E	DCK6185E
Max. swing dia. over bed	mm	530	650	850
Max. swing dia. over slide	mm	280	375	500
Maximum turning diameter (disc)	mm	520	650	850
Max.work piece lenth	mm	1000/1500/2000/3000	1000/1500/2000/3000	1000/1500/2000/3000/4000
Maximum turning length	mm	825/1325/1825/2825	900/1400/1900/2900	900/1400/1900/2900/3900
Spindle nose		A2-8	C11	C11
spindle bore	φ/mm	90	105	105
Spindle taper	φ/mm	100/1: 20	120/1: 20	120/1: 20
Spindle speed	r/min	30-150,90-450,315-1600	10-85,40-350,100-850	10-85,40-350,100-850
Spindle shift mode		Three speed mechanical tr	ansmission, stepless speed regulation	on within the gear
Spindle motor power	KW	7.5	11	11
Chuck type		Manual Chuck	Manual Chuck	Manual Chuck
Chuck size	mm	250	320	400
X axis rapid traverse	m/min	6	4	4
Z axis rapid traverse	m/min	8	5	5
X axis servo motor torque	N.m	7.5	10	10
Z axis servo motor torque	N.m	10/15/22	15/22/30	15/22/30
X axis travel	mm	300	400	450
Z axis travel	mm	1000/1500/2000/3000	1100/1600/2100/3100	1100/1600/2100/3100/4100
Guide way type		Hard rail	Hard rail	Hard rail
Capacity of tool post		4	4	4
Tool shank size	mmxmm	25×25	32×32	32×32
Tail stock quill dia	φ/mm	75	100	100
Tail stock quill travel	mm	150	250	250
Tail stock quill taper		MT5#	MT6#	MT6#
Total rated power	KW	12/12/13	16/18/20	16/18/20
Total rated current	Α	26/26/28	36/40/42	36/38/42
Net weight	kg	2900/3150/3500/4300	4000/4400/5000/5800	4200/4600/5200/6000/6700
Machine dimension(L×W×H)	LxWxH(mm)	2600/3100/3600/4800×1600×1670	3300/3800/4300/5300X1900X1900	3300/3800/4300/4800/5800X2000X2000

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

CNC LATHE





DCK6140 / DCK6150 / DVCK6160

CNC Lathe Machine












COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Usage

Machine tool can automatically process the inside and outside cylinder surface, cone surface, circular arc surface, end face, such as processing, and also can process the single and multiple threads in metric, inch and other standards.

Features

- 1. The higher strength base and the widening slide are suitable for heavy cutting
- 2. Four position electric turret
- 3. Variable frequency speed
- 4. Standard configuration: manual chuck
- 5.Optional configuration: hydraulic chuck







pecifications	Unit	DCK6140	DCK6150	DCK6160
Max. swing dia. over bed	mm	400	500	600
Max. swing dia. over slide	mm	240	250	395
Maximum turning diameter (disc)	mm	400	500	600
Max. work piece length	mm	550/750	1000/1500/2000	1000/1500/2000
Maximum turning length	mm	420/620	850/1350/1850	850/1350/1850
Spindle nose		A2-6/A2-8	A2-8/A2-11	A2-8/A2-11
spindle bore	φ/mm	48/82	82/130	82/130
Spindle taper	φ/mm	Chuck / 90	90/140	90/140
Spindle speed	r/min	150-2500/150-1800	150-1800/150-800	150-1800/150-800
Spindle type		Steple	ss speed regulation	
Spindle motor power	KW	5.5/7.5	7.5/11	7.5/11
Chuck type		Manual Chuck	Manual Chuck	Manual Chuck
Chuck size	mm	200/250	250/320/380	250/320/380
X axis rapid traverse	m/min	6	6	6
Z axis rapid traverse	m/min	8	8	8
X axis servo motor torque	N.m	4	5/7.5	5/7.5
Z axis servo motor torque	N.m	6	7.5/10/15	7.5/10/15
X axis travel	mm	280	280	325
Z axis travel	mm	550/750	1000/1500/2000	1000/1500/2000
Guide way type		Hard rail	Hard rail	Hard Rail
Capacity of tool post		4	4	4
Tool shank size	mmxmm	20×20	25×25	25×25
Tail stock quill dia	φ/mm	60	75	75
Tail stock quill travel	mm	100	150	150
Tail stock quill taper		MT4#	MT5#	MT5#
Total rated power	KW	8/10	11/12/13	11/12/13
Total rated current	A	17/21	23/26/29	23/26/29
Net weight	kg	1900/2200	2700/3100/3500	2800/3200/3400
Machine dimension(L×W×H)	LxWxH(mm)	2000/2200×1600×1800	2650/3250/3750×1700×1820	2650/3250/3750×1700×182

CNC LATHE





DCK61100E / DCK61125E

CNC Lathe Machine

Usage

This machine tool is suitable to process the middle and large size work piece in steel, cast iron, non-ferrous metal material.

With the feature of big power and high rigidity, this machine is applied to heavy-cut the inner circle, ex-circle, end surface and thread in both metric and English system, and could drill and bore the holes





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



Features

- 1. Higher stability one-piece machine bed
- 2. 3-gear sprindle speed, step-less in gear
- 3. Higher rigidity base
- 4. Wider slide carriage
- 5. Integrated automatic lubrication system

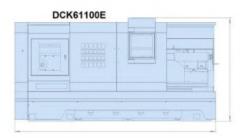

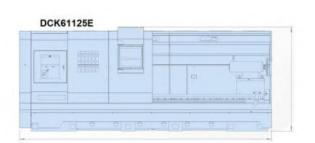

Specifications	Unit	DCK61100E	DCK61125E
Max. swing dia. over bed	mm	1000	1250
Max. swing dia. over slide	mm	650	850
Maximum turning diameter (disc)	mm	1000	1250
Max. work piece length	mm	1500/2000/3000/5000	1500/2000/3000/5000
Maximum turning length	mm	1400/1900/2900	1350/1850/2850
Spindle nose		A2-15	A2-15
spindle bore	φ/mm	130	130
Spindle taper	ф/mm	Metric 140/ 1:20	Metric 140/ 1:20
Spindle speed	r/min	10-60,40-240,100-600	10-50,40-120,100-300
Spindle shift mode		Three speed mechanical transmission, ste	pless speed regulation within the gear
Spindle motor power	KW	15	22
Chuck type		Manual Chuck	Manual Chuck
Chuck size	mm	500	600
X axis rapid traverse	m/min	4	4
Z axis rapid traverse	m/min	5	5
X axis servo motor torque	N.m	10	15
Z axis servo motor torque	N.m	15/22/30	18/22/30
X axis travel	mm	530	650
Z axis travel	mm	1500/2000/3000	1350/1850/2850
Guide way type		Hard rail	Hard rail
Capacity of tool post		4	4
Tool shank size	mmxmm	40X40	40X40
Tail stock quill dia	φ/mm	140	160
Tail stock quill travel	mm	250	250
Tail stock quill taper		MT6#	MT6#
Total rated power	KW	22/23/25	29/30/30
Total rated current	A	47/50/54	62/65/65
Net weight	kg	5000/5500/6300	8500/9000/10600
Machine dimension(L×W×H)	LxWxH(mm)	4100/4600/5600×2160×2200	4100/4600/5600×2355×2425

110





DH32i / DCK6340 / DCK6340S / DCK6350

CNC Lathe Machine



This machine is mainly used for processing various shaft, disk parts, turning can be all kinds of screw thread, arc, cone and plane of internal and external surface, can satisfy the ferrous and nonferrous metals the speed requirement of high-speed chip. Suitable for cars, motorcycles, electronics, aerospace, military industry and other industries to high efficiency, large quantity and high precision of parts processing. Machining precision can reach level IT6.



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Features

- 1. Flat bed/45 degrees slant bed CNC lathe
- 2. High-precision Taiwan guide rail
- 3. Chip conveying capacity is large and convenient, customer could choose chip conveying in the right or in the back
- 4. Spindle unit has two types, the heavy cutting type and the high speed type. The second type is suitable for the high speed and high precision processing.
- 5. Screw pre-streching structure
- 6. Gang type toolas standard
- 7. Optional turret

DH32i	DCK6340	DCK6340S	DCK6350

Specifications	Unit	DH32i	DCK6340	DCK6340S	DCK6350
Max. swing dia. over bed	mm	320	400	400	520
Max. swing dia. over slide	mm	70	140	140	220
Max. processing length	mm	280			
Max. bar capacity	mm	39	39/44	39/44	44/54
Max. processing diameter (plate)	mm	320	400	400	500
Spindle nose	GB59001	A2-5	A2-5	A2-5	A2-6
spindle bore	φ/mm	48	48/56	48/56	66
Spindle speed	r/min	50-4000	50-3500	50-3500	50-3000
Spindle shift mode					
Spindle motor power	KW	3.7	5.5	5.5	7.5
Chuck type					
Chuck size	Inch	6	6/8	6/8	10
X axis rapid traverse	m/min	24	24	24	24
Z axis rapid traverse	m/min	24	24	24	24
X axis servo motor torque	N.m	4	6	6	7.5
Z axis servo motor torque	N.m	4	6	6	7.5
X axis travel	mm	280	400	400	500
Z axis travel	mm	330	300	400	500
Guide way type					
Tool post type					
Tool shank size	mm	20x20/Ø25	20x20/Ø25	20x20/Ø25	25x25/Ø32
Total rated power	KW	6	10	12	13
Total rated current	Α	13	21	26	28
Net weight	kg	1400	2300	2600	3000
Machine dimension(L×W×H)	(mm)	1620×1420×1700	2200×1530×1780	2390×1530×1780	2500×1620×1890





DCK36A / DCK46A / DCK50A

CNC Lathe Machine











The machine is suitable to process all kinds of small and middle-sized shaft and plate work piece, and could also turn various threads, circle arc, circular cone, inside and outside surface of revolved body. This machine is widely used in sanitary, valve, electrical appliance, instrument, automobile, motorcycle, bearings and so on.

Features

- 1. Higher accuracy Taiwan linear guideways
- 2. Higher speed spindle unit
- 3. Higher rigidity castings
- 4. Integrated automatic lubrication
- 5. One-piece casting bed and slant bed
- 6. Optional power turret







Specifications	Unit	DCK36A	DCK46A	DCK50A
Max. swing dia. over bed	mm	360	460	560
Max. swing dia. over slide	mm	140	260	300
Max. work piece length	mm	300	350	350/500/800/1250
Max. bar capacity	mm	38/44	44	55/75
Max. processing diameter (plate)	mm	360	440/360	440/360
Spindle nose	GB59001	A2-5	A2-5	A2-6/8
spindle bore	φ/mm	48/56	56	66/66/86
Spindle speed	r/min	50-4000	50-3500	0-3000
Spindle shift mode				
Spindle motor power	KW	5.5	7.5	11/11/15
Chuck type				
Chuck size	Inch	6	8	10
X axis rapid traverse	m/min	24	24	24
Z axis rapid traverse	m/min	24	24	24
X axis servo motor torque	N.m	6	7.5	10/15
Z axis servo motor torque	N.m	6	7.5	10/15
X axis travel	mm	185	240	240
Z axis travel	mm	350	400	400/540/860/1300
Guide way type				
turret type				
tool shank size	mm	20X20/Ø25	25x25/Ø32	25X25/Ø32
Tail stock type				
Tail stock quill dia	φ/mm	65	70	70/90
Tail stock quill travel	mm	60	80	80
Tail stock quill taper		MT4#	MT5#	MT5#
Total rated power	KW	9	11	14/18
Total rated current	Α	19	23	30
Net weight	kg	2500	3000	3200/3600/4500/5200
Machine dimension(L×W×H)	(mm)	2200×1636×1850	2500×1950×1950	2600/2700/3300/3750×2000×2000

114





DVTC500/ DVTC650/DVTC750 DVTC850/DVTC1000

CNC Vertical Lathe Machine



Standard configuration

- Taiwan HIWIN linear rails, ball screw
- · Taiwan hydraulic chuck
- · Taiwan spindle units (imported bearing)
- Taiwan turret
- Volumetric lubrication
- Cooling & Chipping

- · Worklamp; Three-color alarm light; Foot switch; Electric cabinet air conditioner
- Screw rail inner protection
- Full protective sheet metal cover; pneumatic sliding door
- · Equiped with hydraulic station
- CNC system: GSK980TDi

SPECIFICATIONS	Units	DVTC500	DVTC650	DVTC750	DVTC850	DVTC1000
Max. Swing dameter	mm	500	650	750	850	1000
Max. Turning diameter	mm	400	550	650	750	850
Spiridle nose type		A2-8	A2-8	A2-11	A2-11	A2-11
Diameter of spindle bearing	mm	120	120	180	180	180
Spiridle speed range	rpm	50-1250	50-1250	50-1000	30-800	30-800
Spindle output torque	nm	350	475	715	890	890
Chuck diameter		12"HYD	15" HYD	21"HYD	24" HYD	32" HYD
Turnet type		Hor.8	position	Hor 8 position	Ver,4 position	Ver.4 positio
Turret spec.		100	100	125	125	125
Tool size	mm	□25/φ40	□25/φ40	□32/φ50	□32/φ50	□32/φ50
Turret travel X axis	mm	-325	-375	-425	-500	-600
Turnet travel Z axis	mm	500	550	700	800	800
Distance from Bottom of turnet to up of druck	mm	0-500	0-550	0-700	0-800	0-800
X/Z linear rails		45 Roller	45 Roller	55 Roller	55 Roller	55 瀉柱Rolle
Diameter of K/Z screw	mm	ф40	ф40	ф50/ф40	ф50/ф40	ф50/ф40
X-axis rapid traverse	m/min	15	15	15	15	15
Z-axis rapid traverse	m/min	12	12	12	12	12
Cutting feeding	m/min	0.1-5000	0.1-5000	0,1-5000	0.1-5000	0.1-5000
axis motor power/torque	Kw/nm	1.6/10	2.4/15	2.4/15	2.8/18	3.5/22
axis motor power/torque	Kw/nm	2.4/15	2.4/15	2.8/18	3.5/22	3.5/22
tain motor power/tonque	Kw/nm	11/15-140	15/18.5- 190	22/30- 286	30/37-356	30/37-356
Nenif size (L*W*H)	m	1.8*1.8*2.5	1.95*1.85*2.65	2.3*2*3	2.5*2.25*3.15	2.6*2.35*3.1
Aschine weight	kg	4200	5200	7200	9500	10500

DVTC1250/DVTC1400 **DVTC1600**

CNC Vertical Lathe Machine



Standard configuration

Manual 4 jaw chuck, double -speed gear box

Specifications are subject to change without prior notice

- · Taiwan HIWIN linear rails ball screw
- Chain type chip conveyor
- CNC system : GSK980TDi
- Working light; Three-color alarm light; Foot switch; Electric cabinet air conditioner
- · Screw rail inner protection
- Nitrogen balance
- · Full protective sheet metal cover; pneumatic sliding door
- Equiped with hydraulic station

SPECIFICATIONS		DVTC1250	DVTC1400	DVTC1600
Max, Swing diameter	mm	1250	1400	1600
Max, Turning diameter	mm	1050	1250	1400
Spindle nose type		A2-11	A2-11	A2-15
Diameter of spindle bearing	mm	180	180	200
Spindle speed range	rpm	20-500 20-500 Double speed gearbox	20-400 20-400 Double speed gearbox	20-350 20-350 Double speed gearbo
Spindle output torque	nm	2100	2100	3000
Chuck diameter	*	ф1000 4-jaw manual	ф1250 4-jaw manual	ф1400 4-jaw manual
Turret type		Ver.4 position	Ver.4 position	Ver.4 position
Turret spec.		125	125	125
Tool size	mm	□32/φ50	□32/ф50	□32/φ50
Turret travel X axis	mm	-700	-800	-900
Turret travel Z axis	mm	800	800	800
Distance from Bottom of turnet to up of chuck	mm	150-950	150-950	150-950
X/Z linear rails		65/55 Roller	65/55 Roller	65 Roller
Diameter of X/Z screw	mm	ф50	ф50	ф63
X-axis rapid traverse	m/min	15	15	15
Z-axis rapid traverse	m/min	12	12	12
Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000
X axis motor power/torque	Kw/nm	3.5/22	3.5/22	4.7/30
Z axis motor power/torque	Kw/nm	3.5/22	4.7/30	4.7/30
Main motor power/torque	Kw/nm	22/30-210	22/30-210	30/37-286
Overall size (L*W*H)	m	2.7*2.85*3.25	2.8*2.95*3.25	3.0*3.0*3.25
Machine weight.	kg	12800	13800	15500





DVTC5050/DVTC6560/DVTC7570 DVTC8580/DVTC10085

CNC Vertical Lathe Machine



tandard configuration

- · Taiwan HIWIN linear rails. Ball screw
- Taiwan Hydraulic chuck
- · Taiwan spindle unite (imported bearing)
- Taiwan Turret
- Volumetric lubrication
- Cooling & Chipping
- · Chain type chip conveyor · Worklamp; Three-color alarm light; Foot switch; Electric cabinet air conditioner

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- Full protective sheet metal cover; pneumatic sliding door
- Equiped with Hydraulic station
- CNC system : GSK980TDi

DCK5112×H/3
DCK5120×H/8
DCK5126×H/8

DCK5116×H/5 DCK5123×H/8

CNC Vertical Lathe Machine



			0				SPECIFICATIONS	Units	DCK5112×H/3	DCK5116×H/5	DCK5120×H/8	DCK5123×H/8	DCK5126×
	Wells		(1115-2116-2)	111-10000		- 100 Color (100 Color	Max.turning dia	mm	1250	1600	2000	2300	2600
IFICATIONS wing diameter	Units	DVTC5050	DVTC6560	DVTC7570	DVTC8580	DVTC10085	Table diameter	mm	1000	1400	1800	2000	2250
lurning diameter	mm	500 400	650 550	750 650	850 750	900			1000/1200	1000/1100	1350/1400	1250/1500	1250/16
ose type	******	A2-8	A2-8	A2-11	A2-11	A2-11	Max.height of workpiece	mm	1000/1200	1000/1400	1250/1400	1350/1600	1350/16
f spindle bearing	mm	120	130	160	160	160	Max.weight of workpiece	t	3	5	8	8	8
peed range	rpm	50-1250	50-1500	50-1250	30-1000	30-800	Max.torque of table	kn.m	17	25	32	35	35
tput torque	nm	350	380	715	890	1178		-/	6.3-200	5-160	3.2-100	3.2-100	2-63
ulic chuck diameter		12	15	21	24	32	Spindle speed range(16steps)	r/min	6.3-200	2-100	3.2-100	3.2-100	2-0.
			Hor.8 position			Hor.8 /12 position	Maxcutting force of vertical tool holde	er kn	18	22	22	22	22
	mm	100	100	125	125	125	Range of tool feed	mm/min	0.1-500	0.1-500	0.1-500	0.1-500	0.1-5
	mm	□25/ф40	□25/ф40	::32/ф50	□32/ф50	□32/ф50	The second secon					V-1-7-1	
vel X axis	mm	-325	-375	-425	-475	-525	Horizontal travel of vertical tool holder	mm	700	915	1050	1180	138
ravel Z axis	mm	500	600	700	800	850	Vertical tool holder slide travel	mm	650	800	800	1000	100
om Bottom of turnet to up of chuc	k mm	0-500	0-600	0-700	0-800	0-850							
rapid traverse	m/min	15	15	15	15	15	Tool holder rapid traverse	mm/min	2500	3750	3750	3750	3750
rapid traverse	m/min	15	15	12	12	12	Elevating speed of cross beam	mm/min	440	440	440	440	440
feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000	0.1-5000	-	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			20.00	89.11	-
near rails		45 Roller	45 Roller	45 Roller	55 Roller	55 滚柱Roller	Tool shank size	mm	30×40	30×40	30×40	30×40	30×4
eter of XZ screw	mm	ф40	ф40	ф40	Φ50	Ф50	Main motor power	kw	22	30	30	30	37
otor power/torque	Kw/nm	1.6/10	2.4/15	2.8/18	2.8/18	3.5/22			2360*2300*3580	2800*270*3870	3200*2800*4000	3600*2850*4200	3900*29
motor power/torque	Kw/nm	2.4/15	2.8/18	2.8/18	3.5/22	3.5/22	Overall dimension(L*W*H)	mm	3860*2450*3580		5400*3400*4000	5600*3350*4000	
otor power/torque	Kw-nm	11/15-140	15/18.5- 190	22/30- 286	30/37-356	37/47-471	Machine weight(Appro.)	t	9/10.5	12/13.5	17/18.5	19/21	21/2
ill size (L*W*H)	m	1.8*1.85*2.7	2.15*2.18*2.85	2.25*2.35*3	2.3*2.4*3.2	2.5*2.6*3.4							

11800





CK5112T/CK5116T CK5120T/CK5125T

CNC Vertical Lathe Machine

Standard configuration

- Taiwan HIWIN linear rails, ball screw
- Hard rails with Italian plastic tape
- Taiwan TCSM slanted 8 degree turret
- Chain type chip conveyor
- Short taper heavy-duty spindle structure
- Italian two-speed gearbox with large and small gears to reduce speed
- High speed , high precision



SPECIFICATIONS	Units	CK5112T	CK5116T	CK5120T	CK5125T
Max. Swing diameter	mm	1400	1600	2000	2500
Max. Turning diameter	mm	1250	1600	2000	2500
Max.turning height	mm	1000	1000	1000	1200
Worktable diameter	mm	1000	1400	1800	2250
Worktable load	kg	4000	6000	8000	8000
Spindle speed range (two-speed motor)	rpm	5-400	2.5-315	2.5-250	3-200
Spindle output torque	nm	8000	12500	20000	20000
Turret type			4station		
Turret spec.	mm	320	320	320	320
Tool size	mm	□40/φ80	□40/φ80	□40/φ80	□40/ф80
Turret travel X axis	mm	-50-650	-50-1000	-50-1200	-50-1400
Turret travel Z axis	mm	650	650	650	650
Cross beam lifting stroke	mm	700	700	700	700
X-axis rapid traverse	m/min	15	15	15	15
Z-axis rapid traverse	m/min	12	12	12	12
Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000
X/Z axis linear rail + hard rail			55/45 Roller guide + h	nard guide	
Main motor power/torque	kw-nm	22/30-210	22/30-210	30/37-286	30/37-286
Overall size (L*W*H)	m	3.8*2.8*3.5	4.2*3*3.5	4.6*3.5*3.5	4.8*3.6*3.8
Machine weight	kg	13800	16500	18500	20800



- Taiwan HIWIN ball screw
- Slid rails with Italian plastic tape
- Taiwan square ram
- Chain type chip conveyor
- Short taper heavy-duty spindle structure
- Italian two-speed gearbox with large and small gears to reduce speed
- High speed , high precision

Max. Swing diameter Max. Turning diameter Max.turning height Worktable diameter	mm mm	1400	1600	2000	-0.000				
Max.turning height	2000	1250		2000	2500				
	JONES TO	1250	1600	2000	2500				
Varlatable diameter	mm	1000	1000	1000	1200				
vorktable diarrieter	mm	1000	1400	1800	2250				
Vorktable load	kg	4000	6000	8000	10000				
pindle speed range(two-speed motor)	rpm	5-400	2.5-315	2.5-250	3-200				
pindle output torque	nm	8000	12500	20000	20000				
urret type			Square	ram Gang type too	ol .				
urret spec.	mm		Ram section200*200						
ool size	mm	□40	□40	□40	□40				
urret travel X axis	mm	-50-650	-50-1000	-50-1200	-50-1400				
urret travel Z axis	mm	1000	1000	1000	1000				
Cross beam lifting stroke	mm	800	800	800	800				
(-axis rapid traverse	m/min	12	12	12	12				
-axis rapid traverse	m/min	12	12	12	12				
Cutting feeding	m/min	0.1-5000	0.1-5000	0.1-5000	0.1-5000				
//Z axis linear rail + hard rail		Hard guide	Hard guide	Hard guide	Hard guide				
Main motor power/torque	kw-nm	22/30-210	22/30-210	22/30-210	30/37-286				
Overall size (L*W*H)	m	3.5*2.6*3.7	4*2.8*3.7	4.6*3.5*3.7	4.8*3.6*3.8				
Machine weight	kg	12500	14500	18500	20800				





DCK5225×H/20 DCK5240×H/20 DCK5250×H/40 DCK5232×H/20 DCK5240×H/32 DCK5250×H/65

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

CNC Vertical Lathe Machine



SPECIFICATIONS	Units	DCK5225 ×H/20	DCK5232 ×H/20	DCK5240 ×H/20	DCK5240 ×H/32	DCK5250 ×H/40	DCK5250 ×H/65
Max.turning diameter	mm	2500	3200	4000	4000	5000	5000
Table diameter	mm	2250	2500	2830	3200	4000	4500
Max.height of workpiece	mm	1600/2000	1600/2000	2000/2500	2000/2500	2500/3150	2500/3150
Max.weight of workpiece	t	20	20	20	32	40	65
Max.torque of table	kn.m	63	63	63	70	80	100
Spindle speed range	r/min	2-63	2-63	2-63	0.42-42	0.42-42	0.42-42
Max. cutting force of vertical tool ho	lder kn	30	35	35	40	50	60
Range of tool feed	mm/min	0.2-145	0.2-145	0.2-145	0.2-145	0.2-145	0.2-145
Horizontal travel of vertical tool hold	ler mm	1400	1750	2150	2150	2765	2765
Vertical tool holder slide trave	mm	1000	1250	1250	1250	1250/1600	1250/1600
Tool holder rapid traverse	mm/min	3500	3500	3500	3500	3500	3500
Tool shank size	mm	40*50	40*50	40*50	50*50	50*50	50*50
Main motor power	kw	55	55	55	75	75	90
Overall dimension(L*W*H)	cm	540*470*480/520	610*480*520/570	690*510*640/690	690*550*640/690	1000*650*710/840	1000*700*723/85
Weight(about)	t	34/36	38/40	44/46	51/52	64/66	81/84

DCK5263×H/65 DCK5280×H/100 DCK52100×H/200

DCK52100×H/200 DCK5
CNC Vertical Lathe Machine





Units	DCK5263 ×H/65	DCK5263 ×H/80	DCK5280 ×H/100	DCK5280 ×H/150	DCK52100 ×H/200	DCK52100 ×H/250
mm	6300	6300	8000	8000	10000	10000
mm	5700	5700	7100	7100	8000	8000
mm	3150/3500	3150/4000	4000/4500	4000/4500	4000/4500	4000/4500
t	65	80	100	150	200	250
KN.m	250	250	460	460	540	640
r/min	0.42-42	0.42-42	0.16-16	0.16-16	0.16-16	0.16-16
KN	63	63	80	80	100	120
mm/min	0.1-500	0.1-500	0.1-500	0.1-500	0.1-500	0.1-500
mm	3400	3400	4400	4400	5400	5400
mm	1600/1800	1600/2000	2000/2250	2000/2250	2000/2250	2000/2250
mm/min	3500	3500	4000	4000	4000	4000
mm	50*50	50*50	60*60	60*60	80*80	80*80
KW	90	90	110	132	132	132
cm	1150*790*853/933	1250*750*940/1070	1730*900*1260/1310	1730*900*1260/1310	1960*1010*1260/1310	1960*1010*1260/1310
t	104/108	130/135	190/195	245/250	315/325	380/390

VERTICAL LATHE





EDM Drilling Machine





Features

- 1. Fast processing speed and low consumption.
- 2. Auto deep control for blind hole
- 3. Can drill on oblique and curved surface directly
- 4. Can use city water as coolant, low cost and no pollution (Pure water is better)

Model	703.30	703.40	703.50	703.63	703.80
Working table size (mm)	320×440	540×780	650×1000	750×1100	980×1350
Stroke X/Y (mm)	300×400	400×500	500×630	630×800	800×1000
Electrode diameter (mm)	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0
Working stroke Z axis (mm)	300	300	400	500	500
Spindle stroke W axis (mm)	300	400	500	500	500
Distance between working table & guider(mm)	300	350	400	500	500
Power (V/Hz)	sing	gle phase 220V	3 Phase 220 230	380 415V/50, 60	0HZ
Max. working current (A)	30	30	30	30	30
Capacity of working fluid (L)	25	25	25	25	25
Max.pressure of working fluid (MPa)	7	7	7	7	7
Dimension (L×W×H) (mm)	1060×750×1700	1600×1300×1800	1800×1500×1900	2100×1700×2000	2400×1900×2000
Weight (kg)	600	1100	1600	2200	2800

EDM Drilling Machine





Features

- 1. Steel water protection cover
- 2. Swivel lever for operating panel
- 3. Can drill on oblique and curved surface directly
- 4. Can use city water as coolant, low cost and no pollution (Pure water is better)

Model	703.30A	703.40A	703.50A	703.63A	703.80A
Working table size(mm)	360×480	540×780	650x1000	750×1100	980×1350
Stroke X-Y(mm)	300×400	400×500	500x630	630×800	800×1000
Electrode material		C	opper / Brass tu	be	
Electrode diameter(mm)	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0
Working stroke Z axis (mm)	300	300	500	500	500
Spindle stroke W axis(mm)	300	400	600	500	500
Spindle rotating speed(mm/min)	20-120	20-120	20-120	500	500
Distance between working table & guider(mm)	300	350	500	500	500
Max. drilling speed (mm/min)			30-60		
Max. working current (A)			30		
Max. consumption power (KVA)			3.5		
Power(V/Hz)		3 Ph, 220	V/380V/415V	50/60Hz	
Capacity of water tank(L)			25		
Max.pressure of working fluid(MPa)			7.0		
Dimension(L×W×H)(mm)	1060×750×1700	1600×1300×1800	1950x1500x2100	2100×1700×2000	2400×1900×2000
Weight(kg)	650	1400	1800	2400	3000

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

DM DRILLING





EDM Machine













COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Z Axis Linear Rail

Automatic Wire Tensioner Device

Features

- •Robust frame with "C" mast.
- ·With height adjustable cermaic guider.
- Four axes X/Y/U/V working simultaneously.
- •Taiwan linear rail, Grade P or H, Ball screw. P3 or P2.
- Special Tensioning mechanism for molybdenum wire, keep stable cutting.
- •Stepper motor is standard, Servo motor is optional.
- •Tolerance can keep in ±0.005mm, Roughness Ra 0.8

Technical Parameters

Model	DLF320C	DLF400C	DLF500C	DLF630C				
Working table size (mm)	500×720	580×820	700×1000	800×1200				
Table travel(X/Y) (mm)	320×400	400×500	500×630	630×800				
Max.cutting thickness (mm)	380	380	380	380				
Max. load on workingtable (KG)	300	500	800	1200				
Travel size(U/V) (mm)		30×30 (±6°) (option	nal: 75×75 135×135)				
Wire Dia. (mm)	(Molydber	num wire) φ0.10	-0.22 (special 0.25	, 0.30mm)				
Wire speed (m/sec)		2.0-11.0						
Max. cutting speed (mm2/min)	160-180							
Max.cutting angle	$\pm 6^{\circ}/80$ mm ($\pm 10^{\circ}/\pm 15^{\circ}/\pm 30^{\circ}$ is optional)							
Process accuracy (mm))≤0.008; (One time-c (Straightness)≤0.008					
Roughness(Ra.um)		Multi-cut):Ra≤0.8,	Single-cut):Ra≤2.0					
Driving motor		Step motor / AC ser	vo motor* (Optional)				
Guide rail and ball		Precision ball s	crew/Linear rail					
Tension system		three stage(0/1/2)	tension adjustable					
Power supply		380V/50	Hz, 2.5kw					
Weight (kg)	1200	1500	2300	2900				
Dimension (mm)	1700*1300*2050	1850*1350*2100	2100*1900*2200	2300*2100*2200				

EDM WIRE CUT MACHINE





CNC EDM Machine





Features

Adaptive discharge machining process.

High speed lifting and lifting tool height control.

Spindle fixed point control, discharge gap detection.

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Groove oil level control.

Fire-proof control, Automatic alarm device.

Carbon deposit prevention function.

Automatic measurement.

Precise edge and plane machining

Finish the servo system of.

XYZ, Panasonic AC servo motor.

X Y Z, resolution 0.4um, Minimum drive unit 1um.

Stainless steel edge for wear resistant.

	Model	540	650	850	1060		
Work table size (leng	gth×width) (mm)	850×450	900*550	1150×650	1250×800		
	X-axis (mm)	500	650	800	1000		
X/Y/Z travel	Y-axis (mm)	400	500	500	600		
	Z-axis (mm)	300	350	400	450		
Oil groove inside size (mm)		1350×860×500	1650*900*500	1800×1150×600	2000×1300×700		
Maximum load of elec	etrode (kg)	50	100	120	150		
Max.load on table (kg))	800	2000	3000	3500		
Distance from electro	de plate to work table (mm)	690-990	460-750	480-880	550-1000		
Max. Processing spee	d (mm3/min)	≥500mm3/m	in (graphite-stell); ≥400mm3/min	(Cu-steel)		
Min. electrode consur	mption	≤0.1%	≤0.1%	≤0.1%	≤0.1%		
Best Roughness (Ra)		Ra 0.1-0.2					
Maximum working cu	rrent (A)	50	50	50	50		
Total input power (KV	/A)	10	10	10	10		
Input power (V)		220/380/415	220/380/415	220/380/415	220/380/415		

CNC EDM Machine







Features

XYZ all linear rail to support heavy load and move quickly to ensure precise positioning.

Marble working table with stainless bracket, no rust.

Drilling diameter from 0.2mm to 3mm. The maximum depth ratio could be 300:1.

Capable of drilling all kinds of conductive material, and drill on all kinds shape, such as oblique and

Special program for carbide such as tungsten, fast processing speed and low consumption.

Model	450	630	800	450A	
Working table size(mm)	600*420	800*550	1100*720	500*400	
Max. load on working table (kg)	300	500	800	200	
Stroke X/Y (mm)	450*350	630*450	800*630	450*350	
Servo stroke Z (mm)	300	350	400	300	
Spindle stroke W (mm)	300	350	400	300	
Electrode diameter (mm)	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0	Ф0.2-Ф3.0	
Positioning Accuracy (mm)		±0	.01		
Repeated Position Accuracy (mm)	±0.005				
Max. drilling speed		30-60n	nm/min		
Spindle speed(rpm)		13	20		
Distance to guider(mm)	350	450	500	350	
Max. working current (A)	30	30	30	30	
Voltage (V/Hz)		220/230, 380, 415V	/ 50-60Hz, 3 Phase		
Capacity of working fluid (L)	60	60	60	60	
Max.pressure of working fluid (MPa)	8	8	8	8	
Dimension (L×W×H) (mm)	1600×1200×2100	1800×1400×2100	2100*1700*2200	1300×1200×2000	
Weight (kg)	1000	1500	2200	700	

CNC EDN





CNC EDM WIRE CUT MACHINE





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS









Digital Read Out

Roller Rail

Single cut

Multi-cut (Stepper motor)

Features

- •Roller rail for X/Y axis, also called hard rail (V Rail).
- •With ±6° taper as standard, ±15°, ±30°, ±45° as option.
- Acuracy: ±0.01/300mm
- •Roughness: Ra 1.0-2.5µm
- Low consumption, material saving.
- Different controller and different software:
- a) High speed single cut controller
- b) Multi-cut controller (which improve the accuracy and finish).

Software: AUTOCAT, X8, HL, HF All kinds of voltage: 220/380/415/440V

Technical Parameters

Model	DK7720	DK7725	DK7735	DK7745	DK7745F
Table size (mm)	490*380	580*400	740*470	830*570	930*570
X*Y travel (mm)	250*200	320*250	450*350	550*450	630*450
Max. Z travel (mm)	200	350	400	500	500
Max. load on table (kg)	200	250	350	450	450
Cutting speed (mm ² /min)	St	andard cutting speed	:110-120, Max. ci	utting speed: 160-1	80
Dimension L*W*H (mm)	1200*900*1300	1300*1100*1500	1500*1200*1650	1700*1350*1700	1750*1400*1700
Net weight (kg)	700	850	1100	1250	1300

Model	DK7750	DK7750F	DK7763	DK7763F	DK7780
Table size (mm)	1000*650	1140*650	1140*750	1350*760	1350*980
X*Y travel (mm)	630*500	800*500	800*630	1000*630	1000*800
Max. Z travel (mm)	600	600	600	600	800
Max. load on table (kg)	800	1000	1200	1400	2000
Cutting speed (mm ² /min)	Sta	andard cutting speed	:110-120, Max. c	utting speed: 160-1	80
Dimension L*W*H (mm)	1800*1600*1900	1800*1750*1900	2200*1800*2000	2200*2000*2000	2600*2200*2150
Net weight (kg)	1700	1850	2500	2700	3500

Model	DK7780F	DK77100	DK77100F	DK77120F	DK77160
Table size (mm)	1650*990	1650*1150	1900*1150	2000*1300	2600*1780
X*Y travel (mm)	1200*800	1200*1000	1400*1000	1600*1200	2000*1600
Max. Z travel (mm)	800	800/1000	800/1000	800/1000	1000/1200
Max. load on table (kg)	2000	3000	3000	4000	10000
Cutting speed (mm²/min)	St	andard cutting speed	i:110-120, Max. c	utting speed: 160-1	80
Dimension L*W*H (mm)	2600*2400*2150	3000*2800*2500	3000*3000*2500	3400*3200*2600	5300*4800*3000
Net weight (kg)	3900	5200	5800	8500	14000

EDM WIRE

130





CNC EDM WIRE CUT MACHINE



Features

- •Roller rail for X/Y axis, also called hard rail (V rail).
- •With ±15° taper ,UV roller rail (optional: linear rail).
- •With ±30°, ±45° taper ,UV linear rail

±15°taper

- •Z axis still use normal rail same as standard machine
- •Taper cutting accuracy: ±0.05mm (\$10mm)
- •Roughness: Ra 1.2-3.2µm
- Different controller and different software:
- · a) High speed single cut controller
- b) Multi-cut controller (stepper controller)
- · c) Multi-cut controller (servo motor) Software: AUTOCAT, X8, HL, HF

All kinds of voltage: 220/380/415/440V

Technical Parameters

Model	DK7735A	DK7745A	DK7745FA	DK7750A
Table size (mm)	740*470	830*570	930*570	1000*650
X*Y travel (mm)	450*350	550*450	630*450	630*500
Max. Z travel (mm)	400	400	400	400/600
Max. load on table (kg)	300	450	450	800
Max. taper (°/80mm)	±15°	±15°/30°	±15°/30°	±15° / 30°/ 45°
Cutting speed (mm ² /min)	Standard cut	ting speed:110-120	, Max. cutting spe	ed: 160-180
Dimension L*W*H (mm)	1500*1200*1850	1700*1350*1900	1750*1400*1900	1800*1600*2100
Net weight (kg)	1150	1350	1450	1800

Model	DK7750FA	DK7763A	DK7763FA	DK7780A		
Table size (mm)	1140*650	1140*750	1350*760	1350*980		
X*Y travel (mm)	800*500	800*630	1000*630	1000*800		
Max. Z travel (mm)	400/600	400/600	400/600	600/800		
Max. load on table (kg)	1000	1200	1400	2000		
Max. taper (°/80mm)	±15°/30°/45°					
Cutting speed (mm ² /min)	Standard cut	Standard cutting speed: 110-120, Max. cutting speed: 160-180				
Dimension L*W*H (mm)	1800*1750*2100	2200*1800*2000	2200*2000*2000	2600*2200*2150		
Net weight (kg)	1900	2500	2700	3400		

Model	DK7780FA	DK77100A	DK77100FA	DK77120FA		
Table size (mm)	1650*990	1650*1150	1900*1150	2000*1300		
X*Y travel (mm)	1200*800	1200*1000	1400*1000	1600*1200		
Max. Z travel (mm)	600/800	800/1000	800/1000	800/1000		
Max. load on table (kg)	2000	3000	3000	4000		
Max. taper (°/80mm)		±15°/3	30°/ 45°			
Cutting speed (mm²/min)	Standard cut	Standard cutting speed: 110-120, Max. cutting speed: 160-180				
Dimension L*W*H (mm)	2600*2400*2150	3000*2800*2500	3000*3000*2500	3400*3200*2600		
Net weight (kg)	3800	5200	5800	8500		

Specifications are subject to change without prior notice

±30°taper





CNC EDM Machine







Multi-cut (Stepper motor)











Features

- ·Linear rail for XYUVZ axis, and wire drum guide rail.
- •Big taper cutting ±30°, ±45° as option with ceramic nozzle for improving roughness.
- Taper cutting accuracy: ±0.003mm(\$\phi10mm)
- •Roughness: Ra 1.0-2.5µm
- Different controller and different software:
- · a) High speed single cut controller
- b) Multi-cut controller (stepper controller)
- c) Multi-cut controller (servo motor)

Software: AUTOCAT, X8, HL, HF All kinds of voltage: 220/380/415/440V

Technical Parameters

Model	DK7745FTB	DK7750TB	DK7763TB	DK7780TB		
Table size (mm)	960*580	1000*650	1140*750	1350*990		
X*Y travel (mm)	630*450	630*500	800*630	1000*800		
U*V travel (mm)	±135*135	±135*135	±135*135/±200*200	±135*135 / ±200*20		
Max. Z travel (mm)	400 / 600	400 / 600	400 / 600	400 / 600		
Max cutting degree / 80mm height	±30°	±30°/±45°	±30°/±45°	±30°/±45°		
Max. workpiece weight (kg)	600	800	1200	2000		
Wire Dia. (mm)	Molydbenum wire φ0.10~0.20(Special0.25,0.30mm)					
Wire speed (m/sec)	11 (single cut) / 2.0-11.0 (multi-cut)					
Max. cutting speed (mm2/min)	160-180					
Accuracy (vertival) (mm)		±0.0	01 / 300mm			
Accuracy (taper) (mm)		±0.0	3 / 300mm			
Best roughness (vertical) (um)		Ra 1.0 (single cu	t) Ra 2.5 (multi-cut)			
Driving motor	Step motor / AC servo motor* (Optional)					
Power supply	220, 380, 415V/50, 60Hz, 2.5kw					
Dimension L*W*H (mm)	1700*1350*2150	1800*1600*2250	2200*1800*2400	2600*2400*2450		
Net weight (kg)	1500	1950	2900	4000		

EDM WIRE





CNC EDM Machine





Multi-cut (Stepper motor)





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



Multi-cut (Servo motor)







Digital Read Out



High Pressure Coolant Tank

Features

- ·Linear rail for X/Y axis, also linear rail for Wire drum guide rail.
- •With ±6° taper as standard, ±15°, ±30°, ±45° as option.
- Accuracy: ±0.005/300mm
- •Roughness: Ra 1.0-2.5µm
- ·Low consumption, material saving.
- Different controller and different software:
- a) High speed single cut controller
- b) Multi-cut controller (stepper controller)
- c) Multi-cut controller (servo motor)

Software: AUTOCAT, X8, HL, HF

All kinds of voltage: 220/380/415/440V

Technical Parameters

Model	DK7725L	DK7735L	DK7745L	DK7750L
Table size (mm)	580*400	740*470	810*570	1000*650
X*Y travel (mm)	320*250	450*350	550*450	630*500
Max. Z travel (mm)	350	400	500	600
Max. workpiece weight (kg)	250	350	450	800
Cutting speed (mm ² /min)	Standard co	utting speed:110-120	, Max. cutting spee	d: 160-180
Dimension L*W*H (mm)	1300*1100*1500	1500*1200*1650	1700*1350*1700	1800*1600*1900
Net weight (kg)	850	1100	1250	1900


Model	DK7763L	DK7780L	DK77100L	DK77120L
Working Table size (mm)	1140*750	1350*990	1650*1150	2000*1350
Stroke (X*Y) (mm)	800*630	1000*800	1200*1000	1400*1200
Max. Z travel (mm)	600	800	800/1000	800/1000
Max. workpiece weight (kg)	1200	2000	4000	4000
Cutting speed (mm ² /min)	Standard co	utting speed:110-120	, Max. cutting spee	d: 160-180
Dimension L*W*H (mm)	2200*1800*2000	2600*2400*2150	3000*2800*2500	3200*3000*2600
Net weight (kg)	2700	4000	5600	8500

EDM WIRE





Drilling and Tapping Machine

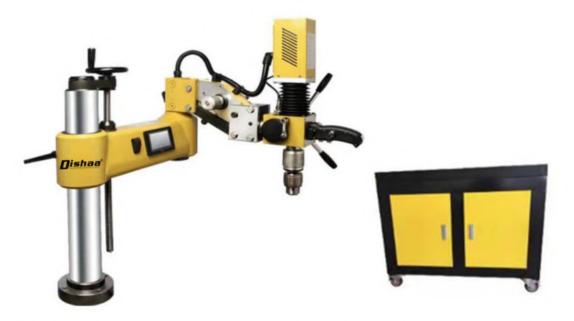

The electric servo cantilever drilling and tapping machine is suitable for drilling and tapping various machines, molds, and auto parts.

The whole machine adopts the suspended manipulator mode, which realizes the integrated interchange of drilling and tapping, which is flexible and convenient.

The operation interface adopts touch-screen operation to make drilling and tapping easier and more convenient, which can be operated by any general worker.

This machine adopts cantilever drilling and tapping integration, which is fast and convenient, replacing the existing drilling and tapping products in the market.

Technical Parameters

Model	MR 16A	
Drilling Range	Ф3-Ф16	
Topping Range	M5-M20	
Collect Qty.	7	
Working type	Vertical	
Working depth	80(mm)	
Working height	400(mm)	
Collet	M5-M20	
Working radius	850mm	
Max. Speed	315rpm	
Point angle	no	
Voltage	220V	
Power	1000W	
Weight	270KG	

Electric Tapping Machine



The machine adopts servo drive control, with intelligent torque protection, instead of the traditional lathe, drilling machine or manual tapping limitations.

Advances mechanical design, a variety of processes using mold castings, the overall rigidity is strong, durable, non-deformation, beautiful appearance.

The high definition touch screen is simple and flexible. It can realize the vertical and horizontal work of complex and heavy workpiece, locate quickly and process accurately.

Stepless speed change, manual, automatic, linkage three modes of work, whatever you choose.

Automatic mode can effectively control the depth of tapping, without the operation button, automatic control by depth controller.

Repeated positioning fast, tapping speed, high production efficiency

Technical Parameters

ITEM	MR-DS16	MR-DS24	MR-DS30	MR-DS36
Voltage	220V/50HZ	220V/50HZ	220V/50HZ	220V/50HZ
Motor Power	600W	1200W	1200W	1200W
Speed	0-312rpm	0-200rpm	0-180rpm	0-140rpm
Tap Range	M3-M16	M6-M24	M6-M30	M6-M36
ISO COLLET	M3, M4, M5, M6-	M6-8, M10, M12,	M6-8, M10, M12,	M6-8, M10, M12, M14
	8,M10, M12,	M14, M16, M18-20,	M14, M16, M18-20,	M16, M18-20, M22,
	M14,M16	M22, M24	M22, M24, M30	M24, M30, M33, M36
WEIGHT	27KG	44KG	45KG	50KG

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

TAPPING





Bench Drilling Machine



Standard Accessories

- Drill chuck
- Taper sleeve (only MT3 spindle)
- Arbor(only taper hole spindle)
- Drift(only taper hole spindle)
- Wrench

Technical Parameters

Model	DBD4113	DBD4125	DBD4132
Max. Drilling capacity(mm)	13	25	31.5
Diameter of column(mm)	70	85	85
Spindle travel(mm)	85	110	110
Distance spindle axis to generating line (mm)	180	200	200
Max distance spindle nose to worktable(mm)	390	480	480
Max. Distance spindle nose to base(mm)	570	670	670
Spindle taper(mm)	B16	Mt3	Mt3
Spindle speeds range(r/min)	450-2650	200-2280	150-2270
Spindle speeds series(r/min)	4	9	12
Dimension of worktable surface(mm)	240X240 or Ф300(Optional)	280×280 or Φ360(Optional)	280×280 or Φ360 (Optional)
Dimension of base(mm)	445x270	566x356	566x356
Overall height(mm)	960	1110	1110
Motor(W)	370	750	750
G.W/N.W(kg)	68/65	105/98	105/98
Packing size(cm)	91x51.5x27	108x77x34	108x77x34

Magnetic Drilling Machine

(Multi - Functional)



Technical Parameters

MODEL	MAX. DRILLING CAPACITY	MAX. ANNULAR CUTTING CAPACITY	MAX. TAPPING CAPACITY	RATED INPUT POWER	MAGNETIC ADHESION	NO-LOAD SPEED	SOFT	OVERLOAD PROTECTION	STEPLESS SPEED CONTROL	REVERS- BLE	Tool Holder
BJ-2800E	0	28mm	0	1480 W	13000 N	0-680 RPM	•	•	•	0	Weldon Shank 3/4"
BJ-3800E	0	38mm	0	1620 W	14500 N	0-650 RPM	•	•	•	0	Weldon Shank 3/4*
BJ-6800E	23mm	68mm	0	1720 W	15800 N	0-580 RPM	•	•	•	0	2#Morse
BJ-7800E	23mm	78mm	0	1880 W	16500 N	0-550 RPM		•	•	0	2#Morse
BJ-9800E	28mm	98mm	0	2080 W	16800 N	0-520 RPM	•	•	•	0	3 # Morse
BJ-1280E	28mm	128mm	0	2180 W	17000 N	0-500 RPM		•	•	0	3 # Morse

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
1535710	BJ-2800E	Magnetic Drill, 110V/50-60Hz	11.8
1544511	BJ-3800E	Magnetic Drill, 110V/50-60Hz	11.8
1535810	BJ-6800E	Magnetic Drill, 110V/50-60Hz	22
1535910	BJ-7800E	Magnetic Drill, 110V/50-60Hz	22
1536010	BJ-9800E	Magnetic Drill, 110V/50-60Hz	24
1536110	BJ-1280E	Magnetic Drill, 110V/50-60Hz	24

Catalog No.	Model No.	Description	N.W(kg)	
1535711	BJ-2800E	Magnetic Drill, 220V/50-60Hz	11.8	
1544510	BJ-3800E Magnetic Drill, 220V/50-60Hz		11.8	
1535811	BJ-6800E	Magnetic Drill, 220V/50-60Hz	22	
1535911	BJ-7800E	I-7800E Magnetic Drill, 220V/50-60Hz		
1536011	1536011 BJ-9800E Magnetic Drill, 220V/50-60Hz		24	
1536111	BJ-1280E	Magnetic Drill, 220V/50-60Hz	24	









Instructions













Safety rope Fuse Center Wrench Iron MT2 Support Water block bottle

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

MAGNETIC DRILLING





Vertical Drilling Machine



DVD5032/ DVD5040/ DVD5045

Vertical Drilling Machine

SPECIFICATIONS			DVD5032	DVD5040	DVD5045
Max.drilling dia.		mm	32	40	45
Spindle taper		-	MT3/R8	MT4	MT4
Spindle travel		mm	130	130	130
Spindle speed steps		-	6	6	6
Spindle speed range	50Hz	rpm	80-1250	80-1250	80-1250
spiriule speed range	60Hz	rpm	95-1500	95-1500	95-1500
Distance between spindle nose and table surface		mm	725	725	725
Distance between spindle nose and stand table		mm	1125	1125	1125
Distance from spindle axis to column surface		mm	283	283	283
Spindle box travel		mm	250	250	250
Spindle box swivel angle (horizontal/perpendicular)			360°/±90°	360°/±90°	360°/±90°
Table size		mm	380*300	380*300	380*300
Table vertical travel		mm	600	600	600
Swivel angle of table h	orizontal		360*	360°	360°
Table tilt angle		=	±45°	±45°	±45°
Stand table size		mm	417*416	417*416	417*416
Main motor power		kw	0.75(1HP)	1.1(1.5HP)	1.5(2HP)
Main motor speed		rpm	1400	1400	1400
Machine weight		kg	470	480	490
Overall dimension		mm	1000*750*1850	1000*750*1850	1000*750*1850

DVD5032C/ DVD5040C/ DVD5045C

Vertical Drilling Machine

SPECIFICATIONS		Units	DVD5032C	DVD5040C	DVD5045C
Max.drilling dia.		mm	32	40	45
Spindle taper			MT3 /R8	MT4	MT4
Spindle travel		mm	130	130	130
Spindle speed steps		-	6	6	6
Spindle speed range	50Hz	rpm	80-1250	80-1250	80-1250
spinale speed range	60Hz	rpm	95-1500	95-1500	95-1500
Distance between spindle nose and table surface		mm	700	700	700
Distance between spindle nose and stand table		mm	1125	1125	1125
Distance from spindle axis to column surface		mm	283	283	283
Spindle box travel		mm	250	250	250
Spindle box swivel angle (horizontal/perpendicular)			360°/±90°	360°/±90°	360°/±90°
Table size		mm	730*210	730*210	730*210
Table travel(X/Y)		mm	500*205	500*205	500*205
Table vertical travel		mm	570	570	570
Stand table size		mm	417*416	417*416	417*416
Main motor power		kw	0.75	1.1	1.5
Main motor speed		rpm	1400	1400	1400
Machine weight		kg	510	520	530
Overall dimension		mm	1000*950*1850	1000*950*1850	1000*950*1850



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

DVD5032/1 / DVD5040/1 / DVD5045/1

Vertical Drilling Machine

SPECIFICATIONS		Units	DVD5032/1	DVD5040/1	DVD5045/1
Max.drilling dia.		mm	32	40	45
Spindle taper		-	MT3/R8	MT4	MT4
Spindle travel		mm	130	130	130
Spindle speed steps		-	6	6	6
Saindle speed speed	50Hz	rpm	80-1250	80-1250	80-1250
Spindle speed range	60Hz	rpm	95-1500	95-1500	95-1500
Spindle feed steps		-	6	6	6
Spindle feed range		mm/r	0.06-0.30	0.06-0.30	0.06-0.30
Distance between spindle nose and table surface		mm	725	725	725
Distance between spindle nose and stand table		mm	1125	1125	1125
Distance from spindle axis to column surface		mm	290	290	290
Spindle box travel		mm	250	250	250
Spindle box swivel angle (horizontal)			360*	360"	360*
Table size		mm	380*300	380*300	380*300
Table vertical travel		mm	600	600	600
Swivel angle of table horizontal			360°	360°	360°
Table tilt angle			±45°	±45°	±45°
Stand table size		mm	417*416	417*416	417*416
Main motor power		kw	0.75(1HP)	1.1(1.5HP)	1.5(2HP)
Main motor speed		rpm	1400	1400	1400
Machine weight		kg	480	490	500
Overall dimension		mm	1000*750*1850	1000*750*1850	1000*750*185

DVD5032C/1 / DVD5040C/1 / DVD5045C/1

Vertical Drilling Machine

SPECIFICATIONS		Units	DVD5032C/1	DVD5040C/1	DVD5045C/1
Max.drilling dia.		mm	32	40	45
Spindle taper			MT3 /R8	MT4	MT4
Spindle travel		mm	130	130	130
Spindle speed steps		-	6	6	6
Spindle speed range	50Hz	rpm	80-1250	80-1250	80-1250
Spindle Speed range	60Hz	rpm	95-1500	95-1500	95-1500
Spindle feed steps		-	6	6	6
Spindle feed range		mm/r	0.06-0.30	0.06-0.30	0.06-0.30
Distance between spindle nose and table surface		mm	700	700	700
Distance between spindle nose and stand table		mm	1125	1125	1125
Distance from spindle axis to column surface		mm	290	290	290
Spindle box travel		mm	250	250	250
Spindle box swivel angle (horizontal/perpendicular)			360°/±90*	360°/±90°	360°/±90°
Table size		mm	730*210	730*210	730*210
Table travel(X/Y)		mm	500*205	500*205	500*205
Table vertical travel		mm	570	570	570
Stand table size		mm	417*416	417*416	417*416
Main motor power		kw	0.75	1.1	1.5
Main motor speed		rpm	1400	1400	1400
Machine weight		kg	520	530	540
Overall dimension		mm	1000*950*1850	1000*950*1850	1000*950*1850



www.dishaagroup.com





Vertical Drilling Machine

DVD5025 / DVD5025B / DVD5030A / DVD5035A

Vertical Drilling Machine







COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

SPECIFICATIONS	Units	DVD5025B	DVD5025	DVD5030A	DVD5035A
Max.drilling dia.	mm	25	25	30	35
Diameter of column	mm	100	100	120	140
Spindle travel	mm	150	150	135	160
Distance between spindle nose and table surface	mm	-	630	550	590
Distance between spindle nose and stand table	mm	550	1670	1100	1150
Distance from spindle axis to column surface	mm	225	225	320	330
Spindle taper		MT3	MT3	MT4	MT4
Spindle speed range	rpm	100-2900	100-2900	125-3030	125-3030
Spindle speeds steps	-	8	8	12	12
Spindle feed	mm/r	0.07-0.40	0.07-0.40	0.1-0.3	0.1-0.3
Spindle feed steps		4	4	3	3
Table size	mm	*	440	500*420	500*440
Table travel	mm		560	520	560
Stand table size	mm	690*500	690*500	645*455	645*455
Main motor power	kw	0.75/1.1	0.75/1.1	1.1/1.5	1.1/1.5
Coolant motor power	w	40	40	40	40
Machine weight	kg	235	300	410	430
Overall dimension	mm	780*520*1170	700*560*1820	875*510*2100	875*510*2150

DVD5040A / DVD5050A

Vertical Drilling Machine





SPECIFICATIONS	Units	DVD5040A	DVD5050A
Max.drilling dia.	mm	40	50
Diameter of column	mm	160	180
pindle travel	mm	200	240
Distance between spindle	(SCORE)	590	570
nose and table surface	mm	330	370
Distance between spindle	mm	1175	1160
nose and stand table	111111	11/5	1100
Distance from spindle	mm	360	360
axis to column surface	mm	565	330
Spindle taper		MT4	MT4/MT5
Spindle speed range	rpm	52-1400	42-2050
Spindle speeds steps		12	12
Spindle feed	mm/r	0.1-0.4	0.07-0.4
Spindle feed steps		3	4
Table size	mm	580*460	550*470
Table travel	mm	585	550
Stand table size	mm	730*500	450*440
Main motor power	kw	2.2	2.2/2.8
Coolant motor power	w	40	40
Machine weight	kg	650	1045
Overall dimension	mm	940*680*2405	1080*620*2450





Vertical Drilling Machine

DVD5125 / DVD5132 / DVD5140B / DVD5150B

Vertical Drilling Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

SPECIFICATIONS	Units	DVD5125	DVD5132	DVD5140B	DVD5150B
Max.drilling dia.	mm	25	32	40	50
Max.feed resistance	N	9000	12000	16000	16000
Max. allowble torque	N.m	160	200	350	350
Spindle taper	-	MT3	MT4	MT4	MT5
Spindle travel	mm	200	200	250	250
Distance between spindle nose and table surface	mm	710	710	750	750
Distance from spindle axis to column surface	mm	280	280	350	350
Spindle box travel	mm	200	200	200	200
Spindle speed range	rpm	50-2000	50-2000	31.5-1400	31.5-1400
Spindle speeds steps	step	9	9	12	12
Spindle feed range	mm/r	0.056-1.8	0.056-1.8	0.056-1.8	0.056-1.8
Spindle feed steps	step	9	9	9	9
Table size	mm	550*400	550*400	560*480	560*480
Table travel	mm	310	310	300	300
Main motor power	kw	2.2	2.2	3	3
Coolant motor power	kw	0.09	0.09	0.09	0.09
Machine weight	kg	1100	1150	1300	1350
Overall dimension	mm	980*807*2302	980*807*2302	1090*900*2530	1090*900*2530

DVD5140B/1 / DVD5150B/1 / DVD5163 / DVD51100

Vertical Drilling Machine





SPECIFICATIONS	Units	DVD5140B/1	DVD5150B/1	DVD5163	DVD5180	DVD51100
Max.drilling dia.	mm	40	50	63	80	100
Max.feed resistance	N	16000	16000	30000	30000	45000
Max. allowble torque	N.m	350	350	800	1000	1150
Spindle taper	-	MT4	MT5	MT5	MT6	MT6
Spindle travel	mm	250	250	250	250	310
Distance between spindle nose and table surface	mm	750	750	800	800	850
Distance from spindle axis to column surface	mm	335	335	375	375	480
Spindle box travel	mm	200	200	250	250	200
Spindle speed range	rpm	31.5-1400	31.5-1400	40-570	40-570	26-320
Spindle speeds steps	step	12	12	9	9	6
Spindle feed range	mm/r	0.056-1.8	0.056-1.8	0.1-0.78	0.1-0.78	0.096-0.717
Spindle feed steps	step	9	9	6	6	6
Table size	mm	800*320	800*320	650*550	650*550	760*650
Table travel(X/Y)	mm	440/300	440/300			-
Table vertical travel	mm	300	300	300	300	300
Main motor power	kw	3	3	5.5	5.5	7.5
Coolant motor power	kw	0.09	0.09	0.09	0.09	0.09
Machine weight	kg	1300	1350	2500	2600	3500
Overall dimension	mm	1090*905*2530	1090*905*2530	1455*965*2790	1455*965*2790	1465*970*317







DRM3132 / DRM3732

Universal Radial Drilling Machine

SPECIFICATIONS	Units	DRM3132	DRM3732
Max.drilling dia.	mm	32	32
Distance between spindle nose and table surface	mm	25-870	25-870
Distance from spindle axis to column surface	mm	315-815	315-815
Spindle travel	mm	130	130
Spindle taper		MT3/MT4	MT3/MT4
Spindle speed range	rpm	173-960	173-960
Spindle speed steps	+	4	4
Main motor power	kw	1.5	1.5
Machine weight	kg	850	870
Overall dimension	mm	1800*700*2044	1800*700*2044

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



SPECIFICATIONS	Units	DRM3022x7 / DRM3032x10	DRM3032X10		
Max.drilling dia.	mm	32	32		
Distance between spindle nose and table surface	mm	275-680	330-1060		
Distance from spindle axis to column surface	mm	300-700	200-910		
Spindle travel	mm	130	120		
Spindle taper	-	MT3	MT4		
Spindle speed range	rpm	100-1600	108-1000		
Spindle speed steps		8	6		
Spindle feeding range	rpm	0.08-0.23	0.10-0.25		
Spindle feeding steps		3	3		
Main motor power	kw	0.75/1.1	1.5/2.2		
Lifting motor power	kw		0.55		
Machine weight	kg	415/540	1080		
Overall dimension	mm	1220*620*1280 1270*690*1370	1400*660*2060		

DRM3040x13 Radial Drilling Machine



Main features

- Mechanical transmission
- Mechanical clamping
- Mechanical change speed
 Automatic feed





SPECIFICATIONS	Units	DRM3035x10	DRM3040x10	DRM3040X13	
Max.drilling dia.	mm	35	40	40	
Distance between spindle		300-1000	360-1000	360-1300	
nose and table surface	mm	300-1000	300-1000	300-1300	
Distance from spindle		260-1200	260-1200	260-1200	
axis to column surface	mm	200-1200	200-1200	0032.003	
Spindle travel	mm	200	200	200	
Spindle speed range	rpm	75-1220	75-1220	75-1220	
Spindle speed steps		6	6	6	
Spindle feed range	-	0.10-0.22	0.10-0.22	0.10-0.22	
Spindle feed steps		3	3	3	
Main motor power	kw	2.2	2.2	2.2	
Machine weight	kg	1200	1500	1700	
Overall dimension	mm	1500*750*2150	1500*750*2300	1800*750*2300	

ADIAL DRILLING







DRM3040x11 / I Radial Drilling Machine

 Centralized mechanical change speed



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

SPECIFICATIONS	Units	DRM3040x11	DRM3040x11B	DRM3040x11/I	DRM3040x11/II
Max.drilling dia.	mm	40	40	40	40
Distance between spindle nose and table surface	mm	320-1200	170-1100	170-1100	220-1180
Distance from spindle axis to column surface	mm	330-1100	330-1050	330-1050	340-1150
Spindle travel	mm	200	250	260	270
Spindle taper		MT4	MT4	MT4	4
Spindle speed range	rpm	75-1200	75-1200	40-1896	40-1250
Spindle speed steps	-	6	6	12	6
Spindle feed range	rpm	0.10-0.25	0.10-0.25	0.13-0.54	0.10-0.25
Spindle feed steps		3	3	4	3
Main motor power	kw	2.2	2.2	2.2	2.2
Lifting motor power	kw	0.75	0.75	0.75	0.75
Machine weight	kg	1600	1600	1600	1600
Overall dimension	mm	1500*705*2200	1500*705*2200	1655*720*2200	1500*720*2200



Main features

- Centralized mechanical change speed
- Hydraulic clamping colum and rocker arm



SPECIFICATIONS	Units	DRM3040x14	DRM3040x14B	DRM3040x14/I	DRM3040x14/II	
Max.drilling dia.	mm	40	40	40	40	
Distance between spindle nose and table surface	mm	380-1240	380-1280	280-1210	260-1050	
Distance from spindle axis to column surface	mm	320-1370	300-1350	370-1370	360-1400	
Spindle travel	mm	200	250	260	270	
Spindle taper		MT4	MT4	MT4	MT4	
Spindle speed range	rpm	75-1200	75-1200	40-1896	40-1250	
Spindle speed steps	-	6	6	12	6	
Spindle feed range	rpm	0.10-0.25	0.10-0.25	0.13-0.54	0.10-0.25	
Spindle feed steps		3	3	4	3	
Main motor power	kw	2.2	2.2	2.2	2.2	
Lifting motor power	kw	1.5	1.5	1.5	1.5	
Machine weight	kg	2000	2000	2000	2200	
Overall dimension	mm	1800*810*2300	1800*810*2300	2053*820*2483	1800*810*2200	

RADIAL DRILLING







SPECIFICATIONS	Units	DRM3050x11	DRM3050x11B
Max.drilling dia.	mm	50	50
Distance between spindle nose and table surface	mm	260-1150	130-1050
Distance from spindle axis to column surface	mm	360-1050	370-1020
Spindle travel	mm	200	250
Spindle taper		MT5	MT5
Spindle speed range	rpm	78-1100	35-1400
Spindle speed steps	-	6	12
Spindle feed range	rpm	0.10-0.56	0.054-1.723
Spindle feed steps		6	9
Main motor power	kw	4	4
Lifting motor power	kw	0.75	0.75
Machine weight	kg	1700	2200
Overall dimension	mm	1550*705*2250	1750*800*2250



SPECIFICATIONS	Units	DRM3050x14	DRM3050x14B	DRM3050x14/I
Max.drilling dia.	mm	50	50	50
Distance between spindle nose and table surface	mm	300-1200	225-1170	300-1210
Distance from spindle axis to column surface	mm	350-1310	350-1340	330-1310
Spindle travel	mm	200	250	200
Spindle taper	-	MT5	MT5	MT5
Spindle speed range	rpm	135-1100	35-1400	78-1100
Spindle speed steps		6	12	6
Spindle feed range	rpm	0.10-0.56	0.054-1.723	0.10-0.56
Spindle feed steps		6	9	6
Main motor power	kw	4	4	4
Lifting motor power	kw	1.5	1.5	1.5
Machine weight	kg	2000	2400	2300
Overall dimension	mm	1950*810*2450	2050*810*2450	2170*950*2450

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

ADIAL DRILLING











COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



SPECIFICATIONS	Units	DRH3050x16	DRH3050x16B	DRH3050x16/ I	DRH3050x16/II
Max.drilling dia.	mm	50	50	50	50
Distance between spindle nose and table surface	mm	330-1200	200-1110	200-1140	330-1210
Distance from spindle axis to column surface	mm	350-1520	350-1500	370-1520	350-1570
Spindle travel	mm	210	250	310	210
Spindle taper	-	MT5	MT5	MT5	MT5
Spindle speed range	rpm	78-1100	35-1400	29-1366	78-1100
Spindle speed steps		6	12	12	6
Spindle feed range	rpm	0.10-0.56	0.054-1.723	0.1-0.4	0.1-0.56
Spindle feed steps		6	9	4	6
Main motor power	kw	4	4	4	4
Lifting motor power	kw	1.5	1.5	1.5	1.5
Machine weight	kg	2500	2400	3000	2500
Overall dimension	mm	2170*950*2450	2050*800*2450	2200*900*2550	2170*950*2450

Radial Drilling Machine (Hydraulic Clamping)



SPECIFICATIONS	Units	DRH3040x14	DRH3050X16
Max.drilling dia.	mm	40	50
Distance between spindle nose and table surface	mm	260-1210	320-1220
Distance from spindle axis to column surface	mm	350-1370	370-1620
Spindle travel	mm	270	315
Spindle taper		MT4	MT5
Spindle speed range	rpm	32-2500	25-2000
Spindle speed steps		16	16
Spindle feed range	rpm	0.10-1.25	0.04-3.2
Spindle feed steps		8	16
Main motor power	kw	3	4
Lifting motor power	kw	0.75	1.5
Machine meight	kg	2200	3500
Overall dimension	mm	2053*820*2483	2500*1060*2800

RADIAL DRILLING





Radial Drilling Machine (Hydraulic Clamping)



SPECIFICATIONS	Units	DRH3063x20	DRH3080x20A	DRH3080x25A
Max.drilling dia.	mm	63	80	80
Distance between spindle nose and table surface	mm	290-1540	350-1585	350-1585
Distance from spindle axis to column surface	mm	430-1930	500-2070	500-2570
Spindle travel	mm	400	400	400
Spindle taper		MT5	MT6	MT6
Spindle speed range	rpm	16-1250	16-1250	16-1250
Spindle speed steps	-	16	16	16
Spindle feed range	rpm	0.04-3.20	0.04-3.20	0.04-3.20
Spindle feed steps		16	16	16
Main motor power	kw	5.5	7.5	7.5
Lifting motor power	kw	1.5	1.5	1.5
Machine weight	kg	6500	7000	9500
Overall dimension	mm	3000*1250*3300	3000*1250*3300	3500*1450*3300



SPECIFICATIONS	Units	DRH30100x31	DRH30125x40	
Max.drilling dia.	mm	100	125	
Distance between spindle	mm	750-2500	750-2500	
nose and table surface	HHII	750 2500	750 2500	
Distance from spindle	mm	570-3150	600-4000	
axis to column surface	10000	3.0 3.50	000 1000	
Spindle travel	mm	500	560	
Spindle taper		MT6	Metric 80	
Spindle speed range	rpm	8-1000	6.3-800	
Spindle speed steps	-	22	22	
Spindle feed range	rpm	0.06-3.2	0.06-3.2	
Spindle feed steps		16	16	
Main motor power	kw	15	18.5	
Rocker arm lift travel	mm	1250	1250	
Machine weight	kg	20000	28500	
Overall dimension	mm	4660*1630*4525	4960*2000*4780	

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

RADIAL DRILLING





Drilling & Milling Machine

DDM7020 / DDM7032 DDM7040 / DDM7045

Drilling And Milling Machine

Main features

Belt-driven and round colum

Standard Accessories

- Allen wrench
- Wedge
- Tie rod

- Drill chuck
- Milling cutter holder Mill chuck
- Power feed attachment
- Auto-tapping electrical
- Paraller vise Working lamp
- Coolant system Machine stand and chip tray
- Clamping kits(58pcs) Rortary table



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

SPECIFICATIONS	Units		DDM7020	DDM7032	DDM7040	DDM7045
Max.drilling dia.	mm		20	32	40	45
Max.face milling capacity	mm		63	63	80	80
Max.end milling capacity	mm		20	20	32	32
Distance between spindle nose and table surface	mm		435	450	450	450
Distance from spindle axis to column surface	mm		181.5	203.5	203.5	203.5
Spindle travel	mm		80	130	130	130
Spindle taper	-		M.T.3 or R8	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Spindle speed steps			12	12	12	12
Spindle speed	rpm	50Hz	100-2200	80-2080	80-2080	80-2080
Spinule speed	rpin	60Hz	120-2640	100-2500	100-2500	100-2500
Swivel angle of headstock (horizontal)			360	360	360	360
Table size	mm		520*160	800*240	800*240	800*240
Table travel	mm		290*140	500*175	500*175	500*175
Main motor Power	kw		0.55	0.75	1.1	1.5
Machine weight	kg		190	330	333	335
Overall dimension	mm		620*750*1700	1020*820*1860	1020*820*1860	1020*820*1860
Loading amount	-		48pcs/20'container	28pcs/20'container	28pcs/20'container	28pcs/20'containe

DDM7020G / DDM7032G DDM7040G / DDM7045G

Drilling And Milling Machine

Main features

Gear-driven and round column

- Allen wrench
- Wedge
- Tie rod

- Drill chuck Milling cutter holder
- Mill chuck
- Power feed attachment
- Auto-tapping electrical
- Paraller vise
- Working lamp
- Coolant system
- Machine stand and chip tray Clamping kits(58pcs)
- Rortary table
- 2-Axis DRO, 3-Axis DRO



SPECIFICATIONS	Units		DDM7020G	DDM7032G	DDM7040G	DDM7045G
Max.drilling dia.	mm		20	32	40	45
Max.face milling dia.	mm		63	63	80	80
Max.end milling dia.	mm		20	20	32	32
Distance between spindle nose and table surface	mm		439	440	440	440
Distance from spindle axis to column surface	mm		197.5	272.5	272.5	272.5
Spindle travel	mm		80	130	130	130
Spindle taper	-		M.T.3 or R8	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Spindle speed steps	*		6	6	6	6
Spindle speed	r.p.m	50Hz	95-1420	80-1250	80-2080	80-1250
Spiridle speed	i.p.iii	60Hz	115-1700	95-1500	95-1500	95-1500
Swivel angle of headstock (horizontal)			360/±90	360/±90	360/±90	360/±90
Table size	mm		520*160	800*240	800*240	800*240
Table travel	mm		290*140	500*175	500*175	500*175
Main motor Power	kw		0.55	0.75	1.1	1.5
Machine weight	kg		190	365	368	370
Overall dimension	mm		680*750*1700	770*880*1860	770*880*1860	770*880*1860
Loading amount			48pcs/20'container	36pcs/20'container	36pcs/20'container	36pcs/20'container

DRILLING

& MILLING





Drilling & Milling Machine

DDM7025FG / DDM7032FG DDM7040FG / DDM7045FG

Drilling And Milling Machine

Main features

Gear-driven and round column

- Allen wrench
- Wedge
- Tie rod

Optional Accessories

- Drill chuck
- Milling cutter holder
- Mill chuck
- Power feed attachment Auto-tapping electrical
- Paraller vise Working lamp
- Coolant system
- Machine stand and chip tray
- Clamping kits(58pcs) Rortary table
- 2-Axis DRO,3-Axis DRO



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

SPECIFICATIONS	Units		DDM7025FG	DDM7032FG	DDM7040FG	DDM7045FG
Max.drilling dia.	mm		25	32	40	45
Max.face milling capacity	mm		63	63	80	80
Max.end milling capacity	mm		20	20	32	32
Distance between spindle nose and table surface	mm		445	450	450	450
Distance from spindle axis to column surface	mm		203	260	260	260
Spindle travel	mm		80	130	130	130
Spindle taper	-		M.T.3 or R8	M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Spindle speed steps			6	6	6	6
Spindle speed	r.p.m	50Hz	95-1420	80-1250	80-1250	80-1250
Spiriale Speed	п.р.пп	60Hz	115-1700	95-1500	95-1500	95-1500
Swivel angle of headstock (horizontal)			±90	±90	±90	±90
Table size	mm		520*160	800*240	800*240	800*240
Table travel	mm		290*140	500*175	500*175	500*175
Main motor Power	kw		0.37	0.75	1.1	1.5
Machine weight	kg		240	370	373	375
Overall dimension	mm		680*750*1700	770*880*1860	770*880*1860	770*880*1860
Loading amount			48pcs/20'container	36pcs/20'container	36pcs/20'container	36pcs/20'containe

DDM7032FG/1 DDM7040FG/1 DDM7045FG/1

Drilling And Milling Machine

Main features

- Gear-driven and round column
- Spindle auto feed

Standard Accessories

- Allen wrench Wedge
- Tie rod

Optional Accessories

- Drill chuck
- Milling cutter holder
- Mill chuck
- Power feed attachment Auto-tapping electrical
- Paraller vise
- Working lamp
- Coolant system
- Machine stand and chip tray Clamping kits(58pcs)
- Rortary table
- 2-Axis DRO,3-Axis DRO
- Spindle box automatic lifting



SPECIFICATIONS	Units		DDM7032G/1	DDM7040FG/1	DDM7045FG/1
Max.drilling dia.	mm		32	40	45
Max.boring dia.	mm		50	60	70
Max.face milling dia.	mm		63	80	80
Max.end milling dia.	mm		20	32	32
Distance between spindle nose and table surface	mm		450	450	450
Min.distance from spindle axis to column	mm		260	260	260
Spindle travel	mm		130	130	130
Spindle taper	-		M.T.3 or R8	M.T.4 or R8	M.T.4 or R8
Spindle speed steps	-		6	6	6
Spindle speed	22.2	50Hz	80-1250	80-1250	80-1250
Spiritie speed	r.p.m	60Hz	95-1500	95-1500	95-1500
Spindle feed steps	-		6	6	6
Spindle feed range	mm/r		0.06-0.30	0.06-0.30	0.06-0.30
Swivel angle of headstock (vertical)			±90	±90	±90
Table size	mm		800*240	800*240	800*240
Table travel	mm		500*175	500*175	500*175
Main motor Power	KW		0.75(1HP)	1.1	1.5
Machine weight	kg		370	373	375
Overall dimension	mm		770*880*1860	770*880*1860	770*880*1860
Loading amount	-		36pcs/20'container	36pcs/20'container	36pcs/20'containe

& MILLING





Drilling & Milling Machine

DZX50C / DZX7550CW / DZW7550ZW

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



SPECIFICATIONS	Units	DZX50C	DZX7550CW	DZX7550ZW
Max.drilling dia.	mm	50	50	50
Max. end milling dia.	mm	100	100	100
Max. vertical milling dia.	mm	25	25	25
Max.boring dia.	mm	120	120	120
Max. tapping dia.	mm	M16	M16	M16
Distance between spindle nose and table surface	mm	38-450	90-490	90-490
Spindle taper		MT4	MT4(V/H)	MT4(V/H)
Spindle speed range	rpm	40-1400(V)	40-1400(V) 80-1300(H)	90-2000 (V) 80-1300(H
Spindle travel	mm	120	120	120
Table size	mm	900*240	1000*240	1000*240
Table travel	mm	450*240	600*240	600*240
Table feed speed	mm/min	X:15-490	X:15-490	X:16-480
Main motor power	kw	1.5/2.2(V)	1.5/2.2(V)2.2(H)	1.5/2.2(V)2.2(H)
Machine weight	kg	580	1000	1000
Overall dimensions	mm	1400*900*1500	1400*1300*2080	1400*1300*2080

Specifications are subject to change without prior notice

DZX6350C / DZX6350D / DZX6350A



SPECIFICATIONS	Units	DZX6350C	DZX6350D	DZX6350A
Max.drilling dia.	mm	50	50	50
Max. end milling dia.	mm	100	100	100
Max. vertical milling dia.	mm	25	25	25
Max.boring dia.	mm	120	120	120
Max. tapping dia.	mm	M16	M16	M16
Distance between spindle nose and table surface	mm	80-460	80-460	80-460
Spindle taper	-	MT4(V)	MT4(V)	MT4(V)
		ISO40(H)	ISO40(H)	ISO40(H)
	rpm	40-1400(V)	40-1400(V)	40-1400(V)
Spindle speed range		40-1300(H)	40-1300(H)	40-1300(H)
	mm	120	120	120
Spindle travel	mm		1200*280 Opt.1500*280	
Table size	mm		680*280 .Opt.1000*280	
Table travel	mm/min	X:16-480	X/Y:22-555	X/Y:22-555 Z:300
Main motor power	kw	1.5/2.2(V)3(H)	1.5/2.2(V)3(H)	1.5/2.2(V)3(H)
Machine weight	kg	1400	1450	1500
Overall dimension	mm	1680*1400*2350	1450*1400*2350	1450*1400*2350

162





Drilling & Milling Machine

DZX6350Z / DZX6350ZA





Specifications are subject to change without prior notice

SPECIFICATIONS	Units	DZX6350Z	DZX6350ZA
Max.drilling dia.	mm	50	50
Max. end milling dia.	mm	100	100
Max. vertical milling dia.	mm	25	25
Max.boring dia.	mm	120	120
Max. tapping dia.	mm	M16	M16
Distance between spindle nose and table surface	mm	80-460	80-460
Spindle taper		ISO40 N/A	SOREMAN
Spindle speed range	rpm	90-2000(V) 40-1300(H)	90-2000(V) 40-1300(H)
Spindle travel	mm	120	120
Table size	mm	1200*280	Opt. 1500*280
Table travel	mm	680*280	Opt.1000*280
Table feed speed	mm/min	X:16-480	X/Y:22-555 Z:300 electric
Main motor power	kw	1.5/2.2(V) 3(H)	1.5/2.2(V) 3(H)
Machine weight	kg	1400	1500
Overall dimension	mm	1680*1400*2350	1450*1400*2350

DZX6350T / DZX6332



SPECIFICATIONS	Units	DZX6350T	DZX6332
Max.drilling dia.	mm	50	50
Max. end milling dia.	mm	100	100
Max. vertical milling dia.	mm	25	25
Max.boring dia.	mm	120	120
Max. tapping dia.	mm	M16	M16
Distance between spindle nose and table surface	mm	80-460	100-460
Spindle taper		ISO40 (V/A)	MT4 (V) 13C/46 (H)
Spindle speed range	rpm	65-4500 (V) 40-1300 (H)	115-1750 (V) 40-1300 (H)
Spindle travel	mm	127	120
Table size	mm	1200*280 Opt. 1500*280	1500*320
Table travel	mm	680*280 Opt. 1000*280	800*320/450 Opt. 1000*320/450
Table feed speed	mm/min	X/Y:22-555 Z:300 electric	X/Y:22-555 Z:300 electric
Main motor power	kw	2.2(V)3(H)	1.5/2.2(V)3(H)
Machine weight	kg	1600	2050
Overall dimension	mm	1450*1400*2350	1800*1650*2500





DVM5028

Vertical Milling Machine

DVM(W)5032

Vertical Milling Machine

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



SPECIFICATIONS	Units	DVM5028	DVM(W)5032	DVM5032K
Table size	mm	1200*280	1500*320	1500*320
Table travel	mm	650/320/350	800/300/320	800/300/400
T slot(number-width*pitch)	mm	3-14-50	3-16-70	3-16-70
Spindle taper	-	ISO40 7:24	ISO50 7:24	ISO50 7:24
Spindle speed range	rpm	40-1300(12steps)	40-1300(12steps)	40-1300(12steps
Distance between spindle		FO 400	FO 400	FO 400
nose and table surface	mm	50-400	50-400	50-400
Distance from spindle		220	220	320
axis to column surface	mm	320	320	320
Main motor power	kw	3	4	4
Machine Weight	kg	1500	2200	2400
Overall dimension	mm	1700*1700*1850	2000*1820*2100	2020*1800*2150

Rotary table

DVM5036B / DVM5036B-1 / DVM5036K

Vertical Milling Machine



SPECIFICATIONS	Units	DVM5036B	DVM5036B-1	DVM5036K
Table size	mm	1500*360	1500*360	1500*360
Table travel	mm	800/320/450	1000/320/450	1000/320/450
T slot(number-width*pitch)	mm	3-18-80	3-18-80	3-18-80
Spindle taper	-	ISO50 7:24	ISO50 7:24	ISO50 7:24
Spindle speed range	rpm	60-1700(12steps)	60-1700(12steps)	60-1800(12steps
Distance between spindle		60-540	60-540	60-540
nose and table surface	mm	60-340	00-340	00-340
Distance from spindle		360	260	360
axis to column surface	mm	360	360	360
Main motor power	kw	4	4	5.5
Machine Weight	kg	2700	2700	3300
Overall dimension	mm	2600*2200*2220	2600*2200*2220	2700*2300*2400

ERTICAL MILLING





DHM6032(B)

Horizontal Milling Machine



Main features

- X. Y motorized feed
- Z axis electric lifting

- Optional configuration
- 3 axis DRO Rotary table
- Dividing head Clamping kit

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Units DHM6128 **SPECIFICATIONS** Table size 1200*280 1500*320 Table travel 680/280/400 1000/300/400 T slot(number-width*pitch) 3-14-50 3-16-70 mm IS040 7:24 IS040 7:24 Spindle taper Spindle speed range(steps) rpm 40-1300 (12) 40-1300 (12) Distance between spindle mm 0-400 0-400 axis and table surface Main motor power kw 1300 Machine weight kg 2050 1725*1450*1750 Overall dimension 2070*1900*1850

DHM6036

Horizontal Milling Machine



Main features

X, Y motorized feed Z axis electric lifting

- 3 axis DRO Rotary table
- Dividing head Clamping kit

SPECIFICATIONS	Units	DHM6036	
Table size	mm	1500*360	
Table travel	mm	1000/320/450	
T slot(number-width*pitch)	mm	3-18*80	
Spindle taper		ISO50 7:24 ISO40 7:24	
Spindle speed range(steps)	rpm	60-1800 (12)	
Distance between spindle axis and table surface	mm	0-450	
Main motor power	kw	4	
Machine Weight	kg	2400	
Overall dimension	mm	2220*1790*1860	

HORIZONTAL MILLING





DTM4H

Turret Milling Machine



- pneumatic draw bar

SPECIFICATIONS	Units	DTM4H	DTM5H	
Table size	mm	1270*254(10"*50")	1370*305(12"*54")	
Table travel	mm	780/400/400	780/ 420 /420	
T slot(number-width*pitch)	mm	3-16*50	3-16*65	
Saladia tanan	_	R8	R8	
Spindle taper		opt.ISO40	opt.ISO40	
Spindle speed range(steps) rpm		50HZ:65-4500,60HZ:80-5440 (16)		
Spindle Speed range(steps)	rpm	opt.(variabl	riable)65-4000	
Spindle travel	mm	127	127	
Spindle feed range(steps)	mm	0.045,0.086,0.142(3)	0.045,0.086,0.142(3)	
Distance between spindle nose and table surface	mm	90-510	90-510	
Main motor power	kw	2.2	2.2	
Head rotation (left - right)	•	±90°	±90"	
Head rotation (front - rear)	*	±45*	±45*	
Machine weight	kg	1400	1600	
Overall dimension	mm	1550*1650*2250	1550*1650*2250	

DTM4HW

Turret Milling Machine



- 3 axis DRO Clamping kit
- pneumatic draw bar
- Dividing head

Rotary table

cutter

SPECIFICATIONS	Units	DTM4HW	DTM5HW
Table size	mm	1270*254	1370*305
Table travel	mm	780/420/400	810/420/400
T slot(number-width*pitch)	mm	3-16*65	3-16*65
Spindle taper	-	R8/ISO40	R8/ISO40
Horizontal spindle taper	-	ISO40	ISO40
Spindle spend spage(stops)		50HZ:65-4500,60HZ:80	-5440(16)
Spindle speed range(steps)	rpm	opt.(variable)65-40	000
Horizontal spindle speed range(steps)	rpm	45-1350(12)	45-1350(12)
Spindle travel	mm	127	127
Spindle feed range(steps)t	mm	0.045,0.086,0.142(3 steps)	0.045,0.086,0.142(3 steps)
Distance between spindle nose and table surface	mm	90-510	90-510
Distance between spindle axis and table surface	mm	0-400	0-400
Main motor power	kw	2.2(V)3(H)	2.2(V)3(H)
Head rotation (left - right)	•	±90°	±90°
Head rotation (front - rear)		±45°	±45*
Machine weight	kg	1750	1850
Overall dimension	mm	1550*1650*2250	1550*1650*2250

DTM5HW

Turret Milling Machine



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Turret Milling Machine

DTM5H

URRET MILLING





DTM6325 / DTM6330

Turret Milling Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- 3 axis DRO Clamping kit
- automatic feed pneumatic draw bar
- Electronic oil pump Dividing head
- Rotary table
- SPECIFICATIONS DTM6325 DTM6330 Table size mm 1270*254(10"*50") 1370*305(12"*54") Table trave 780/400/400 810/400/400 T slot(number-width*pitch 3-16*65 R8/ISO40(opt.) Horizontal spindle taper ISO400 50HZ:65-4500 60HZ:80-5440 (16) 50HZ:65-4500 60HZ:80-5440 (16) Spindle speed range(steps) opt. variable 65-4000 opt.variable 65-4000 Horizontal spindle speed range(steps) 45-1350(12) Spindle travel 127 mm 127 0.045,0.086,0.142(3) Spindle feed range(steps) 0.045,0.086,0.142(3) mm 90-510 90-510 nose and table surface Distance between spindle mm 120-520 axis and table surface 2.2 2.2(立V) 3(卧H Main motor power Head rotation (left - right ±90° Head rotation (front - rear) ±45° ±45° Machine weight kg 1400 1850 Overall dimension 1550*1650*2250 1550*1650*2250

DTM6332 / DTM6336 Turret Milling Machine

- 3 axis DRO Clamping kit
 - pneumatic draw bar
- Electronic oil pump Dividing head
 - cutter

SPECIFICATIONS	Units	DTM6328	DTM6332	DTM6336
Table size	mm	1200*280	1370*320	1500*360
Table travel	mm	600/240/360	800/300/400	1000/320/450
T slot(number-width*pitch)	mm	3-14*63	3-14*70	3-18*80
Spindle taper		ISO40 7:24	ISO40 7:24	ISO40 7:24
Horizontal spindle taper		ISO40 7:24	ISO40 7:24	ISO50 7:24
		50HZ:65-4500 (16) 60HZ:80-5440	50HZ:65-4500 (16) 60HZ:80-5440	50HZ:65-4500 (16) 60HZ:80-5440
Spindle speed range(steps)	rpm	opt, (variable)65-4000	opt. (variable)65-4000	opt. (variable)65-4000
Horizontal spindle speed range(steps)		40-1300(12)	40-1300(12)	60-1800(12)
Spindle travel	mm	127	127	127
Spindle feed range(steps)	mm	0.045,0.086,0.142(3)	0.045,0.086,0.142(3)	0.045,0.086,0.142(3
Distance between spindle nose and table surface	mm	140-500	140-540	140-590
Distance between spindle axis and table surface	mm	0-360	0-400	0-450
Main motor power	kw	2.2(V)3(H)	2.2(V)3(H)	3.7(V)4(H)
Head rotation (left - right)	è	±90°	±90°	±90°
Head rotation (front - rear)		±45°	±45°	±45°
Machine weight	kg	1400	2000	2400
Overall dimension	mm	1550*1650*2250	2200*1820*2350	2600*2200*2550

IRRE

ROTARY HEAD MILLING

Milling Machine

DMX6226 / DMX6232

Rotary Head Milling Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- 3 axis DRO Clamping kit
- Electronic oil pump
 Rotary table Dividing head

SPECIFICATIONS	Units	DMX6226	DMX6232	DMX6236
Table size	mm	1200*260	1370*320	1500*360
Table travel	mm	600/280/400	800/320/400	1000/300/350
T slot(number-width*pitch)	mm	5-14*40	3-16*60	5-14*63
Spindle taper	*	ISO40	ISO40	ISO 50
Spindle speed range(steps)	rpm	48-1660(12)	48-1660(12)	45-1660/40-1300
Distance between spindle nose and table surface	mm	100-500	120-520	220-660
Distance between spindle axis and table surface	mm			0-440
Table feed range (steps)	mm/min	X:48-370(8) YZ:manual	XY:22-555(8) Z:electric	
Swivel angle of milling head	•	360	360	360
Main motor power	kw	3	3	4
Feed motor power	kw	0.75	1.1	
Machine weight	kg	1400	1700	2450
Overall dimension	mm	1660*1500*1750	1700*1560*1750	2020*1710*1994

DUM6432 / DUM6436



- Clamping kit
 cutter
- Electronic oil pump
 Rotary table Dividing head

SPECIFICATIONS	Units	DUM6432	DUM6438
Table size	mm	1500*320	1500*360
Table travel	mm	1000/320/400	1000/320/400
T slot(number-width*pitch)	mm	3-16*60	3-18*80
		ISO40(V)	ISO40(V)
Spindle taper		ISO40(H)	ISO40(H)
Spindle speed range(steps)	rpm	48-1660(12)(V)	48-1660(12)(V)
Spindle speed range(steps)	rpm	40-1300(12)(H)	40-1300(12)(H)
Distance between spindle nose and table surface	mm	120-520	150-550
Distance between spindle axis and table surface	mm	0-400	0-400
Table feed range(steps)	mm /min	XY:22-555 (8) Z:electric	XY:22-555 (8) Z:electri
Swivel angle of milling head	6	360	360
Main motor power	kw	3(V)/3(H)	4(V)/4(·H)
Feed motor power	kw	1.1	1.1
Machine weight	kg	2100	2580
Overall dimension	mm	2050*1750*2000	2550*2050*2050





DXA7140

Bed Type Milling Machine



SPECIFICATIONS	Units	DXA7130	DXA7140
Table size	mm	1525*320	1400*400
Table travel	mm	1050*470	800*400
T slot(number-width*pitch)	mm	3-14*80	3-18*100
Spindle taper		ISO40	ISO50
Spindle travel	mm	127	105
Spindle speed range	rpm	70-3620	18-1800
Distance between spindle axis and table surface	mm	70-570	150-650
Distance from spindle axis to column surface	mm	450	520
Main motor power	HP	5	7.5
Machine weight	Kg	2300	3860
Overall dimension	mm	2565×2045×2290	2290*1840*2120

DXA7150



SPECIFICATIONS	Units	DXA7150	DXA715	DXA716
Table size	mm	2000*400	2100*500	2500*575
Table travel	mm	1500*500	1500*670-670	1800(2000)*600*900
T slot(number-width*pitch)	mm	3-18*100	4-20*100	3-22*152
Spindle taper		ISO50	ISO50	ISO50
Spindle speed range	rpm	66-1440	35-1345	40-1200/12
Distance between spindle nose and table surface	mm	100-650	0-670	49
Distance from spindle axis to column surface	mm	600	610	110
Main motor power	HP	7.5	7.5	11
Machine weight	Kg	5000	7360	10000
Overall dimension	mm	3000*2285*2340	3300*2380*2750	4300*3200*3300

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

ED

TYPE MILLING





Vertical Machining Center/ CNC Milling Machine DVMC550 / DVMC640 DVMC650 / DVMC840



Standard configuration

- System:KND-1000/GSK980MDi
- 16 Armless Tool Magazine
- 3 axis Linear Rail

Optional configuration









10000rpm spindle

The 4th Axis

24 Arm

SIEMENS,MITSUBISHI,FANUC,SYNTEC

SPECIFICATIONS	Units	DVMC550	DVMC640	DVMC650	DVMC840
Table size	mm	700*350	800*300	800*400	1000*400
X axis travel	mm	550	600	650	800
Y axis travel	mm	350	360	400	400
Z axis travel	mm	500	450	500	500
Max. worktable load	kg	300	300	400	450
T slot(number-width*pitch)	-	3-18*105	3-16*80	3-18*125	3-18*130
Max. spindle speed	rpm		8000(Optiona	l:10000)	
Spindle taper	mm	BT40	BT40	BT40	BT40
Main motor power	kw	5.5	5.5	5.5	5.5
X/Y/Z rapid traverse speed	m/min		24/24/20 (Option	al:48/48/36)	
Cutting feed speed	mm/min	1-10000	1-10000	1-10000	1-10000
Guide rail type	>=	Linear rail	Linear rail	Linear rail	Linear rail
Distance from spindle axis to column surface	mm	400	410	469	520
Distance between spindle nose and table surface	mm	100-600	100-550	100-600	130-630
Positioning accuracy	mm	±0.0075	±0.0075	±0.0075	±0.0075
Repeat positioning accuracy	mm	±0.005	±0.005	±0.005	±0.005
Tool magazine	-		Armless 16(0	ptional: Arm24)	
Max. tool diameter	mm	ф90	ф90	ф90	ф90
Max.tool weight	kg	8	8	8	8
Machine weight	kg	3200	3000	4000	4200
Overall dimension	mm	2100*1950*2300	1900*1700*2100	2400*2000*2550	2500*2050*25

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

VERTICAL MACHINING





Vertical Machining Center/ CNC Milling Machine

DVMC1060 / DVMC1160 DVMC1270 / DVMC1370



- Spindle Unit
- Pressure cylinder
- Bearing
- Coupling
- Tool magazine

Brand

- ROYAL/POSA
- SP/AirTAC/SY
- NSK
- R+W
- OKADA

Name

- Lubricating pump
- Ball screw
- Linear rail
- Rail protection Electrical parts

Brand

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- HERG
- HIWIN/PMI
- HIWIN/PMI KEYARROW
- Schneider

Optional configuration









The 5th Axis

Oil coolant

Oil-Water separator

SIEMENS, MITSUBISHI, FANUC, SYNTEC

SPECIFICATIONS	Units	DVMC1060	DVMC1160	DVMC1270	DVMC1370
Table size	mm	1200*600	1200*600	1300*700	1400*700
X axis travel	mm	1000	1100	1200	1300
Y axis travel	mm	600	600	700	700
Z axis travel	mm	600	600	600	700
Max. worktable load	kg	800	1000	1200	1400
T slot(number-width*pitch)	-	5-18*120	5-18*125	5-18*125	5-22*140
Max. spindle speed	rpm		8000(Optio	nal:10000)	
Spindle taper	mm	BT40	BT40	BT50	BT50
Main motor power	kw	11/15	11/15	11/15	15/18.5
X/Y/Z rapid traverse speed	m/min	24/24/20	24/24/20	24/24/18	24/24/18
Cutting feed speed	mm/min	1-8000	1-8000	1-6000	1-6000
Guide rail type		Linear rail	Linear rail	Linear rail	Linear rail
Distance from spindle axis to column surface	mm	650	650	780	780
Distance between spindle nose and table surface	mm	130-680	140-740	140-700	160-860
Positioning accuracy	mm	±0.0075	±0.0075	±0.0075	±0.0075
Repeat positioning accuracy	mm	±0.005	±0.005	±0.005	±0.005
Tool magazine	-	Arm 24	Arm 24	Arm 24	Arm 24
Max. tool diameter	mm	φ78 (Adjacent)/	ф120(Apart)	φ112 (Adjacent),	/ φ200(Apart)
Max.tool weight	kg	8	8	18	18
Machine weight	kg	6900	7000	9500	10000
Overall dimension	mm	3200*2600*2900	3400*2600*2900	3400*2900*3000	3870*2900*300

CENTRE

VERTICAL MACHINING





Shaper Machine



SPECIFICATIONS	Units	DMS635A
Max. shaping length	mm	350
Table size	mm	350*300
Table horizontal travel (horizontal)	mm	400
Table vertical travel (vertical)	mm	270
Ram moving frequency per minute	times/min	32-125
Distance between ram lower end to table surface	mm	330
Tool head travel	mm	110
Tool head tilt angle		±60
Tool size	mm	20*30
400000000000000000000000000000000000000		14
Main motor power	kw	1.5
Machine weight	kg	1250
Overall dimension	mm	1500*1100*1500

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



DMS6050/DMS6063 DMS6066 Shaper Machine

SPECIFICATIONS	Units	DMS6050	DMS6063	DMS6066
Max. shaping length	mm	500	630	660
Table size	mm	440*360	630*400	660*400
Table horizontal travel (horizontal)	mm	525	630	630
Table vertical travel (vertical)	mm	270	360	360
Ram moving frequency per minute	times/min	14-80	14-80	14-80
Distance between ram lower end to table surface	mm	370	385	385
Tool head travel	mm	120	120	120
Tool head tilt angle		±60	±60	±60
Tool size	mm	20*30	20*30	20*30
	mm	18	18	18
Main motor power	kw	3	3	3
Machine weight	kg	1760	1870	1920
Overall dimension	mm	2000*1300*1600	2000*1300*1650	2000*1300*1650



SPECIFICATIONS	Units	DMS6085	DMS60100	DMSH60100
Max. shaping length	mm	850	1000	1000
Table size	mm	800*450	1000*500	1000*500
Table horizontal travel (horizontal)	mm	710	800	800
Table vertical travel (vertical)	mm	360	380	380
Ram moving frequency per minute	times/min	17-100	15-83	3-44
Distance between ram lower end to table surface	mm	400	400	400
Tool head travel	mm	160	160	160
Tool head tilt angle		±60	±60	±60
Tool size	mm	30*45	30*45	30*45
30030	mm	22	22	22
Main motor power	kw	5.5	7.5	7.5
Machine weight	kg	3090	5150	5150
Overall dimension	mm	2450*1450*1800	3700*1600*1800	3700*1600*180

SHAPER

182





Circular Saw Machine DCS225 / DCS250 / DCS315 / DCS350



SPECIFICATIONS	Units	DCS 225	DCS 250	DCS 315	DCS 350
Max. blade size	mm(")	225(8.9)	250 (9.8)	315 (12.4)	350 (13.8)
90°Circular	mm(")	60 (2.36)	60 (2.36)	100 (4)	120 (4.7)
90°Rectangular	mm(")	50*50(2*2)	75*45 (3*1.77)	140*90 (5.5*3.5)	140*100 (5.5*4
45°Circular	mm(")	52 (2.05)	55(2.16)	90 (3.5)	105 (4.1)
45°Rectangular	mm(")	50*50 (2*2)	55*45 (2.16*1.77)	100*90 (4*3.5)	100*100 (4*4)
Blade speed	rpm	46	42	18,36	18,36
Max Vice opening	mm(")	70 (2.8)	100 (4)	145 (5.7)	145 (5.7)
Main motor power	kw	0.75/1.3	1.1/1.5	0.75/1.3	0.75/1.3
Drive		Gear	Gear	Gear	Gear
Machine weight	kg	63/75	143/171	185/207	190/212
Overall dimension	ma ma	64*39*72	89*58*78	980*620*900	980*620*950
Overall dimension	mm		77*46*33	770x580x470	770x580x470

Hacksaw Machine DHS7125 / DHS7132 / DHS7140 / DHS7150



SPECIFICATIONS	Units	DHS7125	DHS7132	DHS7140	DHS7150
Cutting circular	mm	250	320	400	500
Cutting rectangular	mm	220*220	290*290	330*330	400*400
Cutting oblique		45	45	45	45
Blade speed	rpm	34,60,84	34,60,84	34,60,84	34,60,84
Blade size	mm	450*45*2.25	600*50*2.5	650*50*2.5	750*63*2.5
Main motor power	kw	2.22	3	3	3
Coolant motor power	kw	0.04	0.04	0.04	0.04
Saw blade rapid down	kw	0.25	0.25	0.25	0.25
Machine weight	kg	600/830	1100/1350	1200/1450	1450/1700
Overall dimension	mm	2000*950*1300	2440*1020*1600	2440*1020*1600	2440*1190*1760





Sawing Machine



DBS-115
Band saw machine





DBS 280G Band saw machine



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

DBS 460G Band saw machine

SPECIFICATIO	NS	Units	DBS-115	DBS 712N	DBS 280G	DBS 460G
90°Circular		mm(")	115(4.5)	178(7)	220(8.6)	330 (13)
90°Rectangular	9	mm(")	100*150mm(4*6)	178*305(7*12)	250 * 155(10*6.1)	460*250 (18*9.8)
60°Circular		mm(")		-	100(4)	205 (8)
60°Rectangular		mm(")	*		80*95 (3.1*3.7)	205*250 (8*9.8)
45°Circular		mm(")	100 (4)	127 (5)	160 (6)	305 (12)
45°Rectangular		mm(")	60*100(2.4*4)	120*125 (4.75*4.88)	160*110 (6.3 *4.3)	305*250 (12*9.8)
Blade speed	50HZ	mpm	20.29.50	27,41,59,78	40/80	40/80
blade speed	60HZ	mpm	24.35.61	22,34,49,64	48/96	48/96
Blade size		mm	13*0.6*1538	20*0.9*2362	27*0.9*2450	27*0.9*3960
Main motor pov	ver	kw	0.375	0.75	0.75/1.1	1.5/2.2
Drive		-	V-belt	V-belt	Gear	Gear
Machine weight		kg	68/72	145/178	254/287	750/830
Overall dimensi	on	mm	970*460*460	1250*450*1150	1330*800*1050 670*400*620	2310*1070*1630



DBS 912B sawing machine



DBS 1018B



DBS 916V



DBS 1018R

SPECIFICATIONS		Units	DBS 912B	DBS 916V	DBS 1018B	DBS 1018R
90°Circular		mm(")	229 (9)	229 (9)	254 (10)	254 (10)
90°Rectangular		mm(")	178*305 (7*12)	127*405 (5*16)	127 * 457(5*18)	160*406 (6.3*16)
45°Circular		mm(")	150 (6)	150 (6)	150 (6)	170 (6.7)
45°Rectangular		mm(")	127*150 (5*6)	150*190 (6*7.5)	150*190 (6*7.5)	160*190 (6.3*7.5
Blade speed	50HZ	mpm	26,50,73,95	18-102	29,50,73,95	29,50,73,95
blade speed	60HZ	mpm	32,60,80,115	22-122	35,60,88,115	35,60,88,115
Blade size		mm	27*0.9*2655	27*0.9*3215	27*0.9*3280	27*0.9*3215
Main motor pov	ver	kw	1.1	1.5	1.5	1.5
Drive		*	V-belt	V-belt	V-belt	V-belt
Machine weight		kg	230/260	320/380	310/385	300/360
Overall dimension	on	mm	1540*590*1150	1800*770*1400	1830*830*1150	1890*840*1340

BANDSAW



Dishaa®

DBSH4220 / DBSH4228 / DBSH4230 **DBSH4235**

Band Saw Machine



Optional configuration





 Protective cover power failure protection



Fast down protection



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Saw blade hydraulic clamping

SPECIFICATIONS	Units	DBSH4220	DBSH4228	DBSH4230	DBSH4235
Cutting circular	mm	200	280	300	350
Cutting rectangular	mm	200*200	280*280	300*300	350*350
Blade speed	m/min	27,45,69	27,45,69	27,45,69	27,45,69
Blase size	mm	2800*27*0.9	3505*27*0.9	3505*27*0.9	4115*34*1.1
Main motor power	kw	1.5	2.2	3	3
Hydraulic motor power	kw	0.55	0.55	0.55	0.55
Coolant motor power	kw	0.04	0.04	0.04	0.04
Machine weight	kg	620	800	900	1000
Overall dimension	mm	1400*930*1270	1950*1100*1750	1950*1100*1750	2100*1160*1850

DBSH4240 / DBSH4250 **DBSH4260**



Optional configuration



Saw blade variable speed



Hydraulic chip conveyor



Saw blade broken protection



Electric feed rack

SPECIFICATIONS	Units	DBSH4240	DBSH4250	DBSH4260
Cutting circular	mm	400	500	600
Cutting rectangular	mm	400*400	500*500	600*600
Blade speed	m/min	27,45,69	27,45,69	27,45,69
Blase size	mm	5000*41*1.3	5800*41*1.3	6650*54*1.6
Main motor power	kw	4	5.5	5.5
Hydraulic motor power	kw	0.75	0.75	1.5
Coolant motor power	kw	0.09	0.09	0.125
Machine weight	kg	1500	1900	2300
Overall dimension	mm	2460*1270*2000	2960*1470*2200	3250*1600*2300

BANDSAW



DBSH4265 / DBSH4270 DBSH4280 / DBSH42100



SPECIFICATIONS	Units	DBSH4265	DBSH4270	DBSH4280	DBSH42100
Cutting circular	mm	650	700	800	1000
Cutting rectangular	mm	650*650	700*700	800*800	1000*1000
Blade speed	m/min	27,45,69	27,45,69	27,45,69	27,45,69
Blase size	mm	6900*67*1.6	7205*67*1.6	8820*67*1.6	9820*67*1.6
Main motor power	kw	5.5	7.5	7.5	11
Hydraulic motor power	kw	1.5	1.5	2.2	3.75
Coolant motor power	kw	0.125	0.125	0.125	0.125
Machine weight	kg	3100	5100	7100	8600
Overall dimension	mm	3500*1900*2400	3500*2000*2600	3560*2100*2700	4560*2170*3040



SPECIFICATIONS	Units	DSHS4228	DBHS4230	DBHS4235	DBHS4240	DBHS4250	DBHS4260
Cutting circular	mm	280	300	350	400	500	600
Cutting rectangular	mm	280*280	300*300	350*350	400*400	500*500	600*600
Blade speed	m/min	27,45,69	27,45,69	27,45,69	27,45,69	27,45,69	27,45,69
Blase size	mm	3505*27*0.9	3505*27*0.9	4115*34*1.1	5000*41*1.3	5800*41*1.3	6650*54*1.6
Main motor power	kw	2.2	3	4	5.5	5.5	5.5
Hydraulic motor power	kw	0.75	0.75	0.75	0.75	1.5	1.5
Coolant motor power	kw	0.09	0.09	0.09	0.09	0.09	0.125
Machine weight	kg	1400	1500	1700	2100	2500	3100
Overall dimension	mm	2000*2430*1650	2000*2450*1650	2250*2450*1600	2460*2320*2000	2960*2320*2200	3280*2320*2400

CNC BANDSAW





DBHZ4228 / DBHZ4230 / DBHZ4235 **DBHZ4240 / DBHZ4250**

Rotary Band Saw Machine



SPECIFICATIONS	Units	DBHZ4228	DBHZ4230	DBHZ4235	DBHZ4240	DBHZ4250
90°Circular	mm	280	300	350	400	500
90°Rectangular	mm	300*280	320*300	380*350	600*400	700*500
45°Circular	mm	190	200	200	300	400
45°Rectangular	mm	210*190	220*200	240*220	400*300	500*400
Blade speed	m/min	27,45,69	27,45,69	27,45,69	27,45,69	27,45,69
Blase size	mm	3505*27*0.9	3850*27*0.9	4525*34*1.1	5050*41*1.3	5880*41*1.3
Main motor power	kw	2.2	3	4	5.5	5.5
Hydraulic motor power	kw	0.55	0.55	0.55	1.5	1.5
Coolant motor power	kw	0.04	0.04	0.04	0.125	0.125
Machine weight	kg	850	950	1050	1600	1900
Overall dimension	mm	2100*1300*1550	2100*1300*1550	2300*1350*1650	2460*1950*2000	2960*2150*220

DBSZ4228-CNC / DBSZ4230-CNC / DBSZ4235-CNC DBSZ4240-CNC / DBSZ4250-CNC



SPECIFICATIONS	Units	DBSZ4228-CNC	DBSZ4230-CNC	DBSZ4235-CNC	DBSZ4240-CNC	DBSZ4250-CNC
90°Circular	mm	280	300	350	400	500
90°Rectangular	mm	300*280	320*300	380*350	600*400	700*500
45°Circular	mm	190	200	200	300	400
45°Rectangular	mm	210*190	220*200	240*220	400*300	500*400
Blade speed	m/min	27,45,69	27,45,69	27,45,69	27,45,69	27,45,69
Blase size	mm	3505*27*0.9	3850*27*0.9	4525*34*1.1	5050*41*1.3	5880*41*1.3
Main motor power	kw	2.2	3	4	5.5	5.5
Hydraulic motor power	kw	0.55	0.55	0.55	1.5	1.5
Coolant motor power	kw	0.04	0.04	0.04	0.125	0.125
Machine weight	kg	1500	1600	1800	2200	2600
Overall dimension	mm	2100*1300*1550	2100*1300*1550	2300*1350*1650	2460*1950*2000	2960*2150*2200

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

CNC ROTARY BANDSAW





DM7163

Surface Grinder Machine



SPECIFICATIONS		Units	DM7163 /1250	DM7163 /1600	DM7163 /2000
Table size (L*W)		mm	1250*630	1600*630	2000*630
Max. Longitudinal movement	of worktable	mm	1350	1700	2100
Max. Distance from the spind	le centerline to the workta	ble mm	880	880	880
Max. Cross movement of grin	ding head	mm	700	700	700
Max. Vertical movement of gr	inding head	mm	600	600	600
Vertical movement of the	Every lattice	mm	0.01	0.01	0.01
grinding head by hand wheel	Each turn	mm	1	1	1
	Power	KW	0.55	0.55	0.55
Rapid lifting motor	Speed	r/min	1440	1440	1440
T-slot of table		mm*n	18*3	18*3	18*3
Table rapid move speed		m/min	3-22	3-22	3-22
Auto feeder speed of table fro	ont and back (Stepless)	m/min	0.6-10	0.6-10	0.6-10
Grinding wheel size (L*D*W)		mm	400*127*40	400*127*40	400*127*40
Speed of grinding wheel		r/min	1440	1440	1440
Power of spindle motor		KW	7.5	7.5	11
Power of oil pump motor		KW	4	5.5	5.5
Processing accuracy		mm	0.005/300	0.005/300	0.005/300
Surface roughness		um	Ra : 0.63	Ra : 0.63	Ra : 0.63
Machine weight		kg	5000	6800	7500
Overall dimension(L*W*H)		mm	3700*2000*2450	4800*2000*2450	5800*2100*2450

DM7180

Surface Grinder Machine



SPECIFICATIONS		Units	DM7180 /1250	DM7180 /1600	DM7180 /2000
Table size (L*W)		mm	1250*800	1600*800	2000*800
Max. Longitudinal movement	of worktable	mm	1350	1700	2100
Max. Distance from the spindle	centerline to the worktable	e mm	880	880	880
Max. Cross movement of grind	ling head	mm	840	840	840
Max. Vertical movement of gri	nding head	mm	600	600	600
Vertical movement of the	Every lattice	mm	0.01	0.01	0.01
grinding head by hand wheel	Each turn	mm	1	1	1
	Power	KW	0.55	0.55	0.55
Rapid lifting motor	Speed	r/min	1440	1440	1440
T-slot of table		mm*n	18*5	18*5	18*5
Table rapid move speed		m/min	3-25	3-25	3-25
Auto feeder speed of table fro	nt and back (Stepless)	m/min	0.6-10	0.6-10	0.6-10
Grinding wheel size (L*D*W)		mm	400*127*40	400*127*40	400*127*40
Speed of grinding wheel		r/min	1440	1440	1440
Power of spindle motor		KW	11	11	11
Power of oil pump motor		KW	5.5	7.5	7.5
Processing accuracy		mm	0.005/300	0.005/300	0.005/300
Surface roughness		um	Ra : 0.63	Ra : 0.63	Ra : 0.63
Machine weight		kg	6300	7500	9000
Overall dimension(L*W*H)		mm	3800*2900*2800	4400*2900*2800	5400*2900*2800





DM7132/DM7140

Surface Grinder Machine



SPECIFICATIONS		Units	DM7132 /1000	DM7132 /1600	DM7132 /2000	DM7140 /1000	DM7140 /1600	DM7140 /2000
Table size (L*W)		mm	1000*320	1600*320	2000*320	1000*400	1600*400	2000*400
Max. Longitudinal movement	of worktable	mm	1100	1700	2100	1200	1700	2100
Max. Distance from the spindle of	centerline to the worktable	e mm	570	570	570	570	570	570
Max. Cross movement of grin	ding head	mm	350	350	350	440	440	440
Max. Vertical movement of gr	inding head	mm	400	400	400	400	400	400
Vertical movement of the Every lat	Every lattice	mm	0.01	0.01	0.01	0.01	0.01	0.01
grinding head by hand wheel	Each turn	mm	1	1	1	1	1	1
	Power	KW	0.37	0.37	0.37	0.37	0.37	0.37
Rapid lifting motor	Speed	r/min	1440	1440	1440	1440	1440	1440
T-slot of table		mm*n	18*3	18*3	18*3	18*3	18*3	18*3
Table rapid move speed		m/min	3-22	3-22	3-22	3-22	3-22	3-22
Auto feeder speed of table fro	ont and back (Stepless)	m/min	0.6-10	0.6-10	0.6-10	0.6-10	0.6-10	0.6-10
Grinding wheel size (L*D*W)		mm	350*127*40	350*127*40	350*127*40	350*127*40	350*127*40	350*127*40
Speed of grinding wheel		r/min	1440	1440	1440	1440	1440	1440
Power of spindle motor		KW	7.5	7.5	7.5	7.5	7.5	7.5
Power of oil pump motor		KW	3	4	4	3	4	5.5
Processing accuracy		mm	0.005/300	0.005/300	0.005/300	0.005/300	0.005/300	0.005/300
Surface roughness		um	Ra : 0.63	Ra : 0.63	Ra : 0.63	Ra: 0.63	Ra : 0.63	Ra : 0.63
Machine weight		kg	3600	4800	5500	3800	4800	5500
Overall dimension(L*W*H)		mm	2800*1750*2050	4600*1750*2050	5800*1750*2050	2600*1750*2050	4600*1750*2050	5800*1750*205





SPECIFICATIONS		Units	DM7150 /1250	DM7150 /1600	DM7150 /2000
Table size (L*W)		mm	1250*500	1600*500	2000*500
Max. Longitudinal movement	of worktable	mm	1350	1700	2100
Max. Distance from the spindle	centerline to the worktable	mm	800	800	800
Max. Cross movement of grind	ling head	mm	540	540	540
Max. Vertical movement of gri	nding head	mm	500	500	500
Vertical movement of the	Every lattice	mm	0.01	0.01	0.01
rinding head by hand wheel	Each turn	mm	1	1	1
	Power	KW	0.37	0.37	0.55
tapid lifting motor	Speed	r/min	1440	1440	1440
-slot of table		mm*n	18*3	18*3	18*3
able rapid move speed		m/min	3-22	3-22	3-22
Auto feeder speed of table fro	nt and back (Stepless)	m/min	0.6-10	0.6-10	0.6-10
Grinding wheel size (L*D*W)		mm	400*127*40	400*127*40	400*127*40
peed of grinding wheel		r/min	1440	1440	1440
ower of spindle motor		KW	7.5	7.5	7.5
ower of oil pump motor		KW	4	5.5	5.5
Processing accuracy		mm	0.015/1000	0.015/1000	0.015/1000
iurface roughness		um	Ra : 0.63	Ra: 0.63	Ra: 0.63
/achine weight		kg	5000	6000	7500
Overall dimension(L*W*H)		mm	3500*1750*2450	4500*2100*2450	5800*2100*2450





DMY820/DMY1022 DMY1224/ DMY1230

Surface Grinder Machine



SPECIFICATIONS			DMY820	DMY1022	DMY1224	DMY1230
Worktable size (L*W)		mm	480*200	540*250	600*300	700*300
Max. travel of table (L*W)		mm	520*200	560*250	640*320	750*340
Table T slot (slot number*s	lot width)	mm	1*14	1*14	1*14	1*14
The grinding wheel size (o.	d * w * i. d.)	mm	200*20*31.75	200*20*31.75	250*25.4*76.2	350*25.4*76.2
Distance spindle center line	to working table	mm	450	450	450	450
Grinding wheel speed		r/min	2800	2800	1440	1440
Longitudinal speed range o	f table	m/min	3-20	3-20	3-20	3-20
Transverse (front and rear)	Continuous (stepless)	m/min	150	150	150	150
feed handwheel feed	Handwheel per turn	mm	2.5	2.5	2.5	2.5
	Handwheel per lattice	mm	0.02	0.02	0.02	0.02
	Handwheel per turn	mm	1.25	1.25	1.25	1.25
feed handwheel feed	Handwheel per lattice	mm	0.01	0.01	0.01	0.01
Spindle motor power		kw	1.5	1.5	2.2	3
Power of oil pump motor		kw	1.5	1.5	1.5	1.5
Cooling motor power		kw	0.04	0.04	0.04	0.04
Processing accuracy		mm	0.005/300	0.005/300	0.005/300	0.005/300
Surface roughness		μm	Ra0.32	Ra0.32	Ra0.32	Ra0.32
Machine weight		kg	1050	1250	1500	2100
Overall dimension(L*W*H)		mm	1680*1200*1900	1780*1240*1900	1960*1630*1980	1990*1700*199

DMY4080/DMY40100

Surface Grinder Machine



SPECIFICATIONS			DMY4080	DMY40100
Worktable size (L*W)		mm	800*400	1000*400
Max. travel of table (L*W)		mm	900*450	1100*450
Table T slot (slot number*sl	ot width)	mm	3*18	3*18
The grinding wheel size (o.	d*w*i.d.)	mm	350*32*127	350*40*127
Distance spindle center line	to working table	mm	580	580
Grinding wheel speed		r/min	1450	1450
Longitudinal speed range of	table	m/min	3-20	3-20
Transverse (front and rear)	Automatic (stepless)	mm	0-8	0-8
feed handwheel feed	Handwheel per turn	mm	2.5	2.5
	Handwheel per lattice	mm	0.02	0.02
The vertical (up and down)	Handwheel per turn	mm	2	2
feed handwheel feed	Handwheel per lattice	mm	0.01	0.01
Spindle motor power		kw	5.5	5.5
Power of oil pump motor	11.	kw	2.2	2.2
Cooling motor power		kw	0.125	0.125
Processing accuracy		mm	0.005/300	0.005/300
Surface roughness		μm	Ra0.32	Ra0.32
Machine weight		kg	3200	3900
Overall dimension(L*W*H)		mm	2400*2250*2250	2400*2250*2250





DM618/DM820/DM1022

Surface Grinder Machine



SPECIFICATIONS			DM618	DM820	DM1022
Worktable size (L*W)		mm	460*180	480*200	500*250
Max. travel of table (L*W)		mm	500*190	520*200	560*250
Table T slot (slot number x s	lot width)	mm	1*14	1*14	1*14
The grinding wheel size (o.	d * w * i. d.)	mm	180*13*31.75	200*20*31.75	200*20*31.75
Distance spindle center line	to working table	mm	335	480	480
Grinding wheel speed		r/min	2800	2800	2800
Longitudinal speed range of	table	m/min	3-20	3-20	3-20
Transverse (front and rear)	Handwheel per turn	mm	2.5	2.5	4
feed handwheel feed	Handwheel per lattice	mm	0.02	0.02	0.02
The vertical (up and down)	Handwheel per turn	mm	1.25	1.25	2
feed handwheel feed	Handwheel per lattice	mm	0.01	0.01	0.01
Spindle motor power		kw	1.1	1.5	1.5
Cooling motor power		kw	0.04	0.04	0.04
Processing accuracy		mm	0.005/300	0.005/300	0.005/300
Surface roughness		μm	Ra0.32	Ra0.32	Ra0.32
Machine weight		kg	750	850	1050
Overall dimension(L*W*H)		mm	1240*1080*1780	1260*1140*1760	1280*1250*180

DMD618/DMD820/DMD1022

Surface Grinder Machine



SPECIFICATIONS			DMD618	DMD820	DMD1022
Worktable size (L*W)		mm	460*180	480*200	540*250
Max. travel of table (L*W)		mm	500*190	520*200	560*250
Table T slot (slot number x s	lot width)	mm	1*14	1*14	1*14
The grinding wheel size (o.c	d*w*i.d.)	mm	180*13*31.75	200*20*31.75	200*20*31.75
Distance spindle center line	to working table	mm	335	450	450
Grinding wheel speed		r/min	2800	2800	2800
Longitudinal speed range of	table	m/min	3-20	3-20	3-20
	Continuous (stepless)	m/min	150	150	150
Transverse (front and rear) feed handwheel feed	Handwheel per turn	mm	2.5	2.5	4
	Handwheel per lattice	mm	0.02	0.02	0.02
The vertical (up and down)	Handwheel per turn	mm	1.25	1.25	1.25
feed handwheel feed	Handwheel per lattice	mm	0.01	0.01	0.01
Spindle motor power		kw	1.1	1.5	1.5
Cooling motor power		kw	0.04	0.04	0.04
Processing accuracy		mm	0.005/300	0.005/300	0.005/300
Surface roughness		μm	Ra0.32	Ra0.32	Ra0.32
Machine weight		kg	800	900	1100
Overall dimension(L*W*H)		mm	1060*1170*1870	1680*1200*1900	1780*1240*1900





3-IN-1 Combination of Shear, Brake & Roll Machine



- ▶ Ideal combination machine for sheet metal machining to a length of 305mm and a thickness of 1.0 mm cutting stop
- ▶ Roll bending starting with diameter of 39mm

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- Folding with a max. angle of 90 °
- ► Adjustable rear stop



D3-I	N-1	11	067	x1	.5

Model	D3-IN-1/1067 x1.5	D3-IN-1/1320 x1.5
Bed width(mm)	1037	1320
Max.shearing thickness(mm)	1.5	1.5
Max.bending thickness(mm)	1.5	1.5
Max, bending angle	90°	90°
Max. rolling thickness(mm)	1.5	1.5
Min. rolling dia.(mm)	62	76
Packing size(cm)	150×59×93	179×59×93
N.W./G.W.(kg)	390/440	470/530

D3-IN-1/305

▶ Back gauge standard equipment ▶ With two position handles

▶ Shearing mild steel or equipment



Model	D3-IN-1/200	D3-IN-1/305	D3-IN-1/610	D3-IN-1/760	D3-IN-1/1016	D3-IN-1/1067	D3-IN-1/1320
Bed width(mm)	200	305	610	760	1016	1067	1320
Max.shearing thickness(mm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Max.bending thickness(mm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Max. bending angle	90°	90°	90°	90°	90°	90°	90°
Max. rolling thickness(mm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Min. rolling dia.(mm)	29	39	39	39	43	43	43
Packing size(cm)	54×24×28	49×33×42	84×41×86	100×41×66	137×45×72	139×54×78	168×54×78
N.W./G.W.(kg)	19/20	43/45	112/123	136/153	195/215	276/297	349/377

E3-IN-1 Electric Combination of Shear, Brake & Roll Machine





N.W./G.W.(kg)



DE3-IN-1/1320 Max. shearing thickness(mm) 3.0 Max. shearing width(mm) 1320 Shearing angle Number of stroke(per min) 30 450 Back-gauge range(mm) Height of worktable(mm) 760 2.0 Max.bending thickness(mm) 1320 Max.bending width(mm) 3.0 Max.rolling thickness(mm) 1500 Max.rolling width(mm) Min.rolling dia.(mm) 90 Mortor power 3.0 254×145×197 Packing size(cm)

- ▶ Combination of shear, brake & roll
- ▶ For shearing, it can achieve single stroke and continuous stroke processing function
- ▶ For bending, there are two functions: Jogging and continuous stroke
- ▶ This machine is the ideal equipment for sheet-metal working

2300/2800

SHEAR,





Electric Shearing Machine



- Manual back guage with mm-counter
- ► Cutting line lighting
- ► Mobile 24V foot switch

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- ► Automatic rubber-coated sheet hold
- ▶ Bench angle-stop



- ► PLC-control
- Cutting line lighting
- Mobile 24V foot switch
- ► Two sides shear blades
- Graphical control system with Finger touch screen
- ► Rear guarding with interlock
- ▶ Sheet hold down devices with rolling balls
- ▶ Sheet catcher, pneumatic type
- ▶ Motorized back-gauge with manual fine adjustment

Model	D11-3x1250	D11-3x2050	D11-4x1300	D11-2x2550
Max.shearing thickness(mm)	3.0	3.0	4.0	2.0
Max.shearing width(mm)	1250	2050	1300	2550
Shearing angle	2°	2°	2.4°	1.6°
No.of stroke (per ninute)	30	30	30	30
Motor power(kW)	3	4	4	4
Back gauge(mm)	630	630	630	630
Dimension(cm)	184×103×135	266×116×147	191x116x145	320x116x148
N.W./G.W.	980/1140	1520/1650	1320/1520	1900/2150

Manual Shearing Machine

- Cast iron frame
- ► With both front & back gauge
- ▶ Used for mild steel, aluminium copper, brass zinc plastic and leads
- ► High carbon and chrome steel blade





- ► Steel plate structure
- with Lower pedel
- ▶ Used for mild steel, aluminium copper, brass zinc plastic and leads
- ▶ High carbon and chrome steel blade

D01-1.5x1320A



- ▶ Used for mild steel, aluminium copper, brass zinc plastic and leads
- ► High carbon and chrome steel blade
- ► Hand control

D01-1.5x1500

Model	D01-1.0x1000	D01-1.5x1320	D01-2x1000	D01-1.5x1320A	D01-1.5x1500	D01-1.25x2000
Width (mm)	1000	1320	1000	1320	1500	2000
Max. shearing thickness (mm)	1.0	1.5	2.0	1.5	1.5	1.25
Back gauge range (mm)	0-840	0-840	0-840	0-840	0-300	0-300
Packing size (cm)	140×76×115	168×76×115	140×76×115	168×76×115	208×76×120	258×76×120
N.W./G.W.(kg)	365/410	491/545	430/490	460/520	445/515	511/600

MANUAL SHEARING

Dishaa®

Manual Folding Machine





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Features

- They have the function of air spring which can be installed inside the arm (optional)
- · Our precision folding machine is used for bending the sheet metal parts. The upper blade can be dismantled for use. It can choose a combination of upper blades according to the abnormity degree and length of the workpiece.

Model	DPB1020/2.5	DPB/1270/2	DPB1520/1.5	DPB2020/1.2	DPB2520/1.0
Max. working length(mm)	1020	1270	1520	2020	2520
Max. sheet thickness(mm)	2.5	2.0	1.5	1.2	1.0
Max. clamping bar lift(mm)	47	47	47	47	47
Folding angle	0-135°	0-135°	0-135°	0-135°	0-135°
Packing size (cm)	146X62X127	170X71X127	196X71X130	247X94X132	297X94X132
N.W/G.W(kg)	285/320	320/360	385/456	490/640	590/770

Features

- · A fully developed quick release system for the clamp beam segment ensures fast interchangeability
- · The folding beams are fitted with a counter-balance and angle stop to provide a perfect and effective operation within the full capacity of the machine
- The optional back-gauge can be easily mounted when using the pre-drilled fixing point

Model	DPB1020/2A	DPB1270/2A	DPB1520/1.5A	DPB1020/3SH	DPB1270/3SF
Max. working length (mm)	1020	1270	1520	1020	1270
Max. sheet thickness (mm)	2.0	2.0	1.5	2.0	1.5
Max. clamping bar lift (mm)	47	47	47	45	45
Folding angle	135°	135°	135°	150°	150°
Packing size(cm)	146x62x127	170x71x127	196x71x130	142x59x142	167x66x142
N.W./G.W.(kg)	320/350	350/385	395/466	430/470	465/510

Pan & Box Brake Machine



Features

- · With segment bending blade for the bending of box section.
- · Various widths segment shiftable setup.
- · With balanced hammer, it can easy to operate and easy for folding

Model		Capacity (mm)	Packing size(cm)	N.W./G.W.(kg)		
	Length	Thickness	Angle			
DW2.5X1220	1220mm(48")	2.5mm(12Ga)	0-135°	171x75x94	513 / 575	
DW2.0X2040A	2040mm(80")	2.0mm(14Ga)	0-135°	255x76x100	850/1000	
DW2.5X2040A	2040mm(80")	2.5mm(12Ga)	0-135°	255x76x100	1145/1295	
DW2.0X2540A	2540mm(100")	2.0mm(14Ga)	0-135°	300x76x100	1190/1360	
DW2.5X2540A	2540mm(100")	2.5mm(12Ga)	0-135°	300x76x100	1310/1480	
DW2.0X3050A	3050mm(120")	2.0mm(14Ga)	0-135°	350x76x110	1490/1690	
DW1.2X3700A	3700mm(146")	1.2mm(20Ga)	0-135°	425x85x120	2450/2670	
DW0.8X4000A	4000mm(157")	0.8mm(22Ga)	0-135°	470x90x120	2700/2950	

BOX BRAKE





Slip Roll Machine



- Asymmetrical roll bending machine with 3 high strength steel rolls
- Fixed top roller, adjustable lower and rear rollers
- Standard series wire core groove
- ► Top roll swing out across cam lock
- Supplied with conical bending feature





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Model	Max.rolling thickness(mm)	Max.rolling width(mm)	Dia.of roller(mm)	Motor power(kW)	Dimension(cm)	N.W./G.W.(kg)
DMER-1300x1.5	1.5	1300	75	0.75	180x65x110	280/340
DMER-1300x2.5	2.5	1300	90	1.5	200×72×120	540/600
DMER-1300x4.5	4.5	1300	120	2.2	200×76×127	750/830
DMER-1550x3.5	3.5	1550	120	2.2	222×76×127	790/890
DMER-2020x3.0	3.0	2020	127	4.0	270×87×130	1100/1200

Manual Rolling Machine








Model	Max.Thickness (mm)	Max. width (mm)	Dia.of roll (mm)	Packing size (cm)	N.W./G.W. (kg)
DMMR-2x1000	2	1000	60	155x62x118	200/240
DMMR-2x1250	2	1250	60	180x62x118	223/262
DMMR-1.5x1300	1.5	1300	75	175x45x60	235/270

MANUAL ROLL

Dishaa®

Bead Bending Machine

- ► Heavy and solid cast iron construction
- ► Special steel adjustable bottom spindle
- ► Self-braking motor with subframe(E-type)
- ► Easy to operate with foot pedal control(E-type)
- ▶ 4 sets standard rollers








Model	DBB 12	DEBB12
Thickness max	1.2mm/18Ga	1.2mm/18Ga
Cylinder length	140mm/5-1/2"	140mm/5-1/2"
Throat depth	200mm/8"	200mm/8"
Cylinder speed		32rpm
Motor power		0.75kW/1HP
Net weight	48kg/106lb	120kg/265lb
Paching(cm)	67x32x60	110x48x148

- ▶ Steel welded construction frame
- ▶ Adjustable idle roller
- Steel shaft with bronze bushings
 Reduction motor with brake system
- ► Movement of rollers with foot pedal
- ▶ Complete with stand
- ▶ 4 sets standard rollers

Model	DEBB 25	DEBB 40
Thickness max	2.5mm	4mm
THICKIESS IIIda	12Ga	8Ga
Cylinder length	120mm	165mm
	4-3/4"	6-1/2"
	280mm	300mm
Throat depth	11"	12"
Cylinder speed	20rpm	15.3rpm
Motor power	1.5kW/2HP	2.2kW/3HP
Net weight	235kg/518lb	341kg/752lb
Packing(cm)	147x58x135	165x58x140



Rotary Machine Dishaa Dishaa

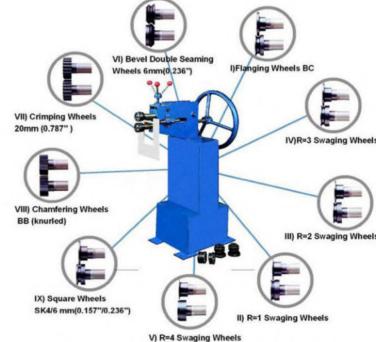

Technical Parameters

Model	Shape	Capacity (mm)	Motor (kw)	Weight (kg)	Dimension size (L.W.H)(mm)
DLX-18		1.8	2.2	145	850x450x1180
DLX-15		1.5	0.75	85	870X400X1000
DLH-10		1.0	/	50	470X615X1030

ROTARY





Bench Grinding Machine





Technical Parameters

Model	DBG3020	DBG3025	DBGQ3025	DBG3030	DBG3035	DBG3040		
Wheelsize(mm)	200x25x32	250x25x32	250x25x32	300x40x75	350x40x75	400x40x127		
Power(Kw)	0.5	0.75	1.1	1.5	1.75	2.2		
Voltage(V)			38	30				
Phase		3 Phases						
Speed(r/min)	2850	2850	2850	1440	1440	1440		
Dimensions(mm)	400x420x900	500x405x965	500x405x965	680x450x1030	690x450x1050	710x500x1075		
Weight(Kg)	37	46	48	97.5	105	113		
foot size(mm)	370x350xΦ16	350x350xΦ16	350x350xΦ16	388x428xΦ16	388x428x Φ 16	388x428xΦ16		
				_				

Model	DBG3320	DBG3325	DBG3330	DBG3335	DBG3340		
Wheelsize(mm)	200x25x32	250x25x32	300x40x75	350x40x75	400x40x127		
Power(Kw)	main motor 0.75 dust removal motor 0.75	main motor 1.5 dust removal motor 0.75	main motor 2	main motor 2.5 dust removal motor 1.1	main motor 2.7		
Voltage(V)			380				
Phase	3 Phasos						
Speed(r/min)	2800	2800	1440	1440	1440		
Dimensions(mm)	500x840x1040	540x750x1000	500x840x1100	500x840x1130	500x840x1130		
Weight(Kg)	81.5	140	226	231	270		
foot size(mm)	350x750xΦ12	322x648xΦ12	428x820x Φ 12	350x750xΦ12	350x750xΦ12		

Lock Former Machine



Model	Motor (kw)	Capacity (mm)	Shape	Weight (kg)	Dimension size (L.W.H)
DLF-10	1.5	0.3-1.0		175	920X580X890
DLF-10R	1.5	0.3-1.0		185	920X580X1020
DLF-10C	1.5	0.3-1.0	~ ~	185	920X580X1020
DLF-10E	2.2	0.3-1.0		220	1200X600X950
DLF-10B	1.5	0.3-1.0		175	920X580X880
DLF-10BR	1.5	0.3-1.0		185	920X580X1020
DLF-12	1.5	0.5-1.2		215	1050X580X880
DLF-12R	1.5	0.5-1.2		220	1050X580X1050
DLF-12B	1.5	0.5-1.2		210	1050X580X880
DLF-12BR	1.5	0.5-1.2		225	1050X580X1060
DLF-12C	1.5	0.5-1.2	~ _	210	1050X580X880
DLF-12D	1.5	0.5-1.2		215	1050X580X880
DLF-12DR	1.5	0.5-1.2		230	1050X580X1050
DLF-12M	2.2	0.5-1.2		360	1520X650X1010
DLF-12MR	2.2	0.5-1.2		370	1152X650X1050
DLF-15	2.2	0.7-1.5		280	1140X660X920
DLF-15R	2.2	0.7-1.5		305	1150X660X1080
DLF-15B	2.2	0.7-1.5		285	1150X660X920
DLF-15BR	2.2	0.7-1.5		305	1150X660X1080
DLF-15C	2.2	0.7-1.5	~	290	1150X660X1080
DLF-15D	2.2	0.7-1.5		290	1420X660X920
DLF-15DR	2.2	0.7-1.5		310	1650X660X1080
DLF-15M	2.2	0.7-1.5		360	1420X680X1160
DLF-20	3.0	0.7-2.0		435	1650X650X1050

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

LOCK FORMER





NC Pipe Bending Machine



Mechanical Characteristics

The microcomputer control is adopted with strong functions, high extensibility, English subtitles and dialogue-based operation, easy to learn and understand. Set speed by segmentation with high precision of elbow pipes. The sixteenth level elbow pipe data setting and storage, and remarkably smooth assembly of work pieces of many angles. The functions of reloading with auxiliary shoving and slowly returning the core can beachieved. The thin-wall pipes can be bent and manufactured. Extensively used in large ship building and repair, boiler, petroleum pipeline and auto spare parts.

	DMP168NC	DMP219NC	DMP325NC	DMP400NC
Min bending R for carbon pipe is:1.5D	ø168x14.0t	ø219x18.0t	ø325x20.0t	ø400x22.0t
Min bending R for S.S pipe is:1.5D	ø135x10.0t	ø168x10.0t	ø275x12.0t	ø325x14.0t
Availability length of bending pipe	3600mm	4000mm	4500mm	4500mm
Max R for bending	550mm	700mm	1000mm	1150mm
Max angle for bending	185°	185°	185"	185°
Bending process for every pipe	16	16	16	16
Oil pressure	14mpa	14mpa	14mpa	14mpa
Electrical motor power	30kw	45kw	55kw	55/75kw
Weight	12000kg	18000kg	21000kg	27000kg
Size (LxWxH)(cm)	630x250x130	690x225x175	720x230x180	730x230x185







COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



Mechanical Characteristics

Adopt PLC+ touch screen control imported form Taiwan and Chinese-English subtitles with easy operation. Adopt servo motor imported from Japan + Taiwan reduction gears, accurately segment precision, set speed of elbow pipe with its high precision. The angle of elbow pipe can be set for many times in the sixteenth level elbow pipe data setting and storage. The thin-wall pipes can be bent and manufactured. Adopt manual feeding materials, set the length of feeding materials with limited block, and automatically adjust the pipe angle, with accurate precision and extremely high cost performance.

	DMP38NCBL	DMP50NCBL	DMP63NCBL	DMP75NCBL	DMP89NCBL	DMP115NCBL	DMP130NCBL	DMP168NCBL
Min bending R for carbon pipe is:1.5D	ø38.1x2.0t	ø50.8x2.0t	ø63.5x2.1t	ø76.2x2.5t	ø88.9x3.0t	ø115x6.0t	ø130x8.0t	ø168x10t
Min bending R for S.S pipe is:1.5D	ø31.7x1.5t	ø34x2.2t	ø38x2.0t	ø51x2.0t	ø57x2t	ø89x2.0t	ø102x3.5t	ø133x6t
Manual feed distance	2100mm	2200mm	2200mm	2200mm	2500mm	2700mm	2800mm	4500mm
*Max R for bending	175mm	200mm	200mm	300mm	300mm	500mm	500mm	550mm
*Max angle for bending	185°	185°	185°	185°	185°	185°	185°	185°
Bending process for every pipe	16	16	16	16	16	16	16	8
Oil pressure	12mpa	14mpa	14mpa	14mpa	14mpa	14mpa	14mpa	14mpa
Electrical motor power	4kw	5.5kw	5.5kw	7.5kw	11kw	22kw	22kw	30kw
Weight	1150kg	1500kg	1600kg	2700kg	2850kg	8000kg	11000kg	12500kg
Size (LxWxH) (cm)	380x100x130	390x80x140	410x90x130	450x90x120	480x118x130	530x160x140	540x180x140	630x250x130

*Can be customized











BENDING





NC Pipe Bending Machine



	DMP25NC	DMP38NC	DMP50NC	DMP63NC
Min bending R for carbon pipe is:1.5D	ø25.1x1.5t	ø38.1x2.0t	ø50.8x2.0t	ø63.5x2.5t
Min bending R for S.S pipe is:1.5D	ø22.1x1,5t	ø31.75x1.5t	ø35x2.2t	ø38x2.0t
Availability length of bending pipe	1450mm	1800mm	2200mm	3100mm
Max R for bending	90mm	175mm	200mm	220mm
Max angle for bending	185"	185°	185°	185°
Bending process for every pipe	16	16	16	16
Oil pressure	12mpa	14mpa	14mpa	14mpa
Electrical motor power	3kw	4kw	5.5kw	5.5kw
Weight	850kg	1200kg	1350kg	1500kg
Size	230x70x110	260x73x123	310x75x120	320x80x130





	DMP75NC	DMP89NC	DMP115NC	DMP130NC
Min bending R for carbon pipe is:1.5D	ø76.2x3.0t	ø88.9x3.0t	ø115x6.0t	ø130x8.0t
Min bending R for S.S pipe is:1.5D	ø51x2t	ø57x2t	ø88.9x2.0t	ø102x3.0t
Availability length of bending pipe	3100mm	3500mm	3600mm	3700mm
Max R for bending	280mm	300mm	500mm	500mm
Max angle for bending	185°	185°	185°	185°
Bending process for every pipe	16	16	16	16
Oil pressure	14mpa	14mpa	14mpa	14mpa
Electrical motor power	7.5kw	11kw	22kw	22kw
Weight	2500kg	3050kg	7000kg	8500kg
Size (LxWxH) (cm)	450x110x150	480x120x130	530x160x140	540x180x140









COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

NC PIPE





CNC Pipe Bending Machine



Properties

Automatic identification of dynamic characteristics of machine tool/work piece-rapid and good processing;

Return the core and boost with trolley---improve the appearance of corner piece.

The Chinese operation prompts +15 inch true color display + touch screen-simple and clear operation.

The graphical programming system: the processing procedure can be obtained upon the vertical tube painting system/modification on the screen – simple, convenient, rapid and accurate programming.

Resilience measurement- the property of batches of pipes can be compared and measured.

Single-step debugging function - the deformation process of pipes is observed closely during mould trial-manufacture.

Automatic mould drawing --- help significantly develop new products.

Comprehensive monitoring: Hydraulic/electrical/drive system, motor phase loss/reversal, voltage, temperature, oil pressure, automatic fault diagnosis, passwords, key, records of working hours/number, for production management.

		DMP25 CNC-2A-1S	DMP38 CNC-2A-1S	DMP50 CNC-2A-1S	DMP63 CNC-2A-1S	DMP75 CNC-2A-1S	DMP89 CNC-2A-1S
Min bending R for carbon p	pe is 1.5D	ø25.1x1,6t	ø38.1x2.0t	ø50.8x2.0t	ø63.5x2.0t	ø76.2x2.0t	ø88.9x2.0t
Max feed distance		1300mm	2100mm	2400mm	2500mm	2800mm	3000mm
Feeding method			S	ervo motor			
Max R for bending		175mm	175mm	250mm	250mm	300mm	300mm
Max angle for bending		185"	185	185	185°	185"	185"
Bending process for ev	erypipe	16	16	16	16	16	16
Max bending group		200	200	200	200	200	200
	Bending Rate	Max.45.	Max.45	Max.40	Max.35	Max.30	Max.25
	Rotary Rate	Max.270	Max.270	Max.270	Max.270.	Max.180	Max.180
working rate	Feeding Rate	Max.700	Max.700	Max.700	Max.700	Max.600	Max.600
	Bending Angle	± 0.15°	±0.15°	±0.15°	±0.15°	± 0.15°	±0.15°
	Rotary Angle	±0.1°	±0.1°	±0.1=	±0.1°	±0.1°	± 0.1"
working Accuracy	Feeding Length	±0.1mm	±0.1mm	±0.1mm	±0.1mm	±0.1mm	±0.1mm
Data Input Method		(Y.B.C)	(Y.B.C)	(Y.B.C)	(Y.B.C)	(Y.B.C)	(Y.B.C)
Rotary Servo motor Po	wer	400w	850w	850w	850w	1300w	1300w
Feeding Servo motor P		750w	1300w	1300kw	1300kw	2000kw	2000kw
Electric Motor Powre		4Kw	4Kw	5.5Kw	5.5Kw	7.5Kw	11Kw
Weight		1000kg	2100kg	2500kg	2800kg	3600kg	3800kg
Size (LxWxH) (cm)		250x60x120	380x100x130	430x90x130	430x90x140	510x120x140	530x120x140







COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS




DMP25CNC-3A-2S 25/38/50/63/75/89/115/130/168/219

		DMP25CNC-3A-2S	DMP38CNC-3A-2S	DMP50CNC-3A-2S	DMP63CNC-3A-2S	DMP75CNC-3A-2S	DMP89CNC-3A-2S
Min bending R for carbon pip	e is:1.5D	ø25.1x1.6t	ø38.1x2.0t	ø50.8x2.0t	ø63.5x2.0t	ø76.2x2.0t	ø88.9x2.0t
Max feed distance		1300mm	2100mm	2400mm	2500mm	2800mm	3000mm
Feeding method		1					
Max R for bending		175mm	175mm	250mm	250mm	300mm	300mm
Max angle for bendir	ng	185	185*	185*	185*	185°	185*
Bending process for o	every pipe	16	16	16	16	16	16
Max bending group		500	500	500	500	500	500
	Bending Rate	Max.45	Max.45	Max.40	Max.35	Max.30	Max.25
	Rotary Rate	Max.270	Max.270	Max.270	Max.270	Max.180	Max.180
working rate	Feeding Rate	Max.900	Max.900	Max.900	Max.900	Max.700	Max.700
	Bending Angle	±0.15°	±0.15°	± 0.15°	±0.15°	±0.15°	± 0.15°
	Rotary Angle	±0.1°	±0.1°	±0.1°	±0.1°	±0.1°	± 0.1°
working Accuracy	Feeding Length	±0.1mm	±0.1mm	±0.1mm	±0.1mm	± 0.1mm	± 0.1mm
Data Input Method		(Y.B.C)	(Y.B.C)	(Y.B.C)	(Y.B.C)	(Y.B.C)	(Y.B.C)
Rotary Servo motor Po	ower	400w	850w	850w	850w	850w	1300w
Feeding Servo motor	Power	850kw	1.0kw	1.0kw	1.5kw	2kw	2kw
Electric Motor Power		4kw	4kw	5.5kw	5.5kw	7.5kw	11kw
Weight		1100kg	2100kg	2400kg	2800kg	3800kg	4200kg
Size (LxWxH) (cm)		280x70x130	400x110x130	430×100×150	450x100x150	520x120x140	560x120x160









CNC PIPE





CNC Pipe Bending Machine



DMP38CNC-5A-3S


25/38/50/63/75/89/115/130/168

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

			CNC-5A-3S CNC-5A-4S	1.DMP38CNC-5A-3S 2.DMP38CNC-5A-4S	1.DMP50CNC-5A-3S 2.DMP50CNC-5A-4S
Max bending capa	city	ø25mr	mx1.6mm	ø38mmx2mm	ø50mmx3mm
Max R for bending		R1	00mm	R180mm	R250mm
Max feeding distan	ce	22	00mm	2500mm	3000mm
Max angle for bend	ling		190"	190"	190°
	Bending speed	Max.:	200	Max.150	Max.85
	Rotary speed	Max.200		Max.200	Max.200
	Feeding speed	Max.1000mm		Max.1000mm	Max.1000mm
	Bending Angle	± 0.1°		± 0.1°	± 0.1°
	Rotary Angle	± 0.1°		± 0.1°	± 0.1°
working Accuracy	Feeding Length	±0.1mm		± 0.1mm	±0.1mm
Data Input Method		1.(X.Y.Z)	2.(Y.B.C)	1.(X.Y.Z) 2.(Y.B.C)	1.(X,Y,Z) 2.(Y,B,C)
Bending method		1	2kw	5kw	1.: 5kw
Rotary Servo motor Po	ower	4	00w	750w	750w
Feeding Servo motor F	Power	7	50w	1kw	1kw
Max bends every pipe		1.16 (P	PLC) 2.33	1.16(PLC) 2.33	1.16 (PLC) 2.33
Max bending storage		1.1000 (P	PLC) 2.2	1.1000(PLC) 2.2	1.1000 (PLC) 2.2
Electril motor power		3	3kw	4kw	5.5kw
Maximum system pressure (adjustable)		12	2Мра	12Mpa	12Mpa
Bending mold gap		Max	.35mm	Max.50mm	Max.75mm
Weight		10	00kg	1500kg	3500kg
Size (cm)		320x	c75x110	450x90x140	460x110x150









DMP130CNC-6A-4S

25/38/50/63/75/89/115/130/168

Properties

Multi-S series pipe bender is a multi-mode pipe bender, which is equipped with servo motor or proportional servo valve based on different models and is capable of multi-axis control, with bending capacity less than 325mm in pipe diameter. According to different user needs, multiple bending capacities can be provided, for example, elbow boosting of 1D materials and end boosting skill. Manufacturing of spare parts for such industries as parts necessary for auto industry, healthy sports equipment, furniture, medical apparatus and instruments, engineering construction machinery and other industries.

Four sets of moulds can be simultaneously loaded to rapidly install and replace different bending radii; servo control system, small amount of hydraulic oil, and oil temperature not too high 1-4 layers of bending moulds can be added to CNC5 axis motor servo control; early pulling of core can be set for core rod

Each layer of moulds can independently control auxiliary boosting speed of guided mould; equipped with adjustable wrinkle-proof plate holder CNC numerical value controls andmatches high mechanical accuracy, and improves bending speed and accuracy Direct feeding or feeding by clamping can be chosen

Equipped with IPC (industrial computer) and touch control screen

Can be equipped with interference simulation software, and the operator can input parameters to view if there is any collision or error (optional)

		DMP63CNC-5A-3S	DMP75CNC-5A-3S	DMP89CNC-5A-3S	DMP115CNC-5A-38
Max bending capacit	у	ø63mmx4mm	ø75mmx4mm	ø89mmx8mm	ø115mmx8mm
(1) Max R for bending		R250mm	R250mm	R250mm	R350mm
(2) Min bending radius					
Max angle for bendin	g	190°	190°	190°	190°
(3) Max feeding distance)	3000mm	3000mm	3000mm	3000mm
Fedding method					
	Bending speed	Max.85	Max.40	Max.30	Max.30
working speed	Rotary speed	Max.200	Max.160	Max.160	Max.160
working speed	Feeding speed	Max.1000mm	Max.800mm	Max.800mm	Max.800mm
	Bending Angle	± 0.1°	± 0.1°	±0.1°	± 0.1"
working Accuracy	Rotary Angle	± 0.1°	±0.1°	±0.1°	±0.1°
WORKING MUCURISICS	FeedingLength	± 0.1mm	±0,1mm	±0.1mm	± 0.1mm
Data Input Method		1.(X.Y.Z) 2.(Y.B.C)	1.(X.Y.Z) 2.(Y.B.C)	1.(X.Y.Z) 2.(Y.B.C)	1. (X.Y.Z) 2.(Y.B.C)
Bending method		1kw	2kw	5kw	5kw
Rotary Servo motor Pow	ver	750w	1kw	1.5kw	1.5kw
Feeding Servo motor Po	WE.	1kw	1.5kw	2kw	3.5kw
Max bends every pipe			1.16 (PLC)	2. 33	
(4) Max bending storage			1.1000 (PLC)	2. 2	
Electril motor power		5.5kw	7.5kw	11kw	22kw
Maximum system pressure (adjustable)		12Mpa	12Mpa	14Mpa	14Mpa
(5) Bending mold gap		Max80mm	Max90mm	Max100mm	Max110mm
Weight		3800kg	4500kg	5500kg	8000kg
Size (cm)		5200x1300x1750	5200x1350x1230	5650x1350x1360	5700x1350x1400

NC PIPE





Manual Hydraulic Pipe Bending Machine






- · Simple manual hydraulic operation for easy use.
- · Completely manual hydraulic operation so external power is not needed.
- . Heavy-duty hydraulic cylinder capable of bending schedule 40 pipe.
- · Cold bending pipes only in one turn. Up to 90 degree, hydraulic equipment makes more precise bending.
- Pipe stands are also included for better bending experience.
- Suitable for cold bending of thick-walled pipes(gas, water and steam pipes, nonheated black iron pipes, galvanized pipes), up to 90°



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



Bending illustration

Specifications

Model No.	Max	Max stroke	Bending dies	Pipe wall thickness	G. W.	Dimension
DPB-2J	13T	250mm	1/2", 3/4", 1", 1 1/4", 1 1/2", 2"	2.75-4.5mm	53kg	73×32×20cm
DPB-3J	20T	290mm	1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3"	2.75-5mm	105kg	94×40×21cm
DPB-4J	23T	370mm	1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4"	2.75-6mm	155kg	118×46×23cm

Electric Hydraulic Pipe Bending Machine



Product Description

- . Electric hydraulic bender up to 4" pipe.
- . Using range: applicable to general pipe, conductor pipe, gas pipe, the thick steel pipe, etc., bending angle up to 90 degree.
- · All bending dies are made of cast iron than ordinary grey cast iron. With high strength, good toughness and plasticity, more resistant to use, not easy to break.
- · Fast setup and disassembly, convenient removing with bottom wheels.
- · Stands are optional instead of bottom wheels.
- . Equipped with HL-630A one-way pumps for single-acting applications.
- . Suitable for cold bending of thick-walled pipes(gas, water and steam pipes, nonheated black iron pipes, galvanized pipes), up to 90°



optional tripod stand

Specifications

Model No.	Max pressure	Max stroke	Pump	Bending dies	Pipe wall thickness	G. W.	Dimension
DPB-2D	13T	250mm	750W	1/2", 3/4", 1", 1 1/4", 1 1/2", 2"	2.75-4.5mm	74kg	96×35×27cm
DPB-3D	20T	290mm	750W	1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3"	2.75-5mm	126kg	118×46×27cm
DPB-4D	23T	370mm	750W	1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4"	2.75-6mm	174kg	118×46×32cm





Profile Bending Machine




Model	DRB	M10
	Size(mm)	Min Dia.(mm)
Max. capacity (mm)	20x5 30x10	190 500
(one set standard roller)	20x5 50x10	160 400
	10x10 20x20	160 500
Packing size (cm)	50x48x68(body)	87x77x34(stand)
N.W./G.W.	153/170kg	

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

- ► Special cast frame
- ► Shafts are hardened with special steel material
- ▶ Rollers are special steel material hardened and grounded
- ▶ Gears milled with full material
- ▶ Optional rollers for choice



▶ Horizontal operation ▶ With standard foot pedal





Model		DRBM30		
Dia. of roller		30mm		
Power		1.1kW/	1.5HP	
Spindle speed		9r/r	nin	
Packing size		82x62x	126cm	
N.W./G.W.		270/32	20kgs	
Capacity	Size	Min dia.(mm)	Article No.	
0-0	⊄20x1	500	391001-01	
00	⊄30x1	800	391001-02	
	¢16	400	391001-01	
	20x20x1	800	391001-03	
	30x30x1	900	391001-04	
	20x10	320	391001-05	
	30x10	320	391001-05	





DRBM30HV

- ▶ Horizontal and vertical operation
- ▶ With standard foot pedal

Model		DRB	МЗОНУ		
Dia. of roller		30mm			
Power		0.75kW/1HP			
Spindle speed		9r/min			
Packing size		120X75X12	21cm		
N.W./G.W.		244/282kg	3		
Capacity	Size (mm)	Min dia. (mm)	Article No.		
	40x40x3	1000			
	50x15	350	one set standard rolle		
	50x30x3	1200			
	Ф15 Ф20 Ф25 Ф30	600	HV30-15-4		
	40x40x2 40x40x3 40x40x4 40x40x5	400	HV30-15-5		
	40x40x2 40x40x3 40x40x4 40x40x5	400	HV30-15-6		
	50x50x2 50x50x3 50x50x4 50x50x5	400	HV30-15-7		
	50x25x2 50x25x3 50x25x4 50x25x5	300	HV30-15-8		
	50x25x2 50x25x3 50x25x4 50x25x5	400	HV30-15-9		
	50x25x2 50x25x3 50x25x4 50x25x5	300	HV30-15-10		
00	Ф35х2 Ф40х2 Ф45х2 Ф50х2 Ф55х2 Ф60х2	1000	HV30-15-11		





Profile Bending Machine



DRBM40HV



DRBM50

Model	DRBM40HV		DRBM50	
Dia. of roller(mm)	Ф40		Ф50	
Power	1.5kV	V/2HP	2.2kW/3HP	
Spindle speed	9.3	r/min	13	r/min
Packing size (cm)	127X8	39X158	100	X82X155
N.W./G.W. (kg)	4	25/495		450/582
Capacity	Size(mm)	Min Dia.(mm)	Size(mm)	Min Dia.(mm)
	50x10	600	60x10	500
	20x6	800	40x10	650
	60x20	800	100x15	920
	30x6	1250	60x10	1150
	30x30	650	35x35	600
	10x10	1100	20x20	780
	50x6	600	60x7	750
	30x3	500	50x5	500
	50x6	600	60x7	750
	30x3	500	50x5	700
	60x40x6	600	80x45x6	600
	30x15x4	900	65x40x5	550
	60x40x6	600	80x45x6	650
	30x15x4	900	65x40x5	550
	50x5	500	60x5	500
	30x4	500	50x5	500
	50x5	500	60x5	700
	30x4	500	50x5	700
	Ф30	650	Ф35	600
	Ф10	1100	Ф30	650
	50x50x2.5	700	60x60x3	600
	30x30x2	800	40x40x3	500
	50x25x2.5	800	70x50x3	1200
	40x20x2	1000	50x40x3	800

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

▶ Special Roller

Model	DRBM40HV		DRBM50		
Profile	Size(mm)	Min Dia.(mm)	Size(mm)	Min Dia.(mm)	
00	30x2 35x2 40x2 45x2 50x2 55x2 60x2 65x2 70x2	700	30x2 35x2 40x2 45x2 50x2 55x2 60x2 65x2 70x2	600	

We can design the rollers for you as per your special requirements. And we can make the rollers in various materials such as nylon.

Model	DHRBM65			
Dia. of roller(mm)	Ф65			
Power	2.2	25kW		
Spindle speed	9.3	r/min		
Packing size (cm)	125x1	15x180		
N.W./G.W. (kg)	720	/920		
Capacity	Size(mm)	Min Dia.(mm)		
	80x25 40x10	600 500		
	120x25 50x10	600 400		
	50 20	600 400		
	80x40x7 40x40x5	500 400		
	80x40x7 40x40x5	400 360		
	100x50x6 50x40x5	600 500		
Tra and	100x50x6 50x40x5	600 500		
	70x6 40x5	500 400		
	70x6 40x5	600 500		
	Ф50 Ф20	600 400		
	70x70x3 30x30x3	900 500		
	80x40x3 50x30x2	800 500		

[·] All the above processing capacities can be finished by one set of standard combination roller

· Special Roller

Model	DRE	3M40HV
Profile	Size	Min Dia (mm)
	3-1/2" x 2"	900
	2-1/8" x 2"	500
00	Φ100 x 2mm	1000
	Ф60 x 2mm	500

We can design the rollers for you as per your special requirements. And we can make the rollers in various materials such as nylon.



- ► Steel-welded construction frame
- ▶ with hydraulic motor
- Mobile control panel
- ► Top roll hydraulic moveable
- ► One standard combination roller
- ▶ Horizontal and Vertical working position

All the above processing capacities can be finished by one set of standard combination roller





Threading Machine



Model No.	Description	Power Watts	Natts Spindle Speed RPM	Pipe Thread	N.W (kg)	
inioudi ito:	Doscription	1 over water		in.	mm.	1111 (119)
SQ50B1	110V, 60Hz	750	23	1/2-2	15-50	60
SQ50B1	220V, 50Hz	750	23	1/2-2	15-50	60
SQ80D1	110V, 60Hz	750	26/11	1/2-3	15-80	100
SQ80D1	220V, 50Hz	750	26/11	1/2-3	15-80	100
SQ100D1	110V, 60Hz	750	24/10	1/2-4	15-100	140
SQ100D1	220V, 50Hz	750	24/10	1/2-4	15-100	140
SQ50C1	110V, 60Hz	900	23	1/2-2	15-50	60
SQ50C1	220V, 50Hz	900	23	1/2-2	15-50	60
SQ80D	110V, 60Hz	900	26/11	1/2-3	15-80	100
SQ80D	220V, 50Hz	900	26/11	1/2-3	15-80	100
SQ100D	110V, 60Hz	900	24/10	1/2-4	15-100	140
SQ100D	220V, 50Hz	900	24/10	1/2-4	15-100	140
SQ50A	110V, 60Hz	1000	28	1/2-2	15-50	60
S050A	220V, 50Hz	1000	28	1/2-2	15-50	60
SQ80A	110V, 60Hz	1100	28/14	1/2-3	15-80	100
SQ80A	220V, 50Hz	1100	28/14	1/2-3	15-80	100
SQ100A	110V, 60Hz	1100	28/12	1/2-4	15-100	140
SQ100A	220V, 50Hz	1100	28/12	1/2-4	15-100	140

Pipe Support Stand













• 1107X and 1109X are the more heavy-duty adjustable pipe stands which are upgraded from 1107 and 1109. The screw-like elevator tube and thicker lock ring bring more higher Max. Loading Weight capacity for the stands to make them suitable for supporting more heavy pipes or solid bars safely.

• The heavy-duty adjustable pipe stands are available in many applications with capacity from 1/8"-12"

(3mm-300mm); suitable for use with threading machine, roll groovers, etc.



V Head Pipe Stands

Model No. Descri	Description	Height Adjustment Low-High			. Pipe acity	Max. \	Veight acity	N.W
		in.	cm	in.	mm	lb.	kg	kg
1107	V Head High Pipe Stand	28-52	71-132	12	300	2500	1134	14.5
1107S	V Head Low Pipe Stand	24-40	61-102	12	300	2500	1134	11.5
1107X	V Head High Pipe Stand	28-52	71-132	12	300	4000	1814	14.5

Roller Head Pipe Stand

Model No.	Description	Height Adjustment Low-High				Max. Weight Capacity		N.W
Stores en Philippi		in.	cm	in.	mm	lb.	kg	kg
1109	Roller Head Pipe Stand	32-55	82-140	12	300	1000	454	15
1109X	Roller Head Pipe Stand	32-55	82-140	12	300	2500	1134	15

Ball Transfer Head

Model No.	Description	Max. Pipe Capacity		Max. Weight Capacity		N.W	
		in.	mm	lb.	kg	kg	
A	Ball Transfer Head only	12	300	1000	454	1.5	
В	Ball Transfer Head only	12	300	2000	900	2.8	

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

IPE SUPPORT STAND





Material Handling Equipment

HAND PALLET TRUCK



MODEL		2500	3000	5000	
Capacity	Kg	2500	3000	5000	
Min. fork height	Mm	8	0	100	
Max. fork height	Mm	19	90	210	
Steering wheel	Mm	Nylo	n/PU	180x60	
Load roller	Mm	Nylon/PU		88x106	
Each fork width	Mm	150		180	
Each fork thickness	Mm	3	4	5	
Width	Mm	550/685		700	
Length	Mm	1150/1220		1310	
Weight	Kg	68	75	200	

SEMI ELECTRIC STACKER











Joystick

Operating Pannel

Foot Brake

Customized Leg (Optional)

MODEL				DSM-10 DSM-15 DSM-20
Features	Drive system			Battery
	Driving mode			Standing
	Load Capacity	Q	Kg	1000/1500/2000
	Load Center	С	mm	500
Weight	Weight(With battery)		Kg	345/390/410/430
Wheel	Material			PU/NYLON
Size	Lifting Height	H3	mm	1600/2000/2500/3000/3500
	Lowest Mast	H1	mm	2090/1590/1840/2090/2340
	Max.Height when operating	H4	mm	2090/2740/3240/3740/4240
	Min. Height of Fork	s	mm	85
	Length	L	mm	1740
	Width	В	mm	770
	Fork Length	L1	mm	1070
	Fork Outside Width	B1	mm	550/680
	Fork Inside Width	B2	mm	305
	Min.Turning Radius	Wa	mm	1500
	Wheelbase	Y	mm	1420
Motor	Lifting Motor		KW	DC/2.2
Battery	Capacity	V/Ah		12/120

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Material Handling Equipment

FULL ELECTRIC WALKIE STACKER

- · With explosion-proof valve at the bottom of cylinder, even if the pipe burst, the mast will not rapidly decline.
- There is a turtle speed control button on the behind of control handle, which is more economic when operating.
- Curtis controller.
- Operating handle is on the side, allowing operators to work with greater vision.





COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS

Optional Configuration

- · Customized length of fork & width of legs
- Forged fork
- Specially used in cold storage area.







Operating Panel



Customized Led (Optional)

Model				CDD I-12 CDD II -16	
Features	Motor			Electric(Battery)	
	Driving Mode			Walkie	
	Load Capacity		Q(kg)	1200/1600	
	Load Center		C(mm)	500	
Weight	Weight (with	CDD I-12	Kg	470/485/505/520	
	battery)	CDD II-16	Kg	495/510/532/553	
Wheel	Wheel Materia	al		polyurethane	
Size	Lift Height		h3(mm)	1600/2000/2500/3000	
	Lowered Mast	: Height	h1(mm)	2080/1580/1830/2080	
	Max. Mast Height when operating		h4(mm)	2080/2730/3230/3730	
	Lowest fork height		S(mm)	≤90	
	Length		L(mm)	1770	
	Width		B(mm)	850	
	Fork Length		L1(mm)	1070	
	Wheelbase		Y(mm)	1250	
	Fork Outside V	Vidth	B1(mm)	680	
	Fork Inside Wi	dth	B2(mm)	305	
	Min. Turning F	Radius	Wa(mm)	1390	
Parameter	Drive Speed, E	mpty/Full load	mm/s	5.0/5.0	
	Lift Speed, Em	pty/Full load	mm/s	140/135	
	Lift Speed, Em	pty/Full load	mm/s	150/155	
	Maximum grad	dient, Empty/ Full loa	d %	7/5	
	Service brake		•	Electromagnetic	
Motor	Drive motor			DC	
	Power		Kw	0.75	
	Lifting motor			DC	
	Power		Kw	2.2	
Battery	Voltage		V	DC24V	
	Capacity		Ah	2*70/2*80	
Others	Noise Level DI	N12053	dB	< 70	





Full Electric Stacker

Performance

- AC drive motor, no carbon brushes, free maintenance reducing maintenance
- · Vertical drive motor make the inspection and repair more conveninent, which perform much better than the horizontal motor-
- The design of integrated micro-switches, easy for replacement.
- · Battery cover is easy to open, convenient to add distilled water or electrolyte of the battery.
- · Display with hour time and battery status, to remind the operator to charge battery in time.
- Controller self-diagnosis system makes troblueshooting easier-



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS





Customised Leg (Optional)



Operating Pannel



Foot Brake



Foot Pedal

Model			CDD 12 CDD16 CDD20
	Drive System		Battery
Features	Driving Mode		Standing
	Load Capacity	Q(kg)	1200/1600/2000
	Load center	C(mm)	500
Weight	Weight (with battery)	kg	830/880/910/940/970
Wheels	Material		PU
	Lifting Height	H3(mm)	1600/2000/2500/3000/3500/4000/4500
	Lowest Mast	H1(mm)	2080/1580/1830/2080/2330/1820/2020
	Max. Height when operating	H4(mm)	2080/2730/3230/3730/4230/4460/4960
	Min. Height of Fork	S(mm)	≤90
	Length	L(mm)	2130
Size	Width	B(mm)	850
Size	Fork Length	L2(mm)	1070
	Wheelbase	Y(mm)	1430
	Fork Outside width	B1(mm)	550/680
	Fork Inside width	B2(mm)	225/355
	Min. Turning Radius	Wa(mm)	1738/2099
	Driving Speed (Empty/ Full Load)	mm/s	6.5/5.0
	Lifting Speed (Empty/Full Load)	mm/s	80/50
Performance Data	Descending Speed (Empty/Full Load)	mm/s	120
	Max. Gradient (Empty/Full Load)	%	6
	Brake		Electromagnetic brake
	Driving Motor	KW	DC/0.75/1.2/1.5
Battery	Lifting Motor	KW	DC/2
	Capacity	V/Ah	24/210





Counter balanced Stacker

Performance

- · EPS System is light and flexible, has good control performance and reduces operator fatigue.
- · H-type portal frame is more robust and stable.
- · Fork has forward and backward tilting function, which is beneficial to load/unload and stack goods-
- Higher ground clearance ensures better climbing ability.
- · Automatic deceleration when turning, more safe and reli-
- Wiring neat, easy to maintain, hard to bend over-







Control Handle

Operating Pannel





Foot Pedal

Forged Fork



- Side Shifter

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



	Model		CPD 10 CPD15
	Drive System		Battery
	Driving Mode		RIDE-ON
Features	Load Capacity	Kg	1000/500
	Load Center	mm	500
	Weight (with battery)	Kg	1350/1430/1510/1590
Weight	Material		PU
-	Lifting height	mm	1600/2000/2500/3000
Wheels	Lowest mast	mm	2080/1580/1830/2080
	Max. Height when operating	mm	2080/2730/3230/3730
	Min. height of fork	mm	80
	Length	mm	2955
	Width	mm	1100
	Fork Length	mm	1070
Size	Wheelbase	mm	1500
	Fork outside width	mm	680
	Fork inside width	mm	480
	Min. Turning Radius	mm	1850
	Driving Speed (Empty/Full Load)	mm/s	5.0/4.0
	Lifting Speed (Empty/Full Load)	mm/s	80/50
erformance data	Descending Speed (Empty/Full Load)	mm/s	75/80
	Max- Gradient (Empty/Full Load)	•	5
	Brake		Electromagnetic brake
	Driving Motor	KW	DC/1.5
	Lifting Motor	KW	DC/2.2
Battery	Capacity	V/AH	24/210





Full Electric Stacker

Performance

- AC drive motor, no carbon brushes, free maintenance reducing maintenance
- Vertical drive motor make the inspection and repair more conveninent, which perform much better than the horizontal motor-
- The design of integrated micro-switches, easy for replacement.
- · Battery cover is easy to open, convenient to add distilled water or electrolyte of the battery.
- · Display with hour time and battery status, to remind the operator to charge battery in time.
- Controller self-diagnosis system makes troblueshooting easier.



COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS









Operating Pannel



Foot Brake



Foot Pedal

Model			CDD 12	CDD16	CDD20
Features	Drive System		Battery		
	Driving Mode		Standing		
	Load Capacity	Q(kg)	1200/1600/2000		
	Load center	C(mm)	500		
Weight	Weight (with battery)	kg	830/880/910/940/970		
Wheels	Material		PU		
Size	Lifting Height	H3(mm)	1600/2000	/2500/3000/	/3500/4000/4500
	Lowest Mast	H1(mm)	2080/1580)/1830/2080,	/2330/1820/2020
	Max. Height when operating	H4(mm)	2080/2730)/3230/3730,	/4230/4460/4960
	Min. Height of Fork	S(mm)	≤90		
	Length	L(mm)	2130		
	Width	B(mm)	850		
	Fork Length	L2(mm)	1070		
	Wheelbase	Y(mm)	1430		
	Fork Outside width	B1(mm)	550/680		
	Fork Inside width	B2(mm)	225/355		
	Min. Turning Radius	Wa(mm)	1738/2099		
Performance Data	Driving Speed (Empty/ Full Load)	mm/s	6.5/5.0		
	Lifting Speed (Empty/Full Load)	mm/s	80/50		
	Descending Speed (Empty/Full Load)	mm/s	120		
	Max. Gradient (Empty/Full Load)	%	6		
	Brake		Electroma	agnetic brake	9
Battery	Driving Motor	KW	DC/0.75/	1.2/1.5	
	Lifting Motor	KW	DC/2		
	Capacity	V/Ah	24/210		





Counter balanced Stacker

Performance

- EPS System is light and flexible, has good control performance and reduces operator fatigue.
- H-type portal frame is more robust and stable.
- Fork has forward and backward tilting function, which is beneficial to load/unload and stack goods.
- Higher ground clearance ensures better climbing ability.
- · Automatic deceleration when turning, more safe and reli-
- Wiring neat, easy to maintain, hard to bend over-







Control Handle

Operating Pannel





Foot Pedal

Forged Fork



- Side Shifter

COMPLETE FACTORY SET-UP TURNKEY SOLUTIONS



	Model		CPD 10 CPD15
Features	Drive System		Battery
	Driving Mode		RIDE-ON
	Load Capacity	Kg	1000/500
	Load Center	mm	500
	Weight (with battery)	Kg	1350/1430/1510/1590
Weight	Material		PU
	Lifting height	mm	1600/2000/2500/3000
Wheels	Lowest mast	mm	2080/1580/1830/2080
	Max. Height when operating	mm	2080/2730/3230/3730
	Min. height of fork	mm	80
	Length	mm	2955
	Width	mm	1100
	Fork Length	mm	1070
Size	Wheelbase	mm	1500
	Fork outside width	mm	680
	Fork inside width	mm	480
	Min. Turning Radius	mm	1850
	Driving Speed (Empty/Full Load)	mm/s	5.0/4.0
	Lifting Speed (Empty/Full Load)	mm/s	80/50
Performance data	Descending Speed (Empty/Full Load)	mm/s	75/80
	Max. Gradient (Empty/Full Load)	0	5
	Brake		Electromagnetic brake
	Driving Motor	KW	DC/1.5
	Lifting Motor	KW	DC/2.2
Battery	Capacity	V/AH	24/210



Powered and Non-powered Flatbed Trailer





Main features

- High load bearing: Made of high-strength steel and have excellent load bearing capacity to handle heavier loads
- Versatility: Have flexible configurations and parameters, can be used to transport a variety of goods in different industries and application scenarios.
- Efficiency: Produced on an assembly line, which can improve production, efficiency and precision, improves controlability and stability of the production process.
- Customizability: Can customize flatbed trucks for customers to meet the needs of different customers and with special needs and high-end demands.

Technical Parameters

ITEMS	SPECIFICATIONS				
Platform size	2500 × 2500 mm				
Rated Load Capacity	5Ton / 10 Ton / 15 Ton / 20 Ton / 35 Ton / 40 Ton / 45 To				
Deck Height	Approx. 700 mm				
Main Beam Material	Channel Steel #14				
Secondary Beam	Channel Steel #12, 5 m				
Deck Material	4 mm anti-slip checkered steel plate				
Tire Layout	4 pressed-fit solid tires (front and rear)				
Tow Bar Height	550 mm from ground, adjustable				
Steering Mechanism	One slewing bearing set (trailer-specific)				
Towing Method	Towed by forklift or tractor				
Safety Markings	Reflective warning strips				

Projects Executed

