



Dishaa[®]

ELECTRIC & MANUAL SHEARING MACHINE

CONTACT US

P.O. BOX: 80899, Dubai, UAE

Mob: +971 50 9696 477

Email: sajith@dishaagroup.com

Website: www.dishaagroup.com

Electric Shearing Machine



- ▶ Manual back guage with mm-counter
- ▶ Cutting line lighting
- ▶ Mobile 24V foot switch
- ▶ Automatic rubber-coated sheet hold
- ▶ Bench angle-stop

D11-3x2050




- ▶ PLC-control
- ▶ Cutting line lighting
- ▶ Mobile 24V foot switch
- ▶ Two sides shear blades
- ▶ Graphical control system with Finger touch screen
- ▶ Rear guarding with interlock
- ▶ Sheet hold down devices with rolling balls
- ▶ Sheet catcher, pneumatic type
- ▶ Motorized back-gauge with manual fine adjustment

D11-2x2550

Model	D11-3x1250	D11-3x2050	D11-4x1300	D11-2x2550
Max.shearing thickness(mm)	3.0	3.0	4.0	2.0
Max.shearing width(mm)	1250	2050	1300	2550
Shearing angle	2°	2°	2.4°	1.6°
No.of stroke (per ninute)	30	30	30	30
Motor power(kW)	3	4	4	4
Back gauge(mm)	630	630	630	630
Dimension(cm)	184×103×135	266×116×147	191x116x145	320x116x148
N.W./G.W.	980/1140	1520/1650	1320/1520	1900/2150

Manual Shearing Machine

- ▶ Cast iron frame
- ▶ With both front & back gauge
- ▶ Used for mild steel, aluminium copper, brass zinc plastic and leads
- ▶ High carbon and chrome steel blade

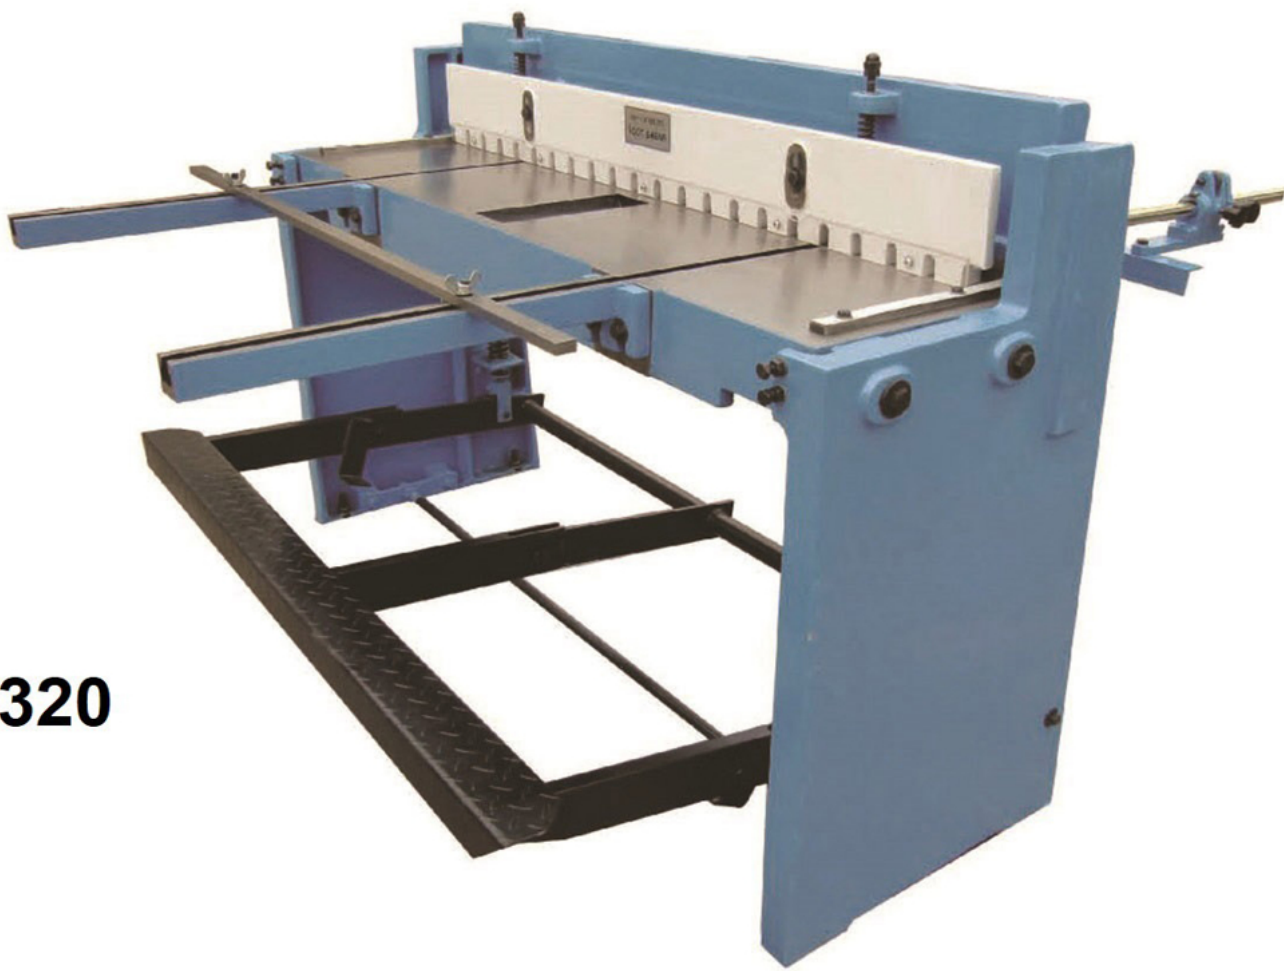

D01-1.5x1320



- ▶ Steel plate structure
- ▶ with Lower pedal
- ▶ Used for mild steel, aluminium copper, brass zinc plastic and leads
- ▶ High carbon and chrome steel blade

D01-1.5x1320A

- ▶ Used for mild steel, aluminium copper, brass zinc plastic and leads
- ▶ High carbon and chrome steel blade
- ▶ Hand control



D01-1.5x1500

Model	D01-1.0x1000	D01-1.5x1320	D01-2x1000	D01-1.5x1320A	D01-1.5x1500	D01-1.25x2000
Width (mm)	1000	1320	1000	1320	1500	2000
Max. shearing thickness (mm)	1.0	1.5	2.0	1.5	1.5	1.25
Back gauge range (mm)	0-840	0-840	0-840	0-840	0-300	0-300
Packing size (cm)	140×76×115	168×76×115	140×76×115	168×76×115	208×76×120	258×76×120
N.W./G.W.(kg)	365/410	491/545	430/490	460/520	445/515	511/600